


Dual USB Charger 2.1A Type A aluminium Simon 270

REF. 20000096-093

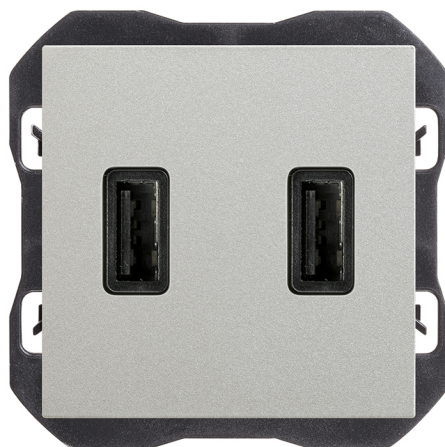

BASIC INFORMATION

FINISH

Aluminium

COMPATIBILITY

Simon 270 frames

ETIM CLASS

EC002949

MATERIAL

Plastic

PACKAGING CONTENTS

Mechanism, cover and
instruction sheet

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

No

MONOBLOCK

No

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

OPERATING TEMPERATURE RANGE (°C)

5 - 45 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

POWER SUPPLY (V~)

127/230 V~

FORMAT

USB

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

FREQUENCY

50 - 60 Hz

TYPE OF MECHANISM

Insertion

USB CURRENT (A)

2,1 A

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for flush mounting

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2009/125/EC ErP (Reg. UE 2019/1782) | Dir. 2011/65/UE RoHS + post. mod | EN 50563:2011 + A1:2013 | EN IEC 61000-3-2:2019 + A1:2021 + A2:2024 | EN IEC 62368-1:2020 + A11:2020 | EN 61000-3-3:2013 + A1:2019 + A2:2021 | EN IEC 63000:2018 | EN IEC 61000-6-1:2019 | EN IEC 61000-6-3:2021

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053277195

PRODUCT NET WEIGHT

0.062

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

242000

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053277195

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

80

PACKAGING NET WEIGHT

0.062

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING WIDTH

55

PACKAGING WEIGHT UNIT

KGM

UNITARY PACKAGING GROSS WEIGHT

0.062

PACKAGING LENGTH

55

