

Set of 2 switches 10AX 250V~ with fast terminal connection system champagne Simon 31

REF. 31398-34



BASIC INFORMATION

DESCRIPTION

Group of 2 switches in champagne colour and belonging to the series Simon 31. It offers a current of 10 AX and a voltage of 250V, quick terminal connection and its operation is tilting type. This group of 2 switches is available in 5 finishes and is always recommended to choose the frame in the same colour as the rocker selected. Its dimensions are 64 x 65 mm and supports a wire cross section of 1.5 to 2.5 mm, with a stripping of 11 mm and can be position, place in rooms with a temperature of between 5 and 40°C, reaching to withstand extreme temperatures of -25 to 50°C, approximately. Complies with the European standards and regulations UNE -s 60669-1: 2002 + A1: 2003 + A2: 2009 and is manufactured with metal components with halogen-free insulation and trim metallized thermoplastic. Its cleaning is quite simple to perform as it will only need to use a soft and dry cloth, without resorting to never use cloths or abrasive cleaners containing chlorine.

FINISH

Champagne

PACKAGING CONTENTS

Mechanism with rocker

COMPATIBILITY

Simon 31 frames

ETIM CLASS

EC001590

REMARKS

Available in 5 finishes. It is recommended to choose a frame the same colour as the selected rocker.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 AX

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP21

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Double

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLATION TYPE

Suitable for surface and flush
mounting

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

UNE-EN 60669-1:2002 + A1:2003 + A2:2009

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.094

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING VOLUME

3026595

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8421053008836

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0

UNITS CONTAINED PACKAGING

10

PACKAGING GROSS WEIGHT

0.942

UNITARY PACKAGING VOLUME
UNIT

MMQ

PACKAGING HEIGHT

83

PACKAGING NET WEIGHT

0.94

UNITARY PACKAGING GROSS
WEIGHT

0.094

PACKAGING WIDTH

165

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

221

MECANISMOS SIMON 31, 75, 77, 82 Y 88

Mecanismos básicos / Basic switches



Interrupor unipolar / Single-pole switch
XXXX101-XXX



Interrupor unipolar / Single-pole switch
7700101-039



Pulsador / Push button switch
XXXX150-XXX



Pulsador / Push button switch
7700150-039



Interrupor bipolar / Double pole switch
XXXX133-XXX



Conmutador / 2-way switch
XXXX201-XXX



Conmutador / 2-way switch
7700201-039



Conmutador cruce / Intermediate switch
XXXX251-XXX



Conmutador cruce / Intermediate switch
7700251-039




Grupo 2 interruptores / 2 switches group
XXXX398-XXX



Pulsador desconexión / Push button desconexión switch
XXXX152-XXX



Grupo dos conmutadores / 2-way switches group
XXXX397-XXX

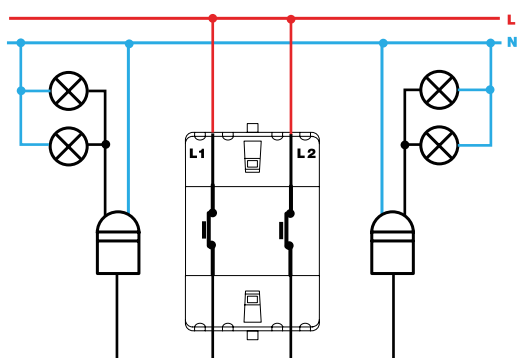

Grupo de pulsadores desconexión / Push button switch
desconexión group XXXX395-XXX



Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX



Interrupor unipolar / Single-pole switch
XXXX102-XXX



Interrupor con piloto / Push button pilot switch
7700112-039



Interrupor bipolar / Double pole switch
XXXX134-XXX



Conmutador / 2-way switch
XXXX202-XXX



Interrupor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX



Pulsador con luminoso / Push button switch with light
XXXX160-XXX



Pulsador con luminoso / Push button switch with light
7700160-039



Conmutador con luminoso / 2-way switch with light
XXXX204-XXX



Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX