

Set of 2 2-way switches 10AX 250V~ with fast terminal connection system aluminium Simon 31

REF. 31397-33



BASIC INFORMATION

DESCRIPTION

Group of 2 2-way switches of 10 AX and 250V with quick terminal connection, in aluminium colour of the series Simon 31. This group of 2 2-way switches is operating tilting and is available in 5 finishes and is always recommended to choose the frame with the same colour of the selected rocker. It supports a wire cross section of 1.5 to 2.5 mm with a stripped 11mm and can be position, place, to perfection, located in rooms with a temperature between 5 and 40°C, although it can withstand extreme temperatures of -25 to 50°C, approximately. It has 2 modules and complies with the European standards and regulations UNE -s 60669-1: 2002 + A1: 2003 + A2: 2009 standards and its dimensions are 64x65 mm For its manufacture, have been used metal components with halogen-free insulation and trim metallized thermoplastic materials, which are very easy to clean, as you will only have to wipe it with a soft and dry cloth, without resorting to the cloths or abrasive cleaners containing chlorine.

FINISH

Aluminium

PACKAGING CONTENTS

Mechanism with rocker

COMPATIBILITY

Simon 31 frames

ETIM CLASS

EC001590

REMARKS

Available in 5 finishes. It is recommended to choose a frame the same colour as the selected rocker.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 AX

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP21

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Double

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLATION TYPE

Suitable for surface and flush mounting

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

UNE-EN 60669-1:2002 + A1:2003 + A2:2009

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053071670

PACKAGING VOLUME

3.027

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

10

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

83

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING GROSS WEIGHT

0.097

PACKAGING WIDTH

165

PACKAGING NET WEIGHT

0.97

PRODUCT NET WEIGHT

0.097

PACKAGING LENGTH


221

PACKAGING WEIGHT UNIT


KGM

MECANISMOS SIMON 31, 75, 77, 82 Y 88


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XXXX101-XXX

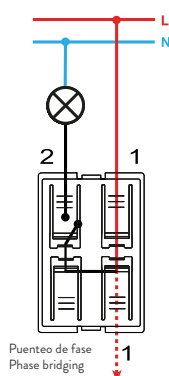


Interrupor unipolar / Single-pole switch
7700101-039




Pulsador / Push button switch
XXXX150-XXX




Pulsador / Push button switch
7700150-039

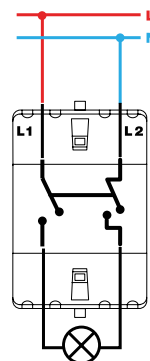


Interrupor bipolar / Double pole switch
XXXX133-XXX

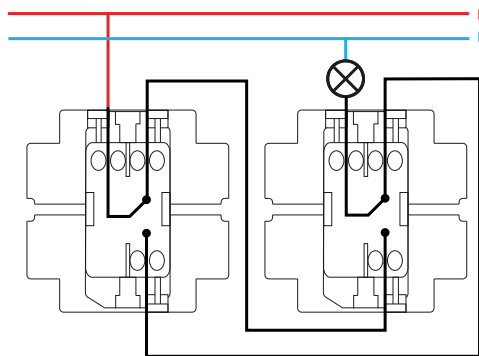


Conmutador / 2-way switch
XXXX201-XXX

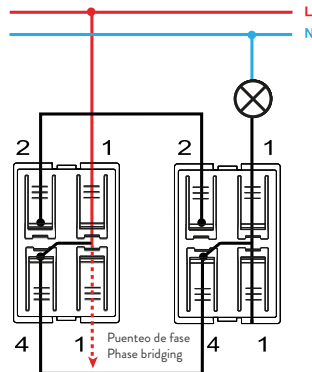


Conmutador / 2-way switch
7700201-039

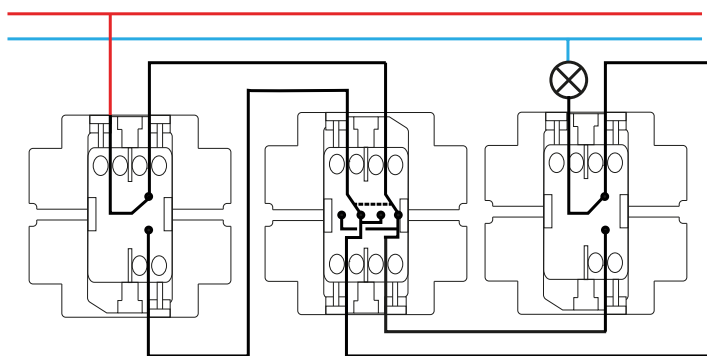


Conmutador cruce / Intermediate switch
XXXX251-XXX

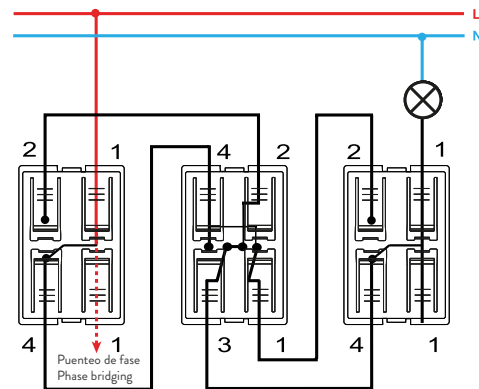


Conmutador cruce / Intermediate switch
7700251-039

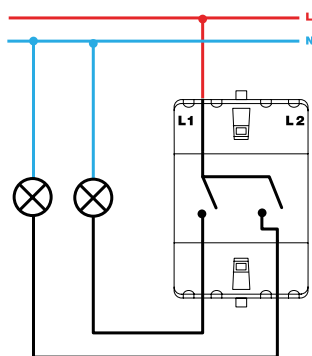


Grupo 2 interruptores / 2 switches group
XXXX398-XXX

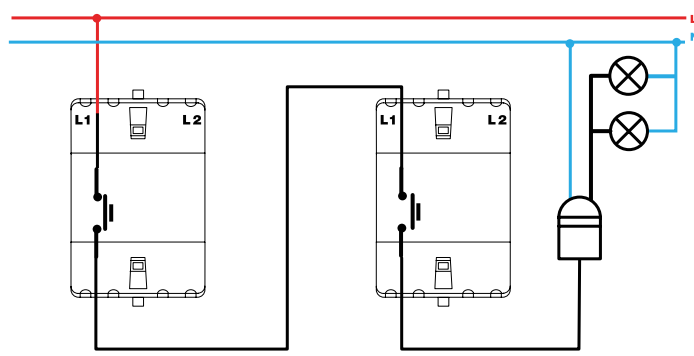


Pulsador desconexión / Push button disconnection switch
XXXX152-XXX

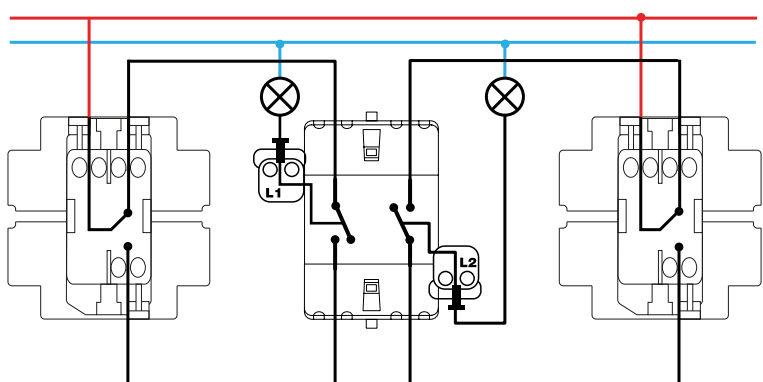


Grupo dos conmutadores / 2-way switches group
XXXX397-XXX

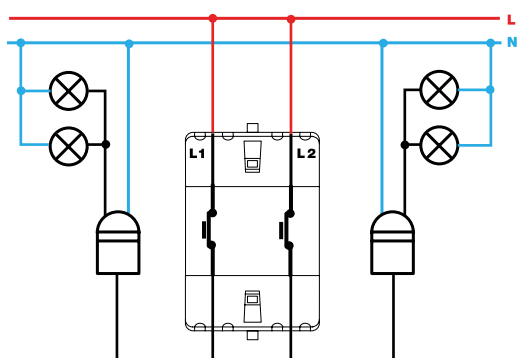


Grupo de pulsadores desconexión / Push button switch
disconnection group XXXX395-XXX

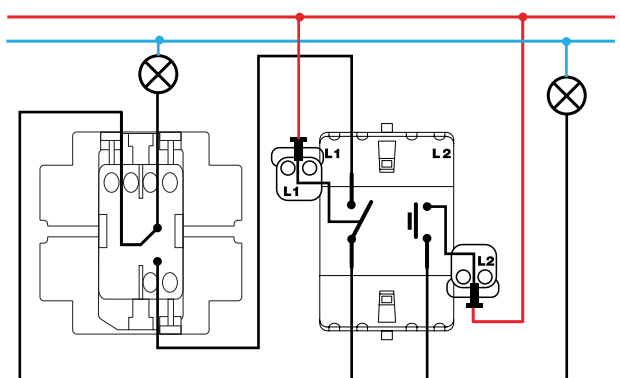


Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX




Interrupor unipolar / Single-pole switch
XXXX102-XXX

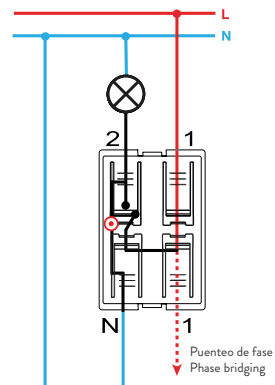


Interrupor con piloto / Push button pilot switch
7700112-039

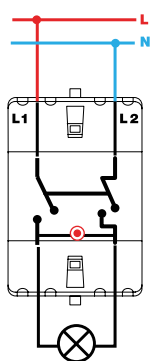


Interrupor bipolar / Double pole switch
XXXX134-XXX

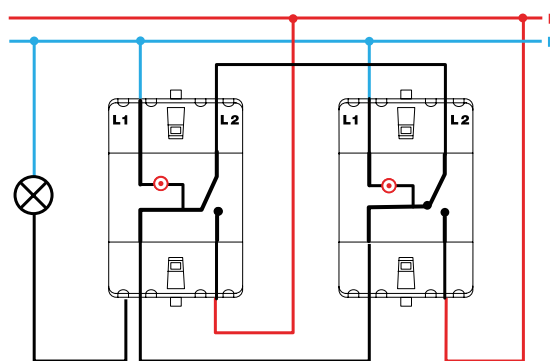


Conmutador / 2-way switch
XXXX202-XXX




Interruptor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX




Pulsador con luminoso / Push button switch with light
XXXX160-XXX

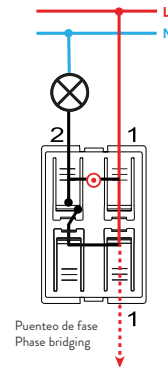

Pulsador con luminoso / Push button switch with light
7700160-039

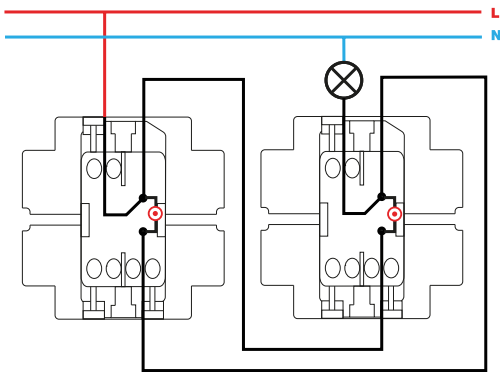

Conmutador con luminoso / 2-way switch with light
XXXX204-XXX

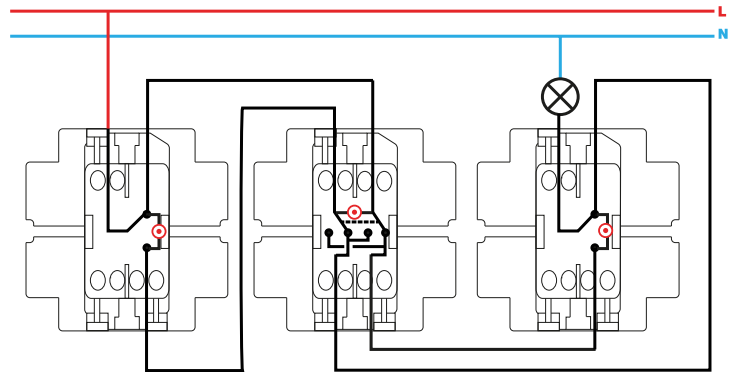

Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX