
# Flush-mount wall box for 4 double elements supplied in multiple Simon 500 Cima packaging

REF. **51020704-039**

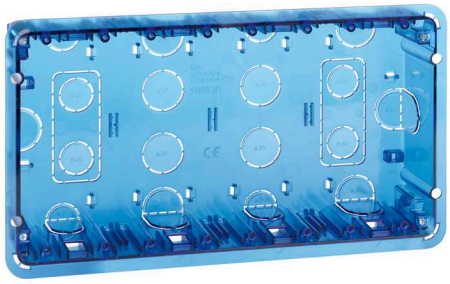

## BASIC INFORMATION

### MATERIAL

Plastic

### COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms using a specific adaptor

### PACKAGING CONTENTS

Flush-mount wall box, protective cover for box, metal partition wall and film for covering the pre-punched items on the box

### ETIM CLASS

EC002601

### REMARKS

The flush-mount box can be used as a template during installation thanks to the guides for marking the perimeter of the box

## TECHNICAL INFORMATION

### AVAILABLE MARKET
CE

### AVAILABLE IN
1, 2, 3, 4 and 6 double elements

### NUMBER OF CLAMP-HOLDER HOLES
14

### DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

### MAX TEMP DURING CONSTRUCTION WORK (°C)
+90 °C

### ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housing fitted into the box for this purpose.

### NUMBER OF ENCLOSURES FOR GROUND CONNECTION
2

### HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

### IK CLASSIFICATION
07

### INSULATION RESISTANCE (V-MΩ)
>5MOhms at 500V

### IP RATING
IP4X

### KIT AVAILABILITY
No

### MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

### NUMBER OF MODULES
8

### NUMBER OF PRE-PUNCHED HOLES 30 X 70 MM
2

### RECESS DIMENSION (MM)
262 x 141 mm

### NUMBER OF SIDE ENTRANCES
2

### VERSION
4 double elements

## INSTALLATION AND MAINTENANCE

### CLAW RANGE OF OPERATION (MM)
Between 4 and 30 mm

### REMOVAL OF COMPONENTS
Only with tool

### EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

### TYPE OF FASTENING
Using the claws included in the enclosure, in combination with aggregates, binders, additives, etc.

### INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

### INSTALLATION TYPE
Suitable for flush mounting on the wall

## REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-1:2005

## LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

26

UNITARY PACKAGING WIDTH

58

UNITARY PACKAGING LENGTH

86

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

129688

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.24

PRODUCT NET WEIGHT

0.24

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053114117

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

20

PACKAGING WIDTH

80

PACKAGING LENGTH

120

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

31.655

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT


0


PACKAGING NET WEIGHT

2.4


PACKAGING WEIGHT UNIT

KGM

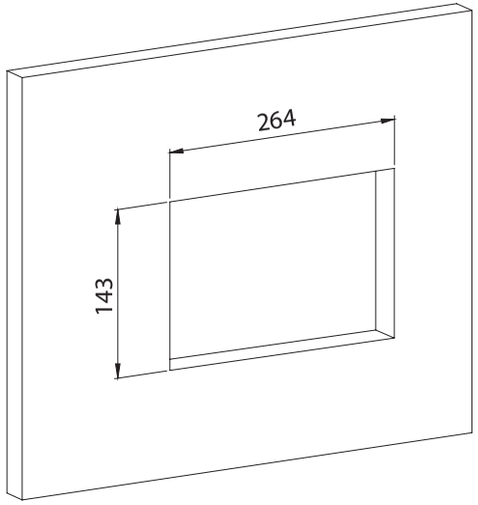

Tabique obra



Tabique hueco

•Grosor pared de 4 a 30mm

