

# Set of 2 2-way switches 10AX 250V~ with fast terminal connection system white Simon 31

REF. 31397-30



## BASIC INFORMATION

### DESCRIPTION

Security and innovation are two of the features that stand out in all products included in the Simon 31 series. These two qualities are also present in the group of 2 2-way switches 10AX 250V~ with quick terminal connection system in white finish included in this range of Simon, a mechanism is available in 5 finishes, a circumstance that allows you to choose the frame with the same colour of the selected rocker. The materials with which it has been made stand out for its metal components with halogen-free thermoplastic insulation and thermoset trim. With dimensions of 64x65 mm, a cable section of 1.5 to 2.5 mm and a wire stripping of 11 mm, this is a unit of 2 2-way switches, perfect for both private homes and large public and private buildings with a lot of activity and traffic of people throughout the day.

### FINISH

White

### PACKAGING CONTENTS

Mechanism with rocker

### COMPATIBILITY

Simon 31 frames

### ETIM CLASS

EC001590

### REMARKS

Available in 5 finishes. It is recommended to choose a frame the same colour as the selected rocker.

## TECHNICAL INFORMATION

|                                                   |                                                                                                                     |                                               |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| AVAILABLE MARKET<br>CE                            | CURRENT (A)<br>10 AX                                                                                                | NOMINAL VOLTAGE (V~)<br>250 V~                |
| CABLE SECTION ADMITTED (MM)<br>From 1,5 to 2,5 mm | IP RATING<br>IP21                                                                                                   | OPERATING TEMPERATURE RANGE (°C)<br>5 - 40 °C |
| NUMBER OF POSSIBLE ELEMENTS<br>1 element          | MAINTENANCE<br>Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine. | STORAGE TEMPERATURE RANGE (°C)<br>-25 - 50 °C |
| INDICATOR FUNCTION<br>No                          | TYPE OF MECHANISM<br>Pivoting                                                                                       | VERSION<br>Double                             |

## INSTALLATION AND MAINTENANCE

|                                                      |                                                              |
|------------------------------------------------------|--------------------------------------------------------------|
| CABLE STRIPPING NECESSARY (MM)<br>11                 | INSTALLATION TYPE<br>Suitable for surface and flush mounting |
| INSTALLABLE IN FLUSH MOUNT JUNCTION BOX<br>Universal | TYPE OF TERMINAL CONNECTION - FUNCTION 1<br>Fast             |

## REGULATIONS

### REGULATIONS

UNE-EN 60669-1:2002 + A1:2003 + A2:2009

## LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT  
0

UNITARY PACKAGING WEIGHT  
UNIT  
KGM

PACKAGING MEASUREMENT  
UNIT  
MMT

UNITARY PACKAGING WIDTH  
0

PACKAGING EAN  
8421053005972

PACKAGING VOLUME  
3026595

UNITARY PACKAGING LENGTH  
0

UNITS CONTAINED PACKAGING  
10

PACKAGING VOLUME UNIT  
MMQ

UNITARY PACKAGING VOLUME  
0

PACKAGING HEIGHT  
83

PACKAGING GROSS WEIGHT  
0.89

UNITARY PACKAGING GROSS  
WEIGHT  
0.089

PACKAGING WIDTH  
165

PACKAGING NET WEIGHT  
0.89


PRODUCT NET WEIGHT  
0.089

PACKAGING LENGTH  
221


PACKAGING WEIGHT UNIT  
KGM

# MECANISMOS SIMON 31, 75, 77, 82 Y 88


## Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch  
XXXX101-XXX

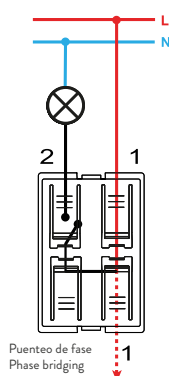


Interrupor unipolar / Single-pole switch  
7700101-039




Pulsador / Push button switch  
XXXX150-XXX




Pulsador / Push button switch  
7700150-039

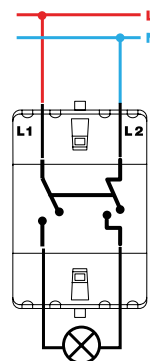


Interrupor bipolar / Double pole switch  
XXXX133-XXX

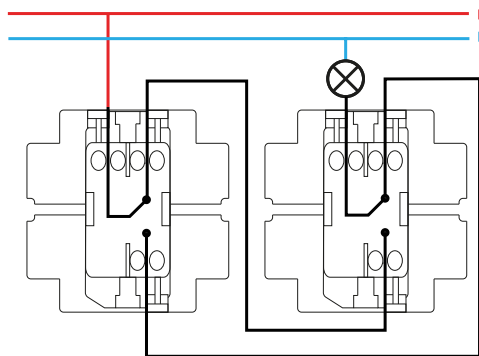


Conmutador / 2-way switch  
XXXX201-XXX

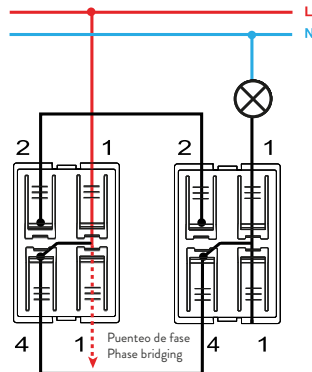


Conmutador / 2-way switch  
7700201-039

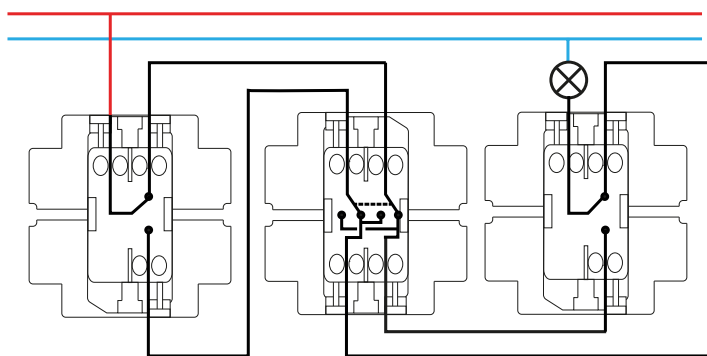


Conmutador cruce / Intermediate switch  
XXXX251-XXX

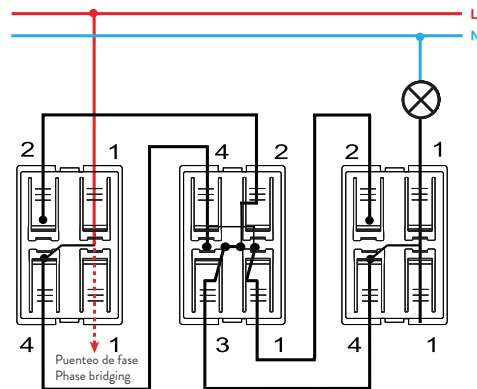


Conmutador cruce / Intermediate switch  
7700251-039

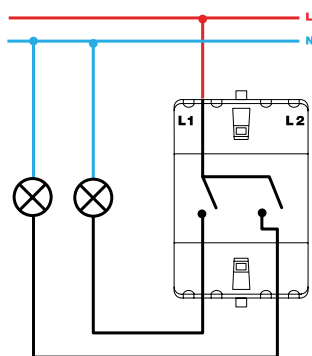


Grupo 2 interruptores / 2 switches group  
XXXX398-XXX

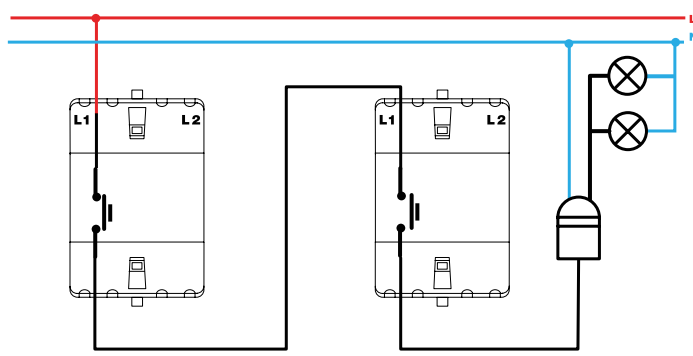


Pulsador desconexión / Push button disconnection switch  
XXXX152-XXX

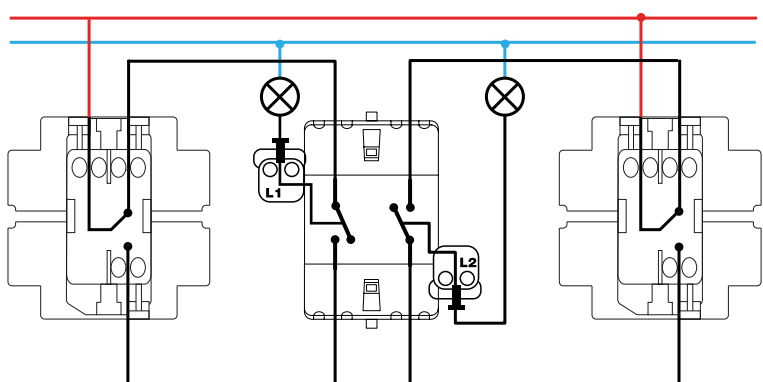


Grupo dos conmutadores / 2-way switches group  
XXXX397-XXX

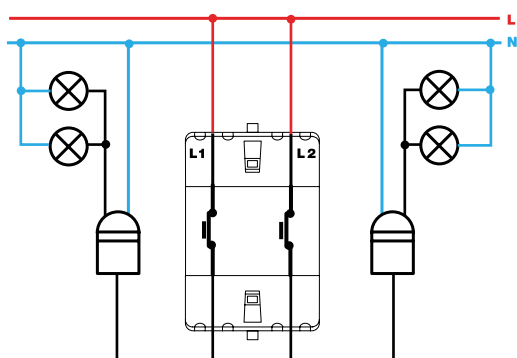


Grupo de pulsadores desconexión / Push button switch  
disconnection group XXXX395-XXX

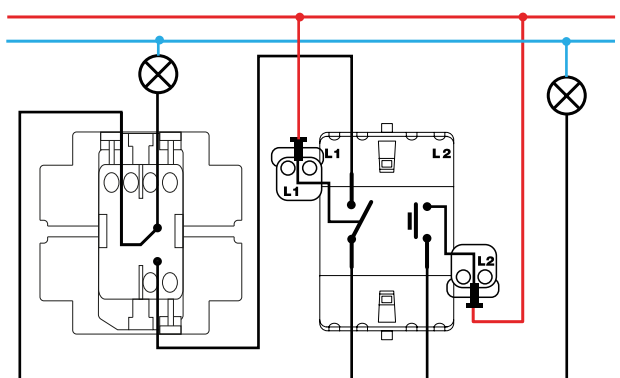


Grupo conmutador y pulsador / 2-way and push button switch group  
XXXX301-XXX




Interrupor unipolar / Single-pole switch  
XXXX102-XXX

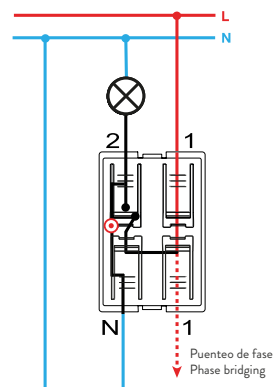


Interrupor con piloto / Push button pilot switch  
7700112-039

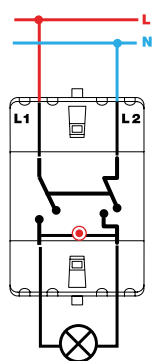


Interrupor bipolar / Double pole switch  
XXXX134-XXX

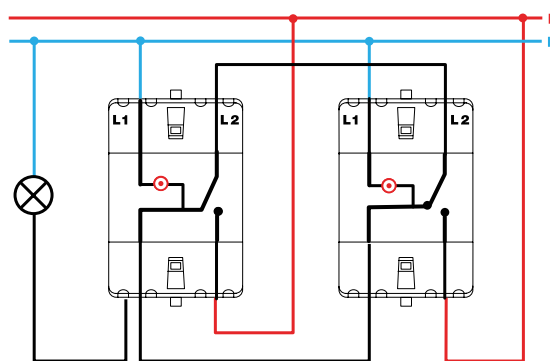


Conmutador / 2-way switch  
XXXX202-XXX




Interrupor unipolar con luminoso / Single-pole switch with light  
XXXX104-XXX




Pulsador con luminoso / Push button switch with light  
XXXX160-XXX

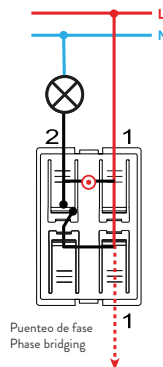

Pulsador con luminoso / Push button switch with light  
7700160-039

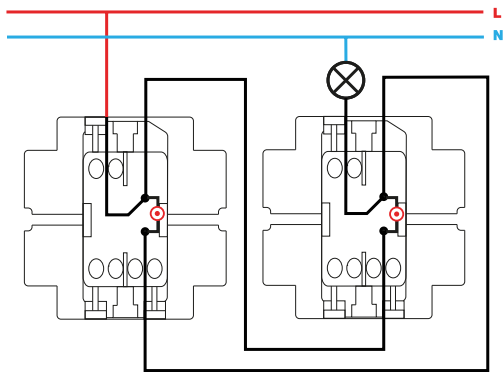

Conmutador con luminoso / 2-way switch with light  
XXXX204-XXX

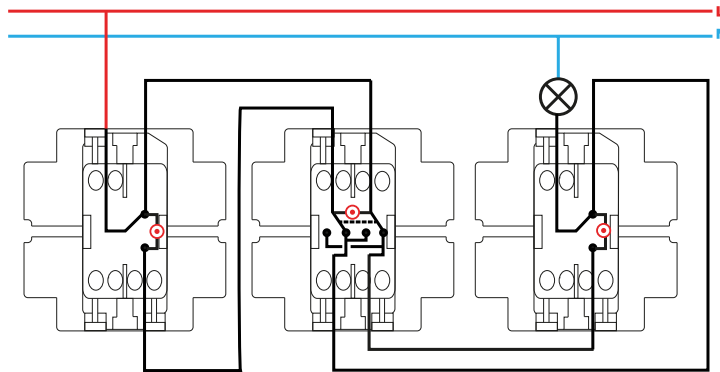

Conmutador cruce con luminoso / Intermediate switch with light  
XXXX254-XXX