
# Depth expander 3 double elements for surface or flush-mount wall box aluminium Simon 500 Cima

REF. **51030903-033**

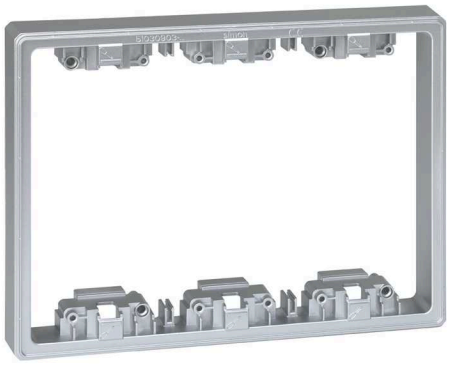

## BASIC INFORMATION

### FINISH
Aluminium

### MATERIAL
Plastic

### COMPATIBILITY
Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms using a specific adaptor

### PACKAGING CONTENTS
Depth expander, metal partition wall and installation manual

### ETIM CLASS
EC002328

### REMARKS
The depth expander ensures the perfect fit of all categories of RJ45 connectors on the market in combination with flat voice and data plates.

## TECHNICAL INFORMATION

### AVAILABLE MARKET
CE

### AVAILABLE IN
3 and 4 double elements

### DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

### MAX TEMP DURING CONSTRUCTION WORK (ºC)
+60 ºC in surface-mount wall installation and +90 ºC in flush-mount wall installation

### ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housings fitted into the selected wall enclosure.

### HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

### IK CLASSIFICATION
07

### INSULATION RESISTANCE (V-MΩ)
>5MOhms at 500V

### IP RATING
IP4X

### KIT AVAILABILITY
No

### MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

### NUMBER OF MODULES
6

### RECESS DIMENSION (MM)
141 x 199 mm (* para instalação encastrada na parede)

### VERSION
3 double elements

## INSTALLATION AND MAINTENANCE

### REMOVAL OF COMPONENTS
Only with tool

### EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

### TYPE OF FASTENING
Using the screws supplied

### INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

### INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

### INSTALLATION TYPE
Suitable for flush mounting or surface mounting onto wall in combination with the corresponding enclosure

## REGULATIONS

### REGULATIONS
Directive 2014/35/UE LVD + EN 60670-1:2005

## LOGISTICS INFORMATION

### UNITARY EAN CODE
8421053092194

### UNITARY PACKAGING HEIGHT
0

### UNITARY PACKAGING WIDTH
0

### UNITARY PACKAGING LENGTH
0

### UNITARY PACKAGING VOLUME
0

### UNITARY PACKAGING GROSS WEIGHT
0.278

### PRODUCT NET WEIGHT
0.278

### UNITARY PACKAGING WEIGHT UNIT
KGM

### PACKAGING EAN
8421053092194

### UNITS CONTAINED PACKAGING
1

### PACKAGING HEIGHT
52

### PACKAGING WIDTH
165

### PACKAGING LENGTH
225

### PACKAGING MEASUREMENT UNIT
MMT


### PACKAGING VOLUME
1.93

### PACKAGING VOLUME UNIT
DMQ

### PACKAGING GROSS WEIGHT
0

### PACKAGING NET WEIGHT
0.278

### PACKAGING WEIGHT UNIT
KGM

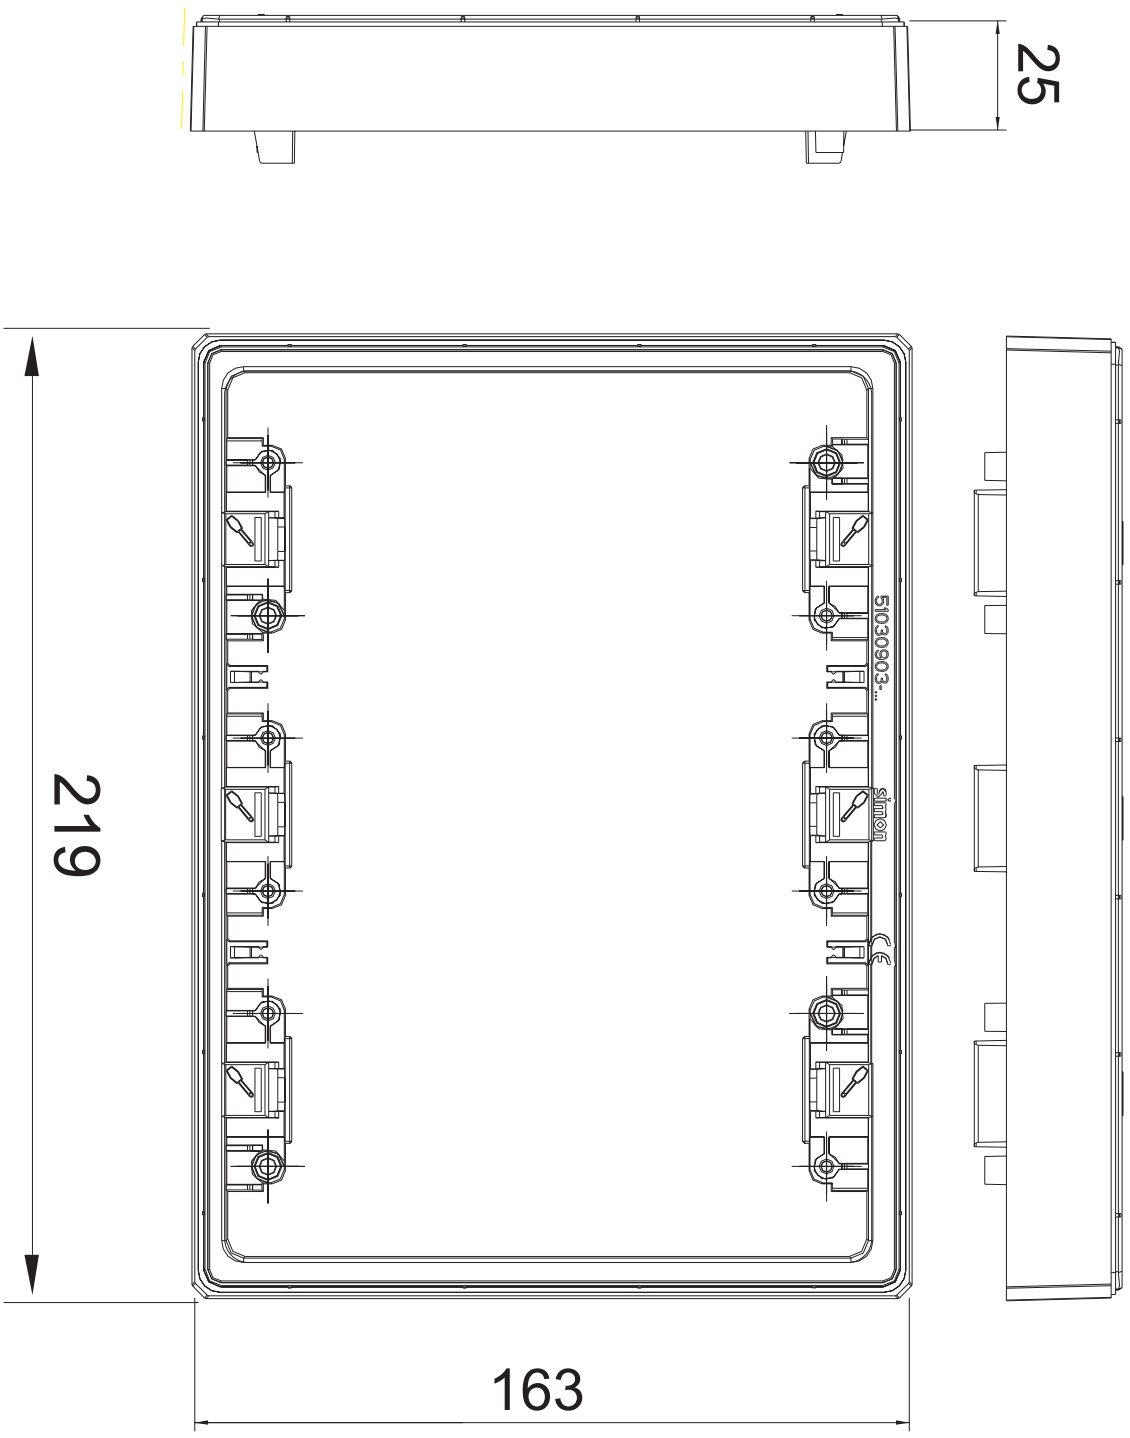
25
219
163
51030903-...
simon