


Digital time switch with programmable operation control and display

REF. 75818-39

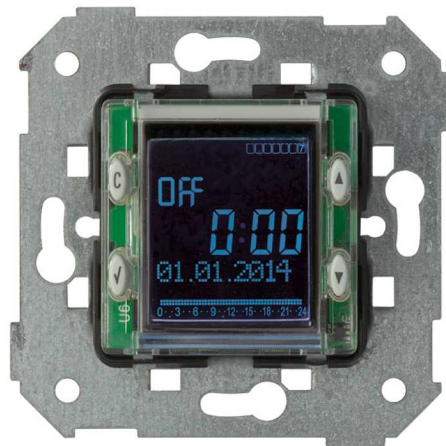

BASIC INFORMATION

DESCRIPTION

Digital time switch with programmable control of maneuvering with display belonging to the Simon 75 series, you can find the item in the "Timers and Clocks" category of the Simon 75 collection. Benefit from the ease of installation taken to the limit, thanks to the compatibility with the mechanisms of the Simon 77 series, you can leave the element installed in just three steps: Position, place, insert, tighten and ready to use. With the switch you can control the programming of the different elements of your home making it much more comfortable to interact when controlling the different elements of your home, handling the spaces with the easiest way you can find yourself. The type of terminal connection for the product is screwed and works by pulsation. As an added feature, it includes random mode to simulate presence. Its installation, it is suitable to be recessed or surface-mounted, choose the one that best suits your needs and of course those of your home.

COMPATIBILITY

Frames Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations, Simon 28, Simon 31, Simon 44 Aqua, Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88

PACKAGING CONTENTS

Digital time switch and instruction sheet

ETIM CLASS

EC001590

REMARKS

Includes random mode to simulate presence.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	FREQUENCY 50 Hz	MODE OF OPERATION Digital
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	INDICATOR FUNCTION No	POWER SUPPLY (V~) 230 V~
NUMBER OF CONTACTS 5	IP RATING IP20	RELAY OUTPUT CURRENT (A) 8A (2 A Inductive)
NUMBER OF CONTROLLABLE CIRCUITS 1	MAXIMUM QUANTITY PER CIRCUIT 1	STORAGE TEMPERATURE RANGE (°C) -20 - 75 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	OPERATING TEMPERATURE RANGE (°C) 0 - 40 °C	VERSION Single
		NUMBER OF WIRES 4

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 8	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27		

REGULATIONS

REGULATIONS

UNE-EN 60730-1:2003 + A1:2005 + A12:2004 + A13:2005 + A14:2007 + A16:2008 + A2:2009

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053069561

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

329232

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.125

PRODUCT NET WEIGHT

0.125

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053069561

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

57

PACKAGING WIDTH

76

PACKAGING LENGTH

76

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

0.329

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.125

PACKAGING WEIGHT UNIT

KGM