


Rocker for single-pole switching mechanisms for 1 element black Simon K45

REF. K109/14

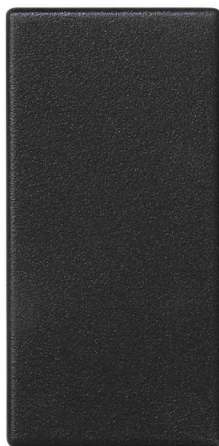

BASIC INFORMATION

DESCRIPTION

Changing the image of a room is as easy as clicking on the frame with any of the rockers available in the series Simon K45. In this range we have the Rocker for single-pole switching mechanisms of an element in black colour, for its installation it is necessary to use a universal recessed box or, in its absence, a baseboard surface-mounted. This rocker is available in quarter and half module versions, although it is not possible to combine 2 narrow rocker for control mechanisms with in a adaptor plate Simon 500 Cima-Simon K45. The rocker, whose dimensions are 45 x 22.5 x 10 mm, has been manufactured with halogen-free thermoplastic, materials that guarantees no flame propagation in case of fire and the low toxicity in case of smoke, which increases the security of electrical installations.

FINISH

Black

MATERIAL

Plastic

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Rocker and installation manual

ETIM CLASS

EC000011

REMARKS

It is not possible to combine 2 narrow button control mechanisms on a Simon 500 Cima-Simon K45 adapter plate

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

AVAILABLE IN

Quarter and half module versions

KIT AVAILABILITY

No

NUMBER OF MODULES

Four

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

RAL

7021

INDICATOR FUNCTION

No

VERSION

Single

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

Fixing by direct snap-fit, no tools needed

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.006

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING VOLUME

544320

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436047013

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

544320

UNITS CONTAINED PACKAGING

10

PACKAGING GROSS WEIGHT

0.06

UNITARY PACKAGING VOLUME
UNIT

MMQ

PACKAGING HEIGHT

72

PACKAGING NET WEIGHT

0.06

UNITARY PACKAGING GROSS
WEIGHT

0.006

PACKAGING WIDTH

72

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

105