

Flush-mounted Downlight 719 20W 4000K

REF. 71922030-984



BASIC INFORMATION

FINISH

White

PACKAGING

Box

APPLICATION

General lighting

ETIM CLASS

EC001744

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

POWER SUPPLY (V~)

220/240 V~

COLOR TYPE

WW

IP RATING

IP20


CONTROL

On/Off


OPTICS

Microprismatic

PHOTOMETRY ASSETS – CONICAL

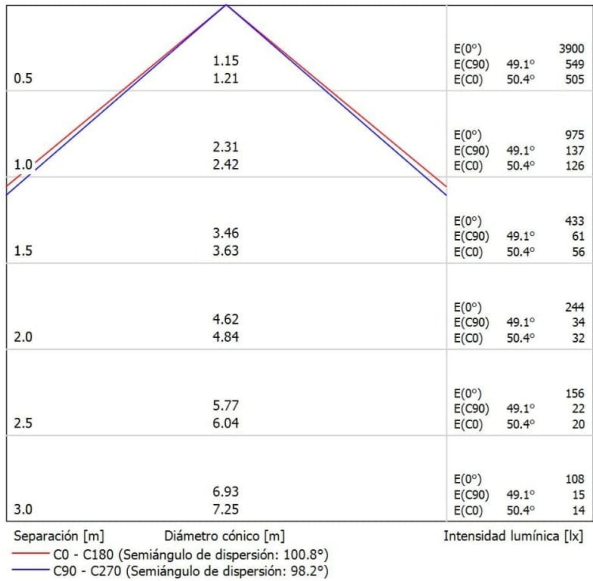

PHOTOMETRY ASSETS – POLAR

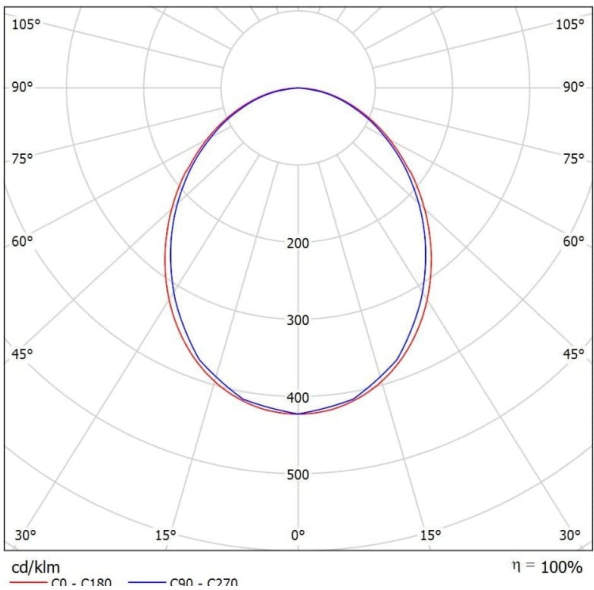

INSTALLATION AND MAINTENANCE

MINIMUM INSTALLATION
HEIGHT

35

REGULATIONS

WARRANTY

3 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053327012

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053327012

PACKAGING VOLUME

2025000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

40

PACKAGING GROSS WEIGHT

0.3

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

225

PACKAGING NET WEIGHT

0.21

UNITARY PACKAGING GROSS
WEIGHT

0.3

PACKAGING LENGTH

225

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.21