

Thermostat gloss white Simon 100

REF. 10000810-130



BASIC INFORMATION

FINISH

Gloss white

PACKAGING CONTENTS

Mechanism and instructions

ETIM CLASS

EC003263

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

5 A

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

TYPE OF CONNECTION

Two sons

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 75 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Touch

VERSION

Unique

FORMAT

Clima

VOLTAGE (V~)

127/230 V~

INDICATOR FUNCTION

No

MONOBLOCK

Yes

INSTALLATION AND MAINTENANCE

CLAW

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

universal

INSTALLATION DIRECTION

Horizontal, Vertical

INSTALLATION TYPE

Suitable for flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053201763

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.285

PRODUCT NET WEIGHT

0.285

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053201763

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

75

PACKAGING WIDTH

105

PACKAGING LENGTH

127

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1000125

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT


0

PACKAGING NET WEIGHT


0.285

PACKAGING WEIGHT UNIT


KGM



Instalación centralizada para caldera/bomba de calor
Centralized installation for boiler/heat pump

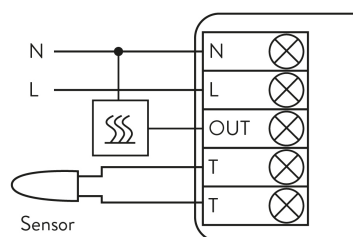

Instalación suelo radiante eléctrico
Installation with electric floor



Instalación zonificada a 230V con contacto Normalmente Abierto
230V installation with Normally Open contact

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet