


Voice and data flat plate for 1 element without dust cover for 1 R&M® RJ45 connector white Simon K45

REF. K054/9

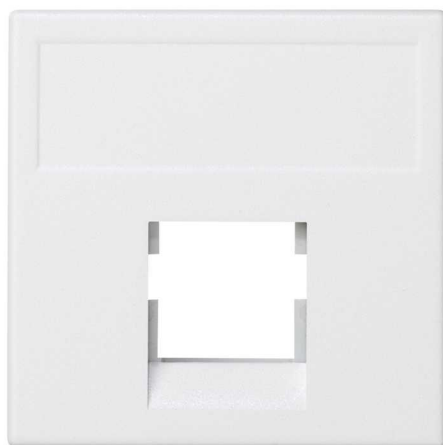

BASIC INFORMATION

DESCRIPTION

The series of panels and connectors for Simon K45 voice and data lawyer by the versatility in the manufacture of their products. This is a plate of voice and data, fully plate without dust shutter. It is optimal to an element for an RJ45 connector from R & M has a simple finish is white in colour. This is the individual version, half an element. The dimensions of the plate are 45 x 45 millimetres and a depth of 8.5 millimetres. It can be installed both flush mounted and on surface-mounted. If you want to combine the plate Simon with vertical enclosures, it is necessary to use the 90 ° positioner the signature reference (: K66). In this way is achieved to position the product vertically. It is manufactured in materials with thermoplastic insulation halogen-free. This makes the product can withstand extreme very variable temperatures and, ranging from -5 to the + 60 degrees centigrade. Also, the components to guarantee the manufacturing quality absolute of the plate.

FINISH

White

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-030)

PACKAGING CONTENTS

Flat voice and data plate without dust cover

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

COMPATIBLE WITH CONNECTORS

R&M® (Reichle de Massari®).Classic Series Cat5e (R925371, R925370) and Star Series Cat6 (R302373, R302372).

RJ45 CONNECTORS

Not included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

DUST PROTECTION

No

FORMAT

RJ45

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

NUMBER OF MODULES

Half

PLATE TYPE

Flat

RAL

9003

RJ45 ADAPTOR MODULE

Included in voice and data plate

SNAP-FIT RJ45 PLATES

R&M® RJ45 connectors

SNAP-FIT TYPE

R&M® RJ45 connectors

VERSION

Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-030)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
1472064

UNITARY PACKAGING VOLUME
UNIT
MMQ

UNITARY PACKAGING GROSS
WEIGHT
0.011

PRODUCT NET WEIGHT
0.011

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING EAN
8426436046900

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
88

PACKAGING WIDTH
123

PACKAGING LENGTH
136

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
1472064

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.22

PACKAGING NET WEIGHT
0.22

PACKAGING WEIGHT UNIT
KGM