Switch/Two-way switch for card with 2 microswitches with indicator light Simon 75

REF. **7500550-039**



BASIC INFORMATION

DESCRIPTION

The card switch with 2 microswitches and light indicator Simon 75 is a professional solution for energy control in hotels, tourist apartments, and tertiary buildings. This card switch allows for the activation or deactivation of the power supply by inserting a card, optimizing energy consumption and improving installation efficiency. It operates at 250 V~ with a maximum current of 10 A in resistive load (1.5 A inductive) and is designed to work alongside a contactor in higher demand installations. It includes a light indicator that facilitates the visualization of the circuit's status. The connection system using 2.8 mm Faston terminals allows for a secure and professional installation. Compatible with the Simon 75 series, Simon 82, and Simon 360 series, this card switch is ideal for hotel projects that require access control, energy savings, and reliable and durable electrical solutions. It complies with LVD and RoHS standards, ensuring safety and quality in interior installations.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Concept, Simon 82 Detail, Simon 82 Nature and Simon 82.

COMPATIBLE WITH MECHANICAL 2-WAY/CROSSOVER SWITCH

Yes

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

COMPATIBLE WITH MECHANICAL SWITCH

Yes

ETIM CLASS

EC001590

REMARKS

It is necessary to install a contactor at the output of the mechanism. If not done, the maximum current of the switch is 10 A resistive (1.5 A inductive). It is recommended to protect the faston connectors with heat shrink tubing.

TECHNICAL INFORMATION

ACOUSTIC FUNCTION
No

COMPATIBLE WITH ELECTRONIC AUXILIARY
No

COMPATIBLE WITH FLUORESCENT LAMPS WITH 1-10V DIMMABLE ELECTRONIC BALLAST
No

INDICATOR FUNCTION
Yes

CURRENT (A)
10 (1,5 ind.) A

IP RATING
IP20

LINKABLE
No

MAXIMUM POWER (W)
2500

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

RECESS DIMENSION (MM)
35

VOLTAGE (V~)
250 V~

NUMBER OF WIRES
3

INSTALLATION AND MAINTENANCE

CLAW
Simon 27

REMOVAL OF COVER
Only with tool

INSTALLATION DIRECTION
Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1
FastON 2.8mm

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.061

PRODUCT NET WEIGHT
0.061

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053208762

UNITS CONTAINED PACKAGING
5

PACKAGING HEIGHT
82

PACKAGING WIDTH
83

PACKAGING LENGTH
223

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
1517738

PACKAGING VOLUME UNIT
MMQ


PACKAGING GROSS WEIGHT
0


PACKAGING NET WEIGHT
0.305

PACKAGING WEIGHT UNIT
KGM

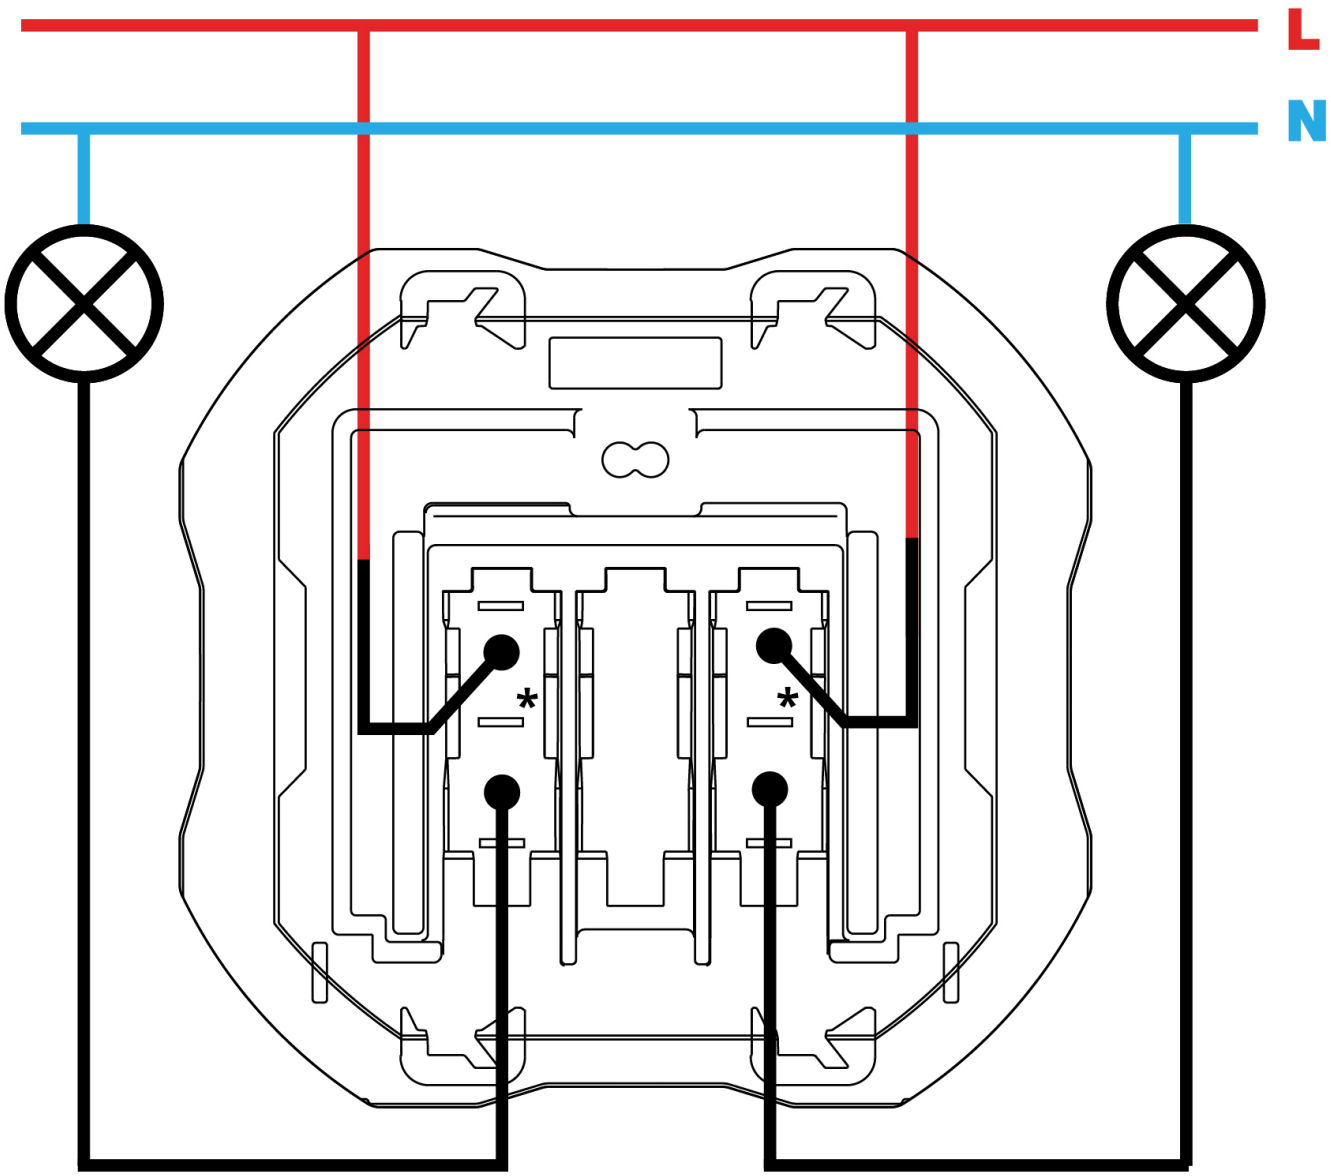

* Conexión con terminal faston
Conection with faston terminal



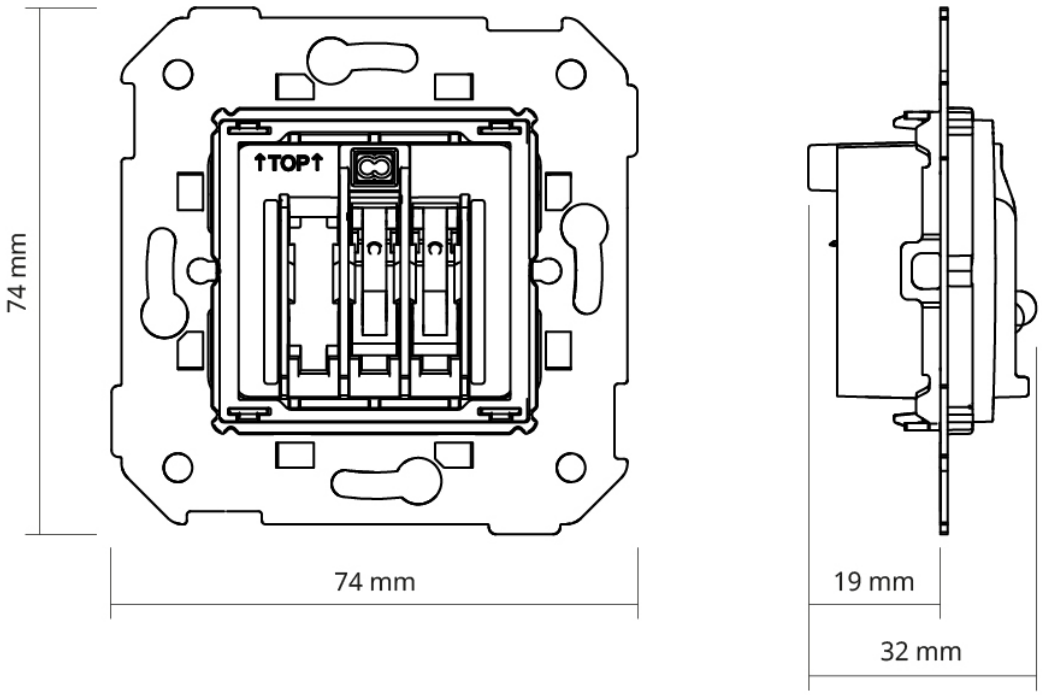
74 mm
↑TOP↑
74 mm
19 mm
32 mm