# Surface-mount wall box for 3 double elements white Simon 500 Cima

REF. **51000003-030**



## BASIC INFORMATION

### FINISH
White

### MATERIAL
Plastic

### COMPATIBILITY
Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using specific adaptors), combinable with the Simon Trunking range

### PACKAGING CONTENTS
Floor box, metal partition wall, ground connection cable, fixing studs, screws and installation manual

### ETIM CLASS
EC002600

### REMARKS
Alternatively, you can screw the frame holders into the box if you need extra fastening.

## TECHNICAL INFORMATION

### AVAILABLE MARKET
CE

### AVAILABLE IN
1, 2, 3, 4 and 6 double elements

### NUMBER OF CLAMP-HOLDER HOLES
10

### DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

### MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

### ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housings fitted into the box for this purpose.

### NUMBER OF ENCLOSURES FOR GROUND CONNECTION
2

### HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

### IK CLASSIFICATION
07

### INSULATION RESISTANCE (V-MΩ)
>5MOhms at 500V

### IP RATING
IP4X

### KIT AVAILABILITY
No

### MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

### NUMBER OF MODULES
6

### NUMBER OF PRE-PUNCHED HOLES 30 X 50 MM
2

### NUMBER OF PRE-PUNCHED HOLES 40 X 80 MM
0

### RAL
9003

### NUMBER OF SIDE ENTRANCES
5

### VERSION
3 double elements

## INSTALLATION AND MAINTENANCE

### REMOVAL OF COMPONENTS
Only with tool

### EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

### TYPE OF FASTENING
Using the screws supplied

### REMOVAL OF THE FRAME
Only with tool

### INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

### INSTALLATION TYPE
Suitable for surface-mount wall installation

## REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-1:2005

## LOGISTICS INFORMATION

UNITARY EAN CODE

8421053090688

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.58

PRODUCT NET WEIGHT

0.58

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053090688

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

90

PACKAGING WIDTH

170

PACKAGING LENGTH

230

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3519000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.58

PACKAGING NET WEIGHT

0.58

PACKAGING WEIGHT UNIT

KGM

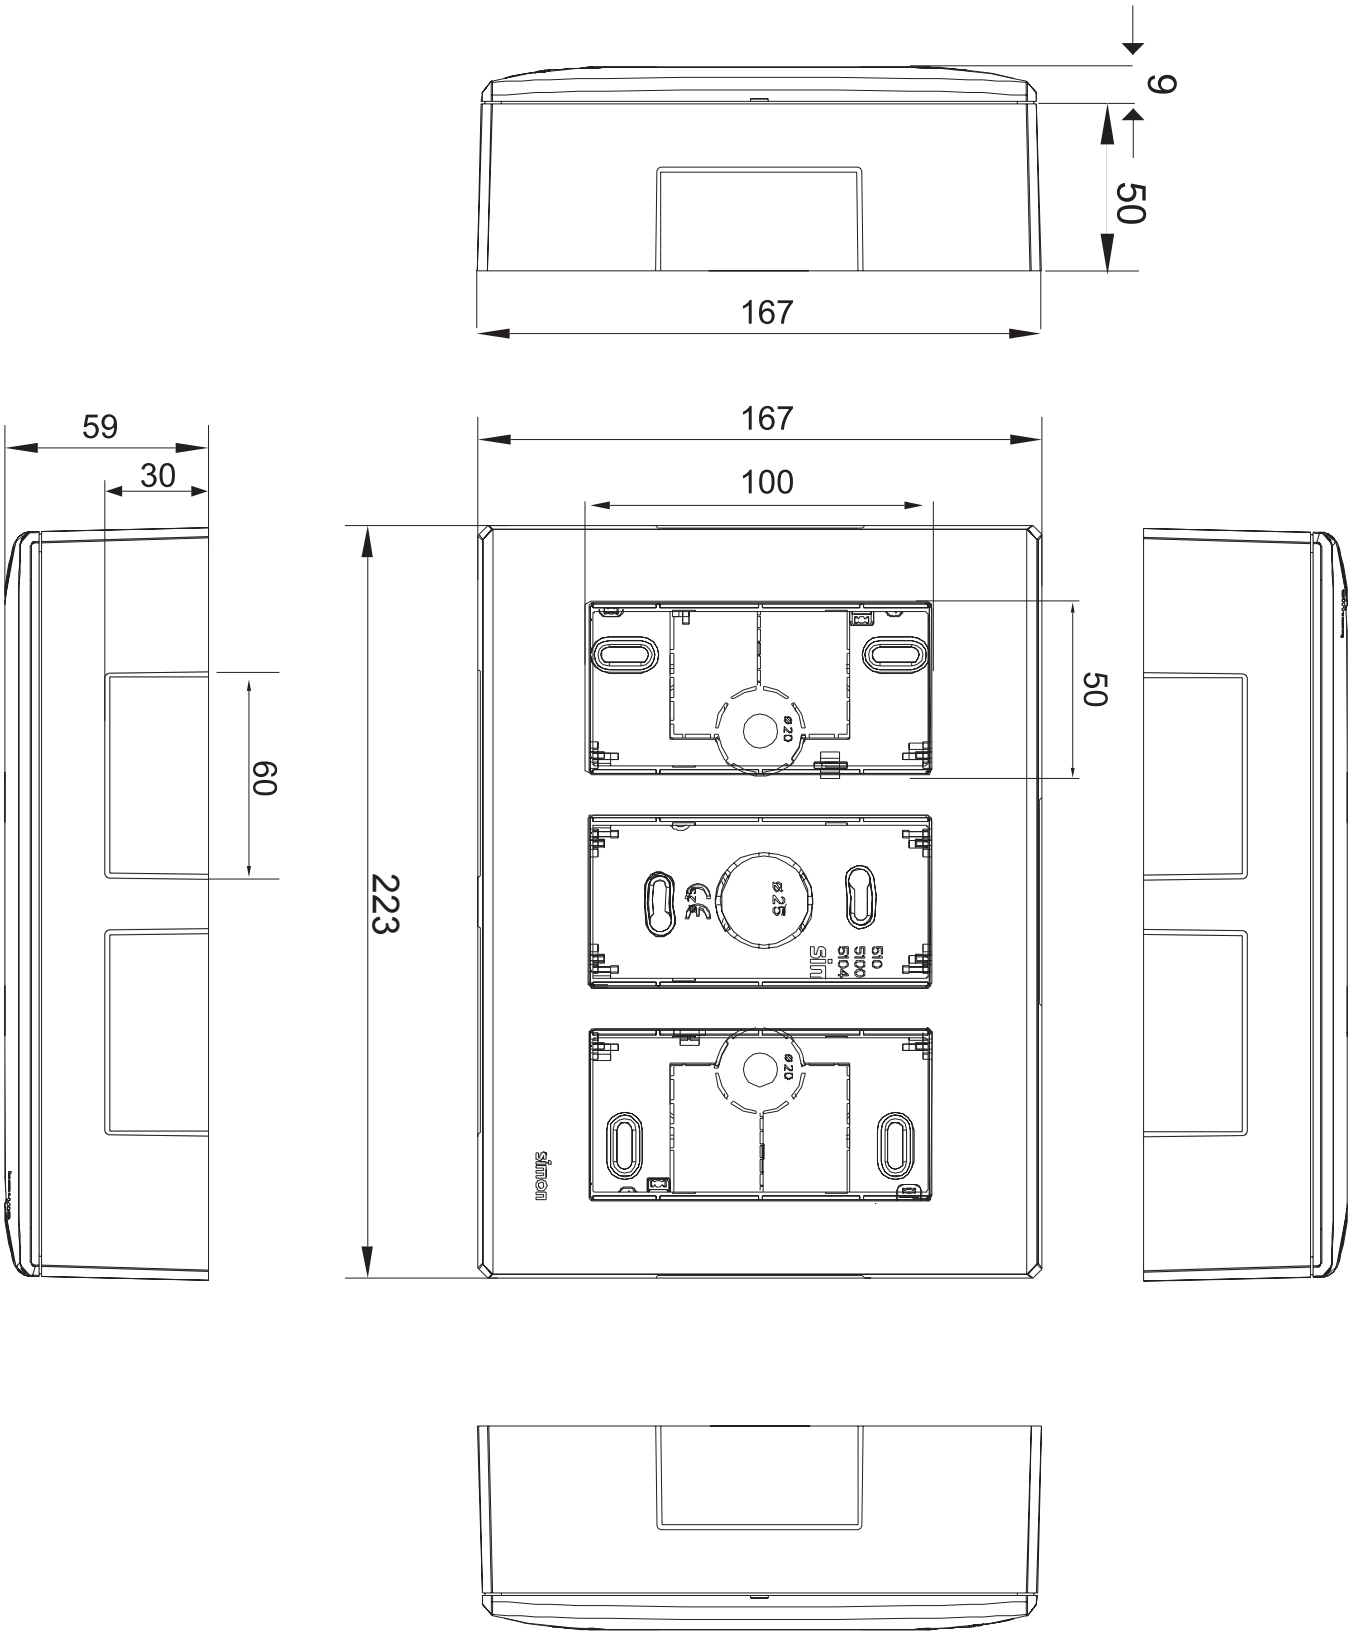
9
50
167
59
30
167
100
60
223
50
ø20
ø25
simon