Aluminium mini column with 1 side for 10 elements white Simon 500 Cima

REF. **52550115-030**



BASIC INFORMATION

DESCRIPTION

This mini column is from the Simon 500 Cima series. It is a column with one side with capacity to supply power to a total of 10 elements or electrical equipment. Its traditional white colour makes it ideal for any room in the home, office or premises it is placed, regardless of its decorative style and aesthetics. The column is very easy to install. It measures 709 x 110 millimetres and 72 millimetres of depth. It is made up of 10 modules and is suitable for the integration in any type of floor, concrete or raised, in addition to the shape of the baseboard allows integration of the product with floor trunking 85 x 18 millimetres. The manufacturing material of the aluminium mini column is of high quality, which gives a lot of resistance and a extra hardness that extends the service life of the product.

FINISH

White

MATERIAL

Aluminium

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

PACKAGING CONTENTS

Mini column, baseboard, lower and upper trim, non-slip adhesive foam, fixing studs, ground connection cable, screws and installation manual

ETIM CLASS

EC001941

REMARKS

The shape of the baseboard allows integration of the mini column with the 85 x 18 mm floor trunking

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
1 and 2 sides

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+120 ºC

EARTHING RESISTANCE
< 0.05 Ohms

ELECTRICAL PROPERTIES
With electrical continuity

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Constant clearance between electric wiring and Voice, Data and Multimedia cables, eliminating electromagnetic interference and possible transmission errors.

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-25 to +120 ºC

NUMBER OF MODULES
10

RAL
9003

VERSION
1 side

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Vertical

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

SCREWS REQUIRED FOR FLOOR FIXING
4

REMOVAL OF TRIM FRAMES
Only with tool

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053094402

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
2.125

PRODUCT NET WEIGHT
2.125

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053094402

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
86

PACKAGING WIDTH
129

PACKAGING LENGTH
1032

PACKAGING MEASUREMENT UNIT
MMT

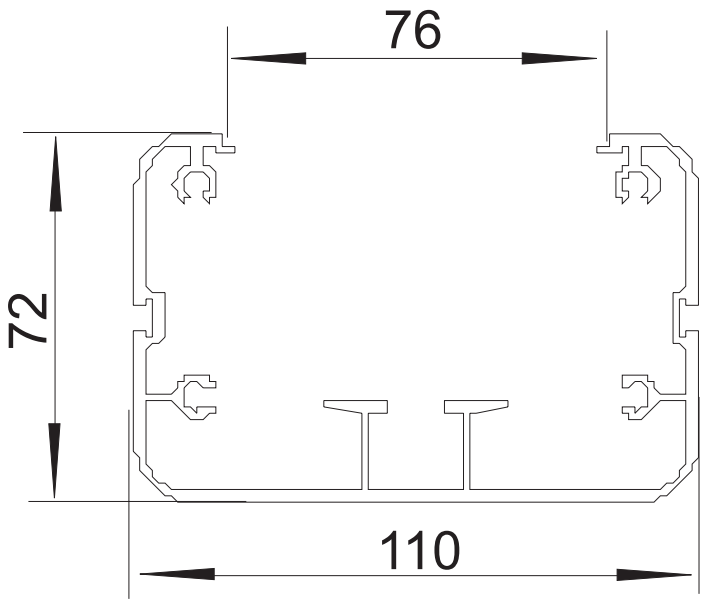
PACKAGING VOLUME
20601360

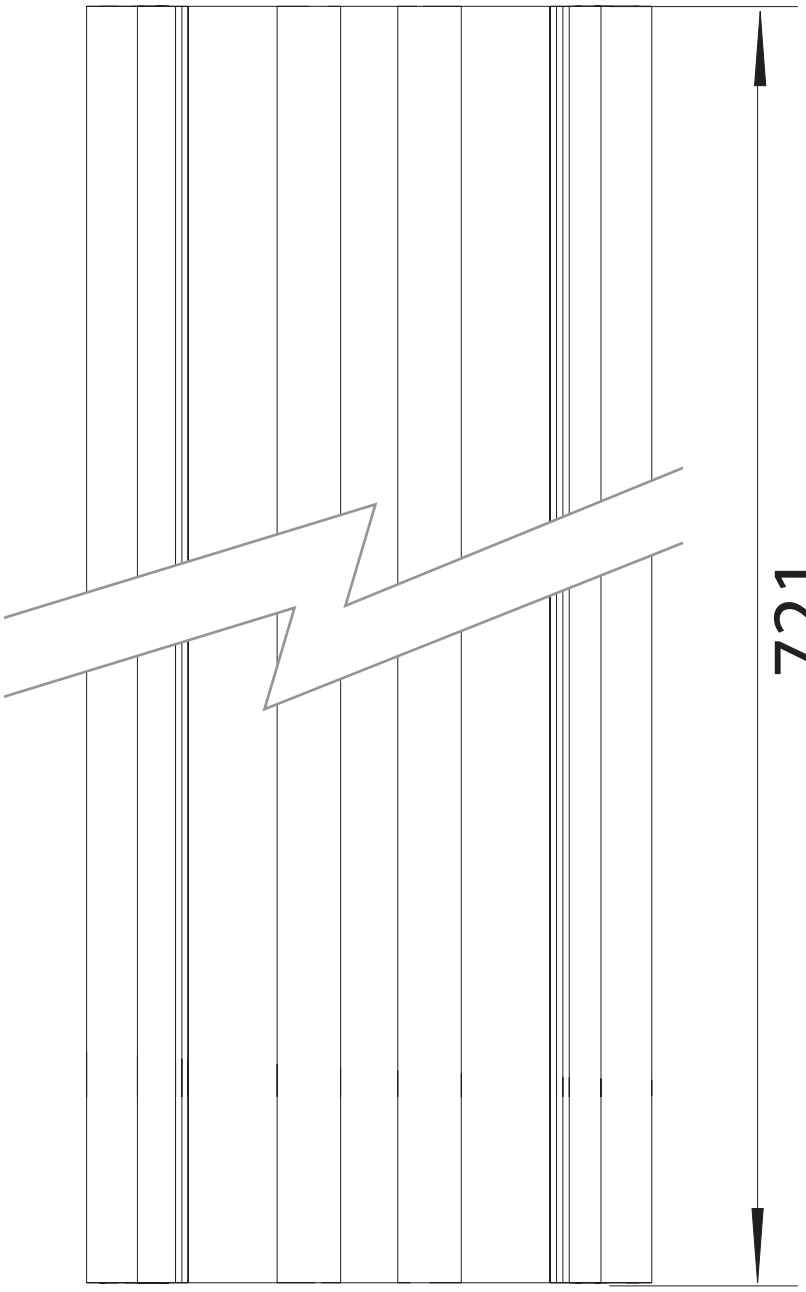
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
2.125

PACKAGING WEIGHT UNIT
KGM


76
72
110


721