


Switch for card with 2 micro switches and light indicator 250V~

REF. 26550-39

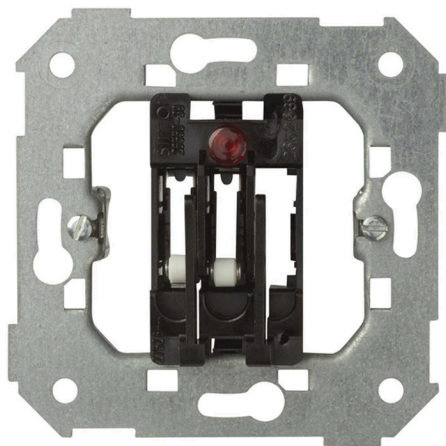

BASIC INFORMATION

DESCRIPTION

The Simon 82 series includes special control mechanisms, one of the biggest sellers is the 2-way switch for card with 2 micro switches and indicator light. With a current of 6A and voltage of 250V~, this element will give always a solution for every electrical system. It has a welding / Faston terminal connection system, so it is recommended to perform the installation by linking the item to a relay. If not, the maximum current of the 2-way switch is 6A (2 A inductive). 2-way switch mechanisms are installed when a lighting point is activated from multiple locations. Suitable for surface and flush mounting, this piece supports a cable section of 0.5 mm. It has been designed with the best metal components with halogen-free thermoplastic insulation. Its value for money is another of its features, as is the ease of cleaning of its structure to prevent it from deteriorating, besides being manufactured to withstand extreme temperatures.

COMPATIBILITY

Simon 27 Play, Simon 27 Neos,
Simon 27 Scudo, Simon 27,
Simon 44 Aqua, Simon 75, Simon
82 Detail, Simon 82 Nature and
Simon 82 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

A contactor must be installed at the output of the mechanism. If this is not done, the maximum current of the switch is 10 A resistive (1.5 A inductive). It is recommended to protect the faston connectors with a heat shrink sleeve.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 (1,5 ind.) A

POWER SUPPLY (V~)

250 V~

CABLE SECTION ADMITTED (MM)

0,5 mm

IP RATING

IP20

STORAGE TEMPERATURE RANGE

(°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Card

VERSION

Single

INDICATOR FUNCTION

Yes

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CLAW

Simon 27

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

Faston

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush
mounting

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN IEC 61058-1:2018 | EN 61058-1-1:2016 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053250099

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

3017190

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.052

PRODUCT NET WEIGHT

0.052

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053048566

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

82

PACKAGING WIDTH

165

PACKAGING LENGTH

223

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3017190

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.575

PACKAGING NET WEIGHT

0.52

PACKAGING WEIGHT UNIT

KGM