


Bus coupling unit with LON system

REF. 8000100-039

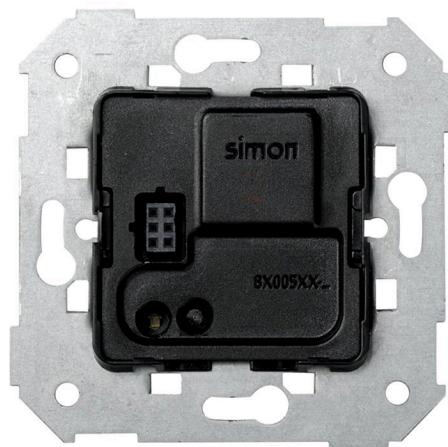

BASIC INFORMATION

PACKAGING CONTENTS

Coupling unit and instructions

ETIM CLASS

EC000634

TECHNICAL INFORMATION

AVAILABLE MARKET CE	INPUT TYPE Digital, volt-free	POWER SUPPLY (V~) 24 Vdc
CABLE SECTION ADMITTED (MM) From 0,5 to 2,5 mm	CURRENT (A) 27,6 mA	PROTOCOL LonWorks
NUMBER OF POSSIBLE ELEMENTS 1 element	IP RATING IP20	PROGRAMMING PUSH BUTTON Yes
INDICATOR FUNCTION No	MAXIMUM VOLTAGE AT THE INPUT (VCC) 24 V DC	RELATIVE HUMIDITY From 20 to 85% (without condensation)
INPUT INTENSITY (MA) 12	OPERATING TEMPERATURE RANGE (°C) 0 - 45 °C	STORAGE TEMPERATURE RANGE (°C) 25 - 70 °C

INSTALLATION AND MAINTENANCE

BUS CONNECTION TYPE OF TERMINAL CONNECTION Por inserción	CLAW Optional	INSTALLATION TYPE Suitable for surface and flush mounting
CABLE STRIPPING NECESSARY (MM) 8	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

EN 50428; EN 60669; EN 50491-1; EN 50491-2

LOGISTICS INFORMATION

UNITARY EAN CODE 8421053125571	UNITARY PACKAGING WEIGHT UNIT KGM	PACKAGING MEASUREMENT UNIT MMT
UNITARY PACKAGING HEIGHT 0	PACKAGING EAN 8421053125571	PACKAGING VOLUME 0.329
UNITARY PACKAGING WIDTH 0	UNITS CONTAINED PACKAGING 1	PACKAGING VOLUME UNIT DMQ
UNITARY PACKAGING LENGTH 0	PACKAGING HEIGHT 57	PACKAGING GROSS WEIGHT 0
UNITARY PACKAGING VOLUME 0	PACKAGING WIDTH 76	PACKAGING NET WEIGHT 0.1
UNITARY PACKAGING GROSS WEIGHT 0.1	PACKAGING LENGTH 76	PACKAGING WEIGHT UNIT KGM
PRODUCT NET WEIGHT 0.1		