


Single-pole switch 16AX 230V~ with built-in pilot light white Simon 270

REF. 20000102-090

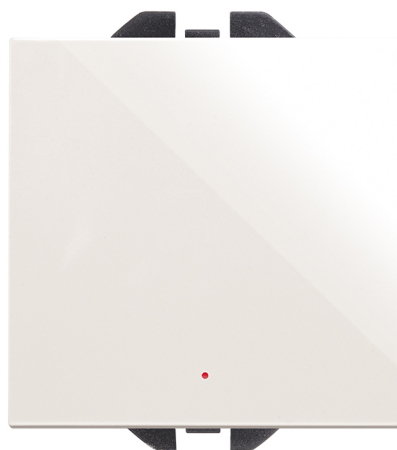

BASIC INFORMATION

FINISH

Gloss white

TYPE OF ROCKER

Large

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 270 frames

PACKAGING CONTENTS

Mechanism, cover and
instruction sheet

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET CE	FREQUENCY 50 - 60 Hz	NOMINAL VOLTAGE (V~) 230 V~
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	INDICATOR FUNCTION Yes	OPERATING TEMPERATURE RANGE (°C) 5 - 45 °C
CONSUMPTION INDICATOR (MA) 1 mA	CURRENT (A) 10 AX	POWER SUPPLY (V~) 230 V~
TYPE OF COVER Large	IP RATING IP20	RAL 9003
NUMBER OF POSSIBLE ELEMENTS 1 element	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	STORAGE TEMPERATURE RANGE (°C) -25 - 75 °C
FORMAT Fast	TYPE OF MECHANISM Pivoting	VOLTAGE (V~) 127/230 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 15	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for flush mounting
	INSTALLATION DIRECTION Horizontal, Vertical	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2013

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053287149

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053287156

PACKAGING VOLUME

0.713

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

5

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

47.75

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

57

PACKAGING NET WEIGHT

0.16

UNITARY PACKAGING GROSS
WEIGHT

0.032

PACKAGING LENGTH

262

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.032

