French double socket outlet 16A 250V~ with safety device and 1Click® terminal connection red Simon 500 Cima

REF. **50000468-037**



BASIC INFORMATION

DESCRIPTION

Double French socket outlet with safety device and 1Click ® terminal connection, finished in graphite colour and belonging to the Simon 500 Cima series. It works with a voltage of 250V and current of 16 A and is a socket outlet suitable both for surface and flush mounting. This socket outlet supports a cable section of 1.5 to 2.5 mm and does not require wire stripping. It works in places with temperatures of -25... 60 °C, although it can withstand extreme temperatures. Manufactured with metal components with self-extinguishing, halogen-free thermoplastic insulation, which are materials that guarantees no flame spread (in case of fire) and low toxicity (in the event of smoke). Also, it complies with regulations UNE-EN 60998-2-3 + NF C-61314:2008 + A1:2010. It measures 100 x 50 mm, with a depth of 46 mm, and can be cleaned with just a soft, dry cloth.

FINISH

Red

COMPATIBILITY

Simon 500 Cima enclosures

PACKAGING CONTENTS

Double socket outlet with cover and installation manual

ETIM CLASS

EC000125

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF CONNECTIONS PER TERMINAL
1 terminal connection for click terminal connection system and 2 terminal connections for screw terminal connection system

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

FORMAT
French

HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

INDICATOR FUNCTION
No

INSULATION RESISTANCE (V-MΩ)
>5MOhms at 500V

CURRENT (A)
16 A

IP RATING
IP20

LINKABLE
Yes, using accessory 50000996-039

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 to 60 °C

TYPE OF MECHANISM
Insertion

NUMBER OF MODULES
2

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

RAL
3002

NUMBER OF SOCKETS
2

VERSION
Double

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
0

REMOVAL OF COVER
Only with tool

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-10-2)

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE SOCKET
Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1
1 click connection (1 click®)

NUMBER OF TERMINALS
3 inputs and 3 outputs

REGULATIONS

REGULATIONS

Dir. 2011/65/UE RoHS + post. mod.|EN IEC 63000:2018|IEC 60884-1 Ed. 3.2|UNE 20315-1-1:2017|UNE 20315-1-2:2017|DS 60884-2-D1:2023

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.111

PRODUCT NET WEIGHT
0.111

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053112755

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
112

PACKAGING WIDTH
117

PACKAGING LENGTH
269

PACKAGING MEASUREMENT UNIT
MMT

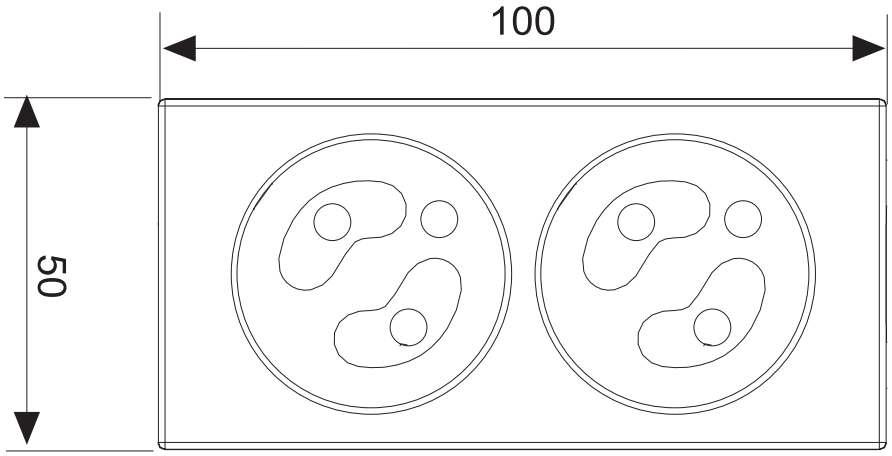
PACKAGING VOLUME
3.525

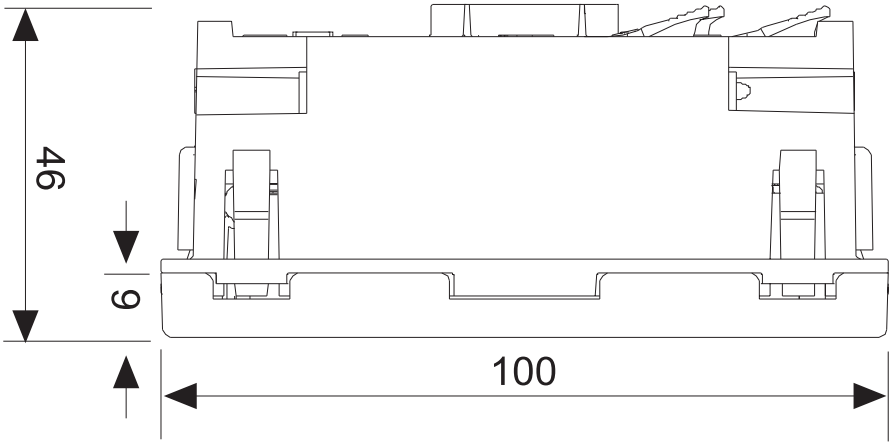
PACKAGING VOLUME UNIT
DMQ

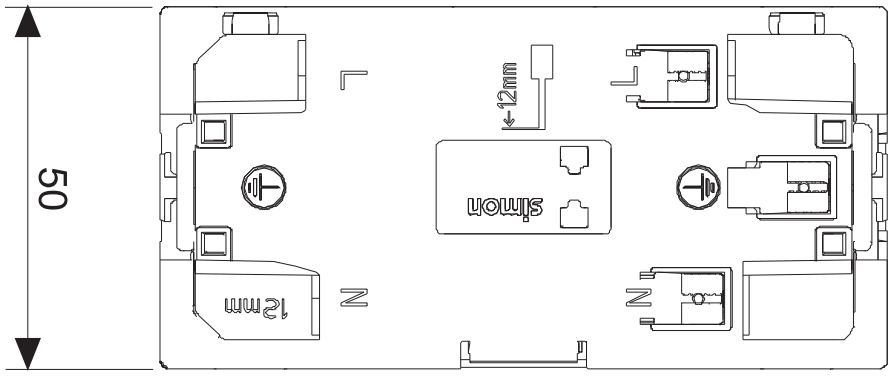
PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.11

PACKAGING WEIGHT UNIT
KGM


100
50


46
9
100


50
12mm
simon
12mm
N
N