


Rocker with viewer for switch with pilot light for 1 element aluminium Simon K45

REF. K115/8

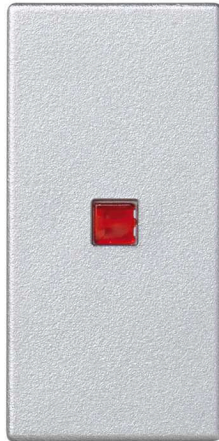

BASIC INFORMATION

DESCRIPTION

With a size of 45 x 22.5 mm and 10 mm depth, the rocker with viewer and 2-way switch with pilot light for 1 element of the Simon K45 collection, it provides security, functionality and a modern design, suitable for all types of spaces. Manufactured with halogen-free thermoplastic, prevents the flame spread and toxicity by smoke, in case of fire and allows the set to reach temperatures of more than 60 °C. Designed for flush mounted or surface-mounted installation, it adapts to all kinds of decorative spaces and environments, adapting to the needs technical and aesthetics of the room. Also, and for greater versatility of the product, it is available in quarter and half module versions. Functionality, innovation and design within the range of rockers with viewer for 2-way switches of the Simon K45 collection.

FINISH

Aluminium

MATERIAL

Plastic

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-033)

PACKAGING CONTENTS

Rocker and installation manual

ETIM CLASS

EC000011

REMARKS

It is not possible to combine 2 narrow button control mechanisms on a Simon 500 Cima-Simon K45 adapter plate

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

AVAILABLE IN

Quarter and half module versions

KIT AVAILABILITY

No

NUMBER OF MODULES

Four

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Single

INDICATOR FUNCTION

Yes

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

Fixing by direct snap-fit, no tools needed

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-033)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.045

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING VOLUME

544320

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436047181

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

544320

UNITS CONTAINED PACKAGING

5

PACKAGING GROSS WEIGHT

0.225

UNITARY PACKAGING VOLUME

UNIT

MMQ

PACKAGING HEIGHT

72

PACKAGING NET WEIGHT

0.225

UNITARY PACKAGING GROSS

WEIGHT

0.045

PACKAGING WIDTH

72

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

105