


**Two-pole switch 16AX 250V~ with indicator light function
and Faston/welding terminal connection system with plate
black Simon K45**

REF. KL04/14

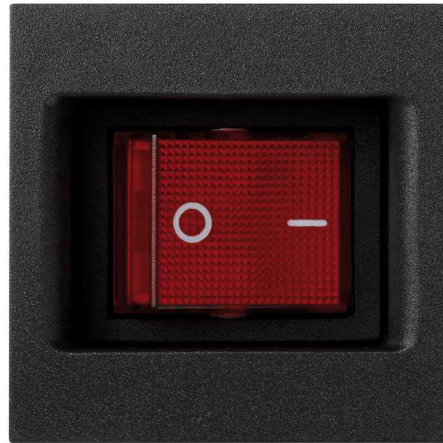

BASIC INFORMATION

DESCRIPTION

The series Simon K45 included in it all kinds of products designed to the interconnectivity in work environments or offices. This is why it needs specific switches, as this double-pole switch (the code of reference is the KL04 / 14) with indicator light function, so it includes an engraving of switching on - OFF. Finished in superb black, it has a Faston/welding terminal system. It is manufactured with the best and safest metal and halogen-free components. Also thermoplastic trim. Maximum durability and the maximum protection for years. Compatible with elements up to 16 Ampere current and 250 Volt voltage. With 1 element and 2 modules and with regard to your application in the wall, is suitable for surface or flush mounting, to clean, do so, simply use a soft, dry cloth. Finally, the user must be taken into account that the article includes the trim plate.

FINISH

Black

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Mechanism with plate, black and blue cabling, faston and instructions

ETIM CLASS

EC001590

REMARKS

The article includes the trim plate.

TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 16 AX	NOMINAL VOLTAGE (V~) 250 V~
CABLE SECTION ADMITTED (MM) Up to 1,5 mm	IP RATING IP20	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CONSUMPTION INDICATOR (MA) 0.5 W/h	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	RAL 7021
NUMBER OF POSSIBLE ELEMENTS 1 item	TYPE OF MECHANISM Tilting	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
INDICATOR FUNCTION Yes		VERSION Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 11	INSTALLATION DIRECTION Vertical according to the direction of the mechanisms	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Faston - Solder
INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)	INSTALLATION TYPE Suitable for surface and flush mounting	

REGULATIONS

REGULATIONS

EN 60669-1:1999+A1:2002+A2:2008 + EN 50581:2012

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.037

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING VOLUME

1472064

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436034518

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0.3

UNITS CONTAINED PACKAGING

10

PACKAGING GROSS WEIGHT

0.37

UNITARY PACKAGING VOLUME
UNIT

MMQ

PACKAGING HEIGHT

88

PACKAGING NET WEIGHT

0.37

UNITARY PACKAGING GROSS
WEIGHT

0.037

PACKAGING WIDTH

123

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

136