


Push-button switch 10A 250V~ with built in light and fast terminal connection Simon 28

REF. 26160-39

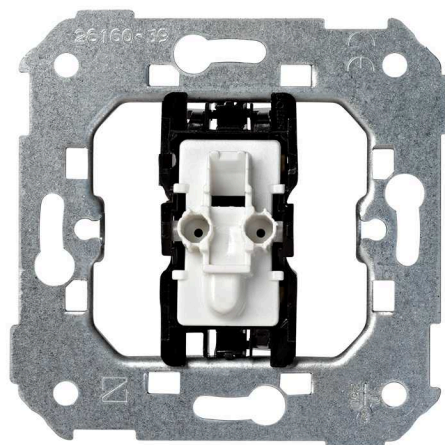

BASIC INFORMATION

DESCRIPTION

This control mechanism is part of the series of Simon products 28. It is a push-button switch for devices with current up to 10A of intensity and 250 volts. Stands out for its simple quick terminal connection system. The push-button switch has a luminous indicator light that gives a touch to the mechanism modern and modern, but the Simon products offer great versatility. In this sense, if you want to replace the indicator light can be done combined with the product with reference number 31802-31. The operation of the push-button switch is extremely simple and so tilting. So, it is a highly interactive and user-friendly for the user. Simon is characterized by its high quality products. This is achieved using in its manufacturing the best materials of the market. In this case, the push-button switch is made of metal components with halogen-free thermoplastic insulation. These materials give it great resistance to high and low temperatures, so that the product continues to operate optimally. It is also capable of withstanding challenges external and scratches and knocks.

MATERIAL

Thermoplastic

PACKAGING CONTENTS

Mechanism and instructions

COMPATIBILITY

Simon 28 frames

ETIM CLASS

EC000029

REMARKS

Can be combined with article 31802-31 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 A

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

TYPE OF MECHANISM

Pivoting

VERSION

Single

NUMBER OF POSSIBLE ELEMENTS

1 element

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

VOLTAGE (V~)

250 V~

INDICATOR FUNCTION

Yes

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

15

INSTALLATION TYPE

Suitable for surface and flush mounting

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.052

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

3017190

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8421053015322

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

3017190

UNITS CONTAINED PACKAGING

10

PACKAGING GROSS WEIGHT

0.515

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING HEIGHT

82

PACKAGING NET WEIGHT

0.52

UNITARY PACKAGING GROSS WEIGHT

0.052

PACKAGING WIDTH

165

PACKAGING WEIGHT UNIT


KGM

PACKAGING LENGTH


223

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interrupor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

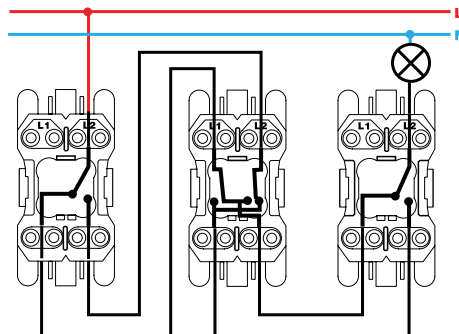


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches




Interrupor unipolar / Single-pole switch
XX00102-XX




Interrupor bipolar / Double pole switch
XX00134-XX

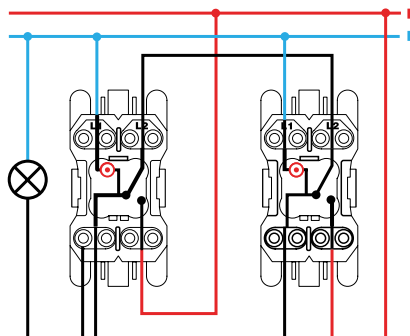


Conmutador / 2-way switch
XX00202-XX




Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

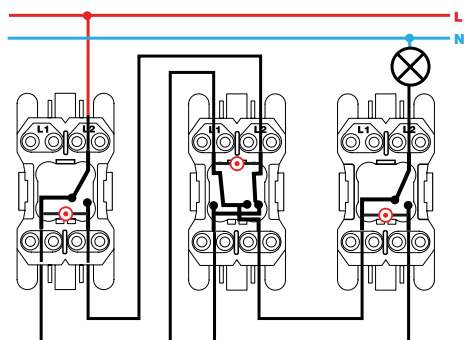

Conmutador cruce / Intermediate switch
XX2700254-XX