


2-way rotary switch 16A 250V~ with 4 positions

REF. 75233-39

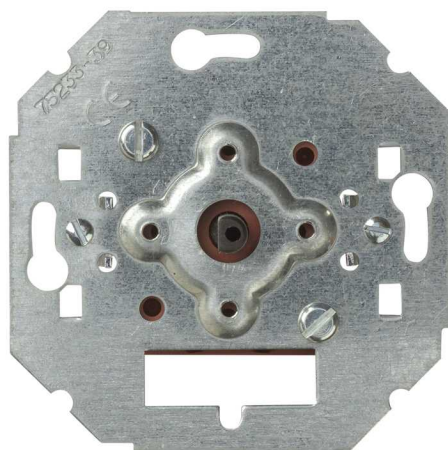

BASIC INFORMATION

DESCRIPTION

Controls the electrical system through the rotary switch of the Simon 75 collection. Aunando/Aunando design and technology, this range of 2-way switches are converted into the perfect complement to achieve a few finishes that balance maximum functionality in a design of clean lines and minimalist style. With a mechanism that includes the stop position and 3 more typefaces, it is ideal for ceiling fans, although its functionalities can spread to all types of electrical mechanisms. To protect the room in case of fire, its components are isolated with halogen-free thermoplastic. With the versatility of being able to be installed both flush-mounted as on the surface-mounted, the rotary switch of the Simon 75 is compatible with a voltage of power of 250 Volt and 10 Ampere current, allowing it wire cross-section of 0.5 mm Design adapted to the new decorative trends and the guarantee of the top innovation and functionality within this rotary switch Simon 75.

COMPATIBILITY

Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 and Simon 88 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

Mechanism equipped with stop position and 3 other positions (ideal for ceiling fans)

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

No

NOMINAL VOLTAGE (V~)

250 V~

CABLE SECTION ADMITTED (MM)

0,5 mm

CURRENT (A)

16 A

OPERATING TEMPERATURE

RANGE (°C)

5 - 40 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

IP RATING

IP20

STORAGE TEMPERATURE RANGE

(°C)

-25 - 50 °C

NUMBER OF FUNCTIONAL POSITIONS

4

TYPE OF MECHANISM

Rotary

VERSION

Single

INSTALLATION AND MAINTENANCE

CLAW

Included

INSTALLATION TYPE

Suitable for surface and flush
mounting

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

Welding

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN IEC 61058-1:2018 | EN 61058-2-5:2011 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255902

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

3409560

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.082

PRODUCT NET WEIGHT

0.082

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053024201

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

82

PACKAGING WIDTH

165

PACKAGING LENGTH

252

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3409560

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.82

PACKAGING NET WEIGHT

0.82

PACKAGING WEIGHT UNIT

KGM