


IP66 mechanism holder unit with safety lock and a Italian socket P40 socket with 1RJ45 category 6 UTP stainless steel Simon K45

REF. KSE36USEC/23/72

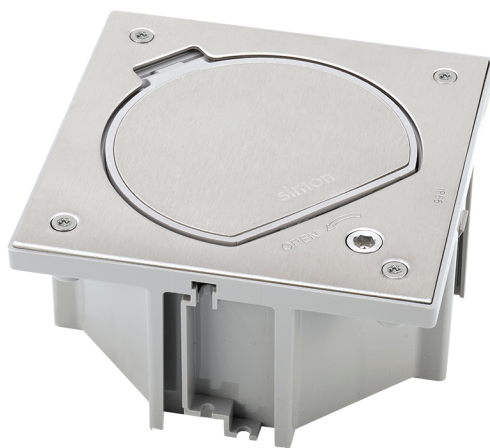

BASIC INFORMATION

DESCRIPTION

With the range update, its equivalent for the new version is the KFH116USEC/72 reference.

FINISH

Stainless steel

MATERIAL

Stainless steel

ETIM CLASS

EC000024

REMARKS

The cover includes anchors that protect the connections during use from pressure and stress caused by foot traffic. Since the end of March 2023, Allen screws have been replaced with Torx screws to reduce the effort required for tightening, minimize the noise generated by the expansion of the insert, and prevent potential deformation of the screw head during product maintenance.

TECHNICAL INFORMATION

DUST SHUTTER

No

CURRENT (A)

16 A

RECESS DIMENSION (MM)

145 x 145 mm en suelo técnico

FORMAT

Italian

IP RATING

IP66

VOLTAGE (V~)

250 V~

INDICATOR FUNCTION

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

12

NUMBER OF COVER OPENING POSITIONS

1

EXTINGUISHING (°C)

+650 °C (according to standard IEC 60670)

CAN BE INSTALLED IN TRAY

Plastic

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053333938

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.47

PRODUCT NET WEIGHT

0.396

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053333938

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

82

PACKAGING WIDTH

147

PACKAGING LENGTH

155

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1664000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.47

PACKAGING NET WEIGHT

0.396

PACKAGING WEIGHT UNIT

KGM