Flat voice and data plate without dust cover for 2 RJ45 3M® for 1 element graphite Simon 500 Cima

REF. **50011189-038**



BASIC INFORMATION

DESCRIPTION

If you are looking for a plate that includes clips for fastening in vertical and horizontal enclosures without the need for an adaptor, the best choice is the Plate for voice and data plate without dust cover for 2 RJ45 3M for one element in graphite colour of the Simon 500 Cima series. A multitude of public and private buildings, such as educational centres, hotels, hospitals, sports facilities or headquarters of offices, already enjoy the advantages that provides this accessory. With dimensions of 50 x 50 x 11 mm, the qualities of its structure, it is one of the safest on the market, is one of the reasons for this feature is given by the halogen-free thermoplastic material with which it has been designed, a material that guarantees no flame propagation in case of fire and the low toxicity in case of smoke and whose easy cleaning allows you to maintain its structure as the first day.

FINISH

Graphite

PACKAGING CONTENTS

Flat voice and data plate without dust cover

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

COMPATIBLE WITH CONNECTORS
Volition OCK®, RJ25, K5e and K6 from 3M®.

RJ45 CONNECTORS
Not included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

DUST PROTECTION
No

FORMAT
RJ45

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
1

PLATE TYPE
Flat

RAL
7021

RJ45 ADAPTOR MODULE
Included in voice and data plate

SNAP-FIT RJ45 PLATES
RJ45 3M® connectors

SNAP-FIT TYPE
RJ45 3M® connectors

VERSION
Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS
Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.015

PRODUCT NET WEIGHT
0.015

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053096710

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
54

PACKAGING WIDTH
52

PACKAGING LENGTH
215

PACKAGING MEASUREMENT UNIT
MMT

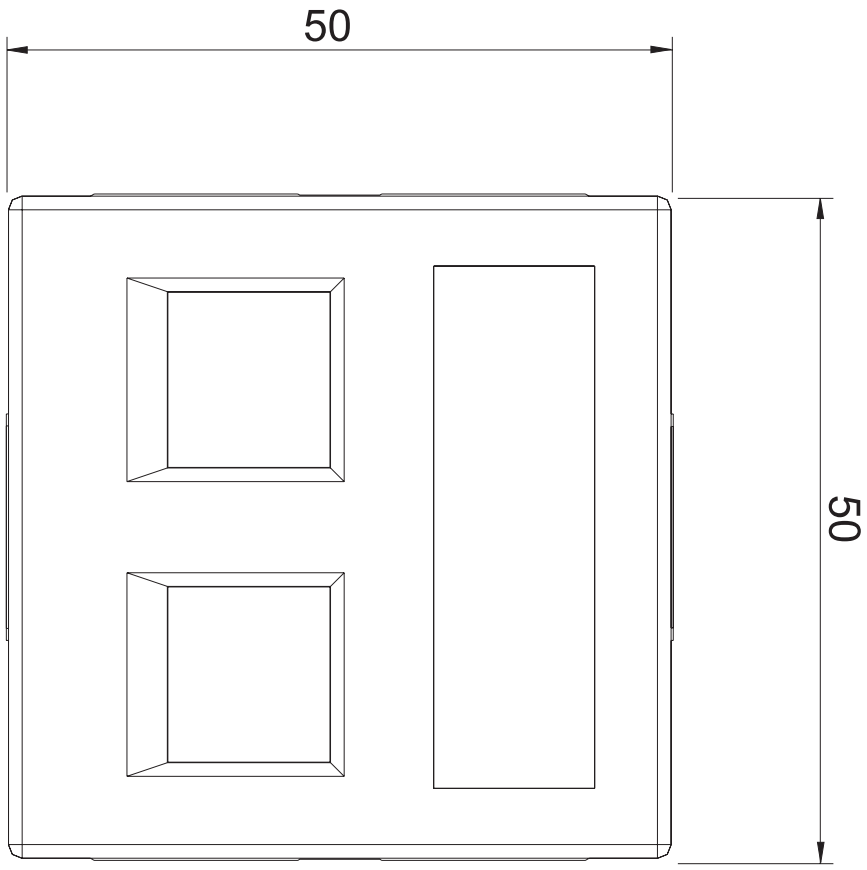
PACKAGING VOLUME
0.604

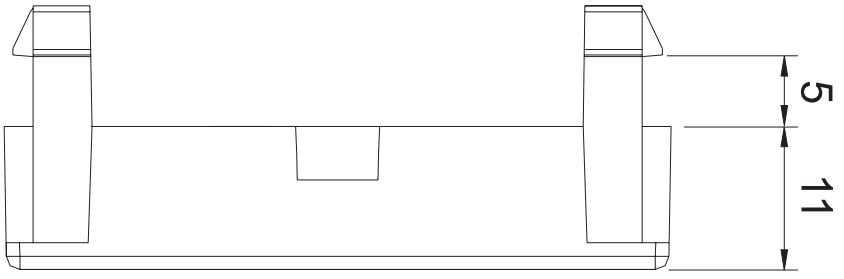
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0.155

PACKAGING NET WEIGHT
0.15

PACKAGING WEIGHT UNIT
KGM


50
50


5
11