Push-button switch with light symbol 10A 250V~, built-in light indicator and fast terminal connection system ivory Simon 27 Play

REF. **27161-62**



BASIC INFORMATION

DESCRIPTION

To get the maximum functionality in its electrical mechanisms, Simon 27 Play offers the tilting push-button switch with signalling function integrated. With finishes in a discreet and stylish ivory colour, the Simon 27 Play collection combines design, functionality and innovation in this push-button switch with engraved light and quick terminal connection system. Compatible with power supplies of 250 Volt and 10 Amps, has a 0.55 mA only in the system signing. Consists of 2 modules for one element, with a size of 45 x 45 mm and a cable section cross-section of 1.5 to 2.5 mm and stripping of 11 mm Made of metal materials with halogen-free thermoplastic isolated and thermo-stable trim, it protects the room of the flame spread and smoke poison in case of fire. Designed for installation both recessed and surface-mounted, increasing the versatility of the set to adapt to the needs of each room aesthetic and functional.

FINISH

Ivory

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC000029

REMARKS

Can be combined with article 2700802-064 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)

0.55 mA

NUMBER OF POSSIBLE ELEMENTS

1 element

INDICATOR FUNCTION

Yes

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Pivoting

NOMINAL VOLTAGE (V~)

250 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American and Centralisations

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053251713

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.032

PRODUCT NET WEIGHT
0.032

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053035870

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
53

PACKAGING WIDTH
105

PACKAGING LENGTH
221

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1229865

PACKAGING VOLUME UNIT
MMQ


PACKAGING GROSS WEIGHT
0.32

PACKAGING NET WEIGHT
0.32


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interruptor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interruptor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

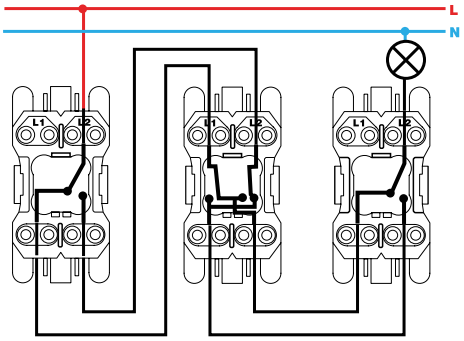


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches



Interruptor unipolar / Single-pole switch
XX00102-XX




Interruptor bipolar / Double pole switch
XX00134-XX

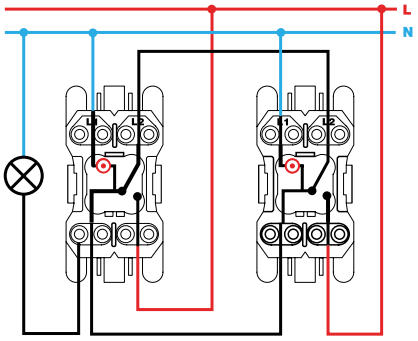


Conmutador / 2-way switch
XX00202-XX


Mecanismos con luminoso / Switches with light




Interruptor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

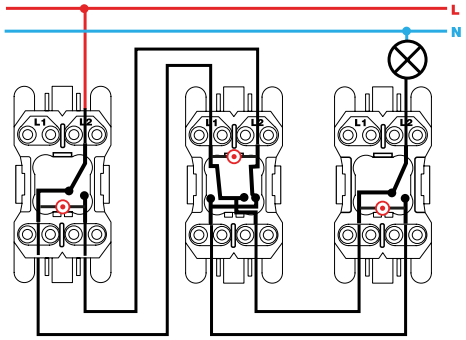

Conmutador cruce / Intermediate switch
XX2700254-XX