


**Mechanism-holder unit IP66 with manual lock and Italian
socket P40 socket outlet for 1 Keystone RJ45 connector
stainless steel Simon K45**

REF. KSE30U/23/72

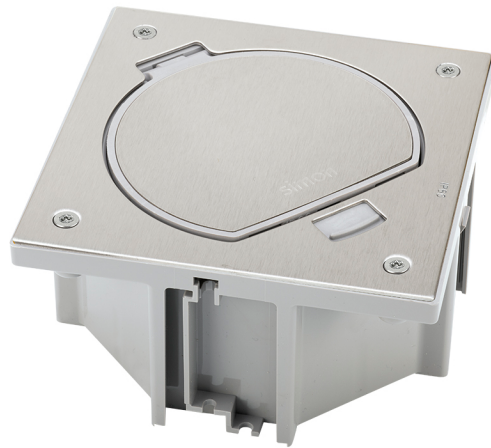

BASIC INFORMATION

DESCRIPTION

Mechanism-holder unit IP66 in stainless steel of the Simon K45 series. With manual closure and Italian P40 socket outlet for a Keystone I and II RJ45 connector. It measures 130 x 130 x 55 mm and has a voltage of 250V and a power of 16. It also has a socket for standard current circuit. It has anchor points so that the connections are protected during pressures and stresses due to the passage of people. It is made of AISI 304 stainless steel on a self-extinguishing thermoplastic baseboard and halogen-free, self-extinguishing thermoplastic baseboard, which prevents flame spread and high toxicity in case of fire and has been designed according to the regulation UNE-EN 60.670-23. It can be installed in raised floor or concrete floor, and its cleaning is simple, as you only need to use a soft, dry cloth, since the abrasive cleaners with chlorine may damage the unit. With the range update, its equivalent for the new version is the KFH111/72 reference.

FINISH

Stainless steel

MATERIAL

Stainless steel

ETIM CLASS

EC000024

REMARKS

The cover has anchor points that protect the connections during use against pressures and stresses due to the passage of personnel.

TECHNICAL INFORMATION

NUMBER OF CONNECTORS

1

INDICATOR FUNCTION

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

DUST SHUTTER

No

CURRENT (A)

16 A

FORMAT

Italian

IP RATING

IP66

RECESS DIMENSION (MM)

145 x 145 mm en suelo técnico

IK CLASSIFICATION

07

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

12

REMOVAL OF COMPONENTS

Only with tool

NUMBER OF COVER OPENING POSITIONS

1

REMOVAL OF COVER

Only with tool

EXTINGUISHING (°C)

+650 °C (according to standard IEC 60670)

REMOVAL OF THE FRAME

Only with tool

CAN BE INSTALLED IN TRAY

Plastic

REMOVAL OF THE SOCKET

Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053333853

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.438

PRODUCT NET WEIGHT

0.364

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053333853

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

82

PACKAGING WIDTH

147

PACKAGING LENGTH

155

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1032295

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.438

PACKAGING NET WEIGHT

0.364

PACKAGING WEIGHT UNIT

KGM