Cover for mechanism of the German double socket outlet red Simon 500 Cima

REF. **50001841-037**



BASIC INFORMATION

DESCRIPTION

Red cover for double Schuko socket from the Simon 500 Cima range. This socket cover has 2 elements and 2 modules and must be combined with a double Schuko socket. It measures 100x50x9 mm and it is manufactured in halogen-free thermoplastic, guaranteeing no flame spread in case of fire and low toxicity in case of smoke. It is a socket cover suitable for surface or flush mounting installation in rooms with temperatures of between -5 and 60 ° C, although it can withstand the 90 ° C if flush-mounted on the wall. It can be cleaned with just a soft, dry cloth. Never use any kind of abrasive cloths and / or cleaners that contain any amount of chlorine in their formula. It has been designed according to the regulations UNE 20315 and EN 60.998-2-3.

FINISH

Red

MATERIAL

Plastic

COMPATIBILITY

German double socket outlets Simon 500 Cima

PACKAGING CONTENTS

Cover for mechanism of the German double socket outlet without viewer or LED light indicator

ETIM CLASS

EC000011

REMARKS

Must be combined with a German double socket outlet

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
Plate with viewer and LED light indicator, plate without viewer and as a replacement for plate with viewer

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C in surface-mount wall installation and +90 °C in flush-mount wall installation

FORMAT
Schuko

INDICATOR FUNCTION
No

IP RATING
IP20

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
2

RAL
3002

VERSION
2 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER
Only with tool

TYPE OF FASTENING
By direct snap-fit on the double socket outlet (no tools needed for fastening))

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface or flush-mount installation

REGULATIONS

REGULATIONS
Dir. 2011/65/UE RoHS + post. mod.|EN IEC 63000:2018|IEC 60884-1 Ed. 3.2|UNE 20315-1-1:2017|UNE 20315-1-2:2017|DS 60884-2-D1:2023

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.025

PRODUCT NET WEIGHT
0.025

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053093603

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
52

PACKAGING WIDTH
105

PACKAGING LENGTH
220

PACKAGING MEASUREMENT UNIT
MMT

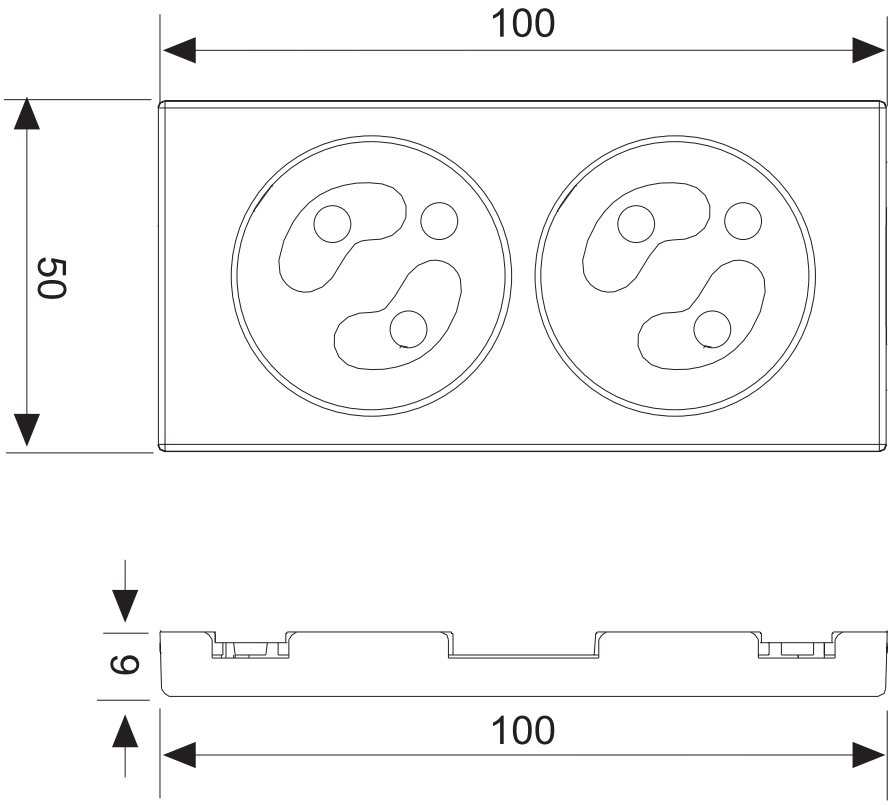
PACKAGING VOLUME
1.201

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.25

PACKAGING WEIGHT UNIT
KGM


100
50
9
100