


Double USB charger A+C 30W Power Delivery aluminium Simon 270

REF. 20000296-093

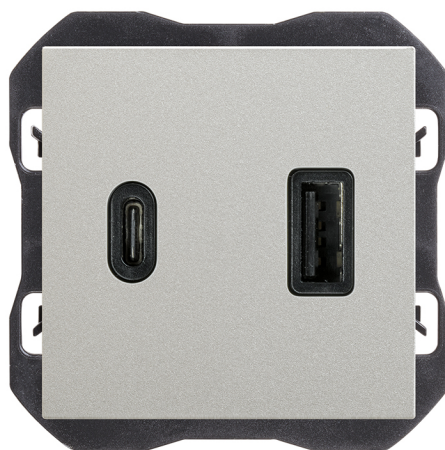

BASIC INFORMATION

DESCRIPTION

Double USB charger A+C 30W Power Delivery from the Simon 270 series, with two fast-charging ports for mobile devices. Made of thermoplastic, it measures 45 x 45 mm. Suitable for flush mounting in a universal back box, in a vertical or horizontal position. Protection rating IP20. Operating temperature range: 5 to 45 °C. Storage temperature range: -25 to 50 °C. Clean with a soft cloth lightly dampened with soapy water, avoiding abrasive or chlorine-based cleaners. Up to 9 available finish colours: 090 Glossy White; 190 Matte White; 091 Copper; 093 Aluminium; 094 Champagne; 095 Gold; 096 Titanium; 097 Bronze; 098 Matte Black.

FINISH

Matt aluminium

MATERIAL

Thermoplastic

PACKAGING CONTENTS

Mechanism, cover and instruction sheet

SYMBOL

PD

COMPATIBILITY

Simon 270 frames

ETIM CLASS

EC002949

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CONNECTOR TYPE

USB A + USB C

NUMBER OF POSSIBLE ELEMENTS

1 element

FORMAT

USB

FREQUENCY

50 - 60 Hz

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Insertion

MONOBLOCK

No

NOMINAL VOLTAGE (V~)

230 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 45 °C

POWER SUPPLY (V~)

127/230 V~

RAL

9006

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

USB CHARACTERISTICS

USB-A: 5,0 VDC 3,0 A 15W | USB-C: 5,0 VDC 3,0 A 15W, 9,0 VDC 3,0 A 27W, 12,0 VDC 2,5 A 30W, 15,0 VDC 2,0 A 30W, 20,0 VDC 1,5 A 30W

USB MAXIMUM POWER (W)

30

USB CURRENT (A)

3.0 A

USB PORT TYPE

A,C

POWER DELIVERY USB

Yes

VOLTAGE (V~)

127/230 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION DIRECTION

Horizontal, Vertical

INSTALLATION TYPE

Suitable for flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2009/125/EC ErP (Reg. UE 2019/1782) | Dir. 2011/65/UE RoHS + post. mod | EN 50563:2011 + A1:2013 | EN IEC 61000-3-2:2019 + A1:2021 + A2:2024 | EN IEC 62368-1:2020 + A11:2020 | EN 61000-3-3:2013 + A1:2019 + A2:2021 | EN IEC 63000:2018 | EN IEC 61000-6-1:2019 | EN IEC 61000-6-3:2021

LOGISTICS INFORMATION

UNITARY EAN CODE	UNITARY PACKAGING WEIGHT UNIT	PACKAGING MEASUREMENT UNIT
8421053277355	KGM	MMT
UNITARY PACKAGING HEIGHT	PACKAGING EAN	PACKAGING VOLUME
0	8421053277355	242000
UNITARY PACKAGING WIDTH	UNITS CONTAINED PACKAGING	PACKAGING VOLUME UNIT
0	1	MMQ
UNITARY PACKAGING LENGTH	PACKAGING HEIGHT	PACKAGING GROSS WEIGHT
0	80	0
UNITARY PACKAGING VOLUME	PACKAGING WIDTH	PACKAGING NET WEIGHT
0	55	0.062
UNITARY PACKAGING GROSS WEIGHT	PACKAGING LENGTH	PACKAGING WEIGHT UNIT
0.062	55	KGM
PRODUCT NET WEIGHT		
0.062		

