Aluminium mini column with 2 sides for 8 elements per side and trims graphite Simon 500 Cima

REF. **52550224-033**



BASIC INFORMATION

DESCRIPTION

Innovation, versatility and functionality in its work area with the Simon 500 Cima. Made in Anodised aluminium mini column, this has 2 sides for 8 elements each and trim cover finishes in Graphite, guarantee maximum functionality in the minimum space. Suitable to be installed both in raised floor and concrete floor, the mini-column 500 Cima is easy assembly using screws, with a way to baseboard that allows the optimum integration with the floor trunking dimension 85 x 18 mm and that contains also a rail for fastening the frame-holder. In this way, the range 500 Cima, which minimizes the installation time, making the same and adapting to the needs both technical and aesthetics of each space. Maximum workplace solutions in reduced spaces as a hallmark of the range of Simon 500 Cima MINI-COLUMNS

FINISH

Aluminium

MATERIAL

Aluminium

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

PACKAGING CONTENTS

Mini column, baseboard, lower and upper trim, non-slip adhesive foam, fixing studs, ground connection cable, screws and installation manual

ETIM CLASS

EC001941

REMARKS

The shape of the baseboard allows integration of the mini column with the 85 x 18 mm floor trunking

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
1 and 2 sides

MAX TEMP DURING CONSTRUCTION WORK (°C)
+120 °C

EARTHING RESISTANCE
< 0.05 Ohms

ELECTRICAL PROPERTIES
With electrical continuity

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Constant clearance between electric wiring and Voice, Data and Multimedia cables, eliminating electromagnetic interference and possible transmission errors.

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 to +120 °C

NUMBER OF MODULES
8 per side

VERSION
2 sides

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

SCREWS REQUIRED FOR FLOOR FIXING
4

REMOVAL OF TRIM FRAMES
Only with tool

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053094495

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
2.845

PRODUCT NET WEIGHT
2.845

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053094495

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
85

PACKAGING WIDTH
128

PACKAGING LENGTH
1137

PACKAGING MEASUREMENT UNIT
MMT

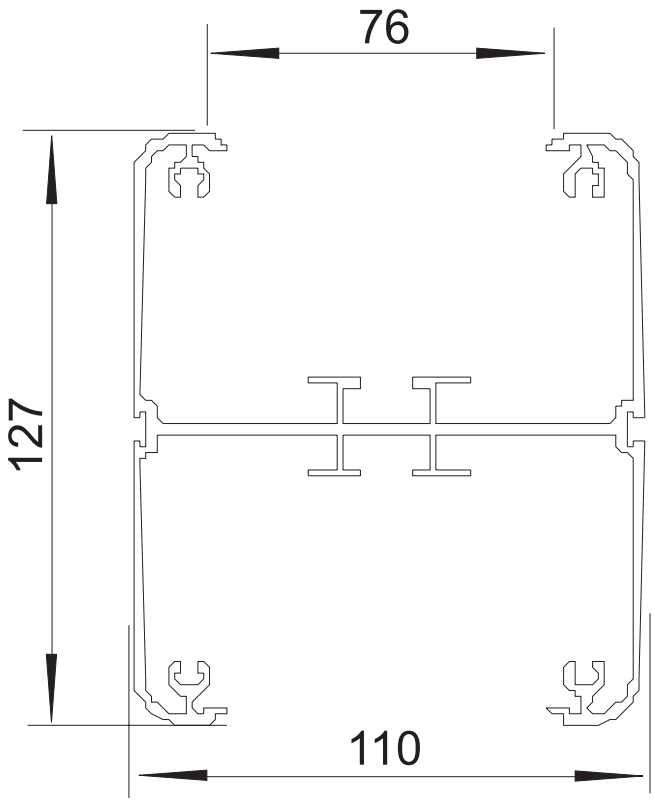
PACKAGING VOLUME
12370560

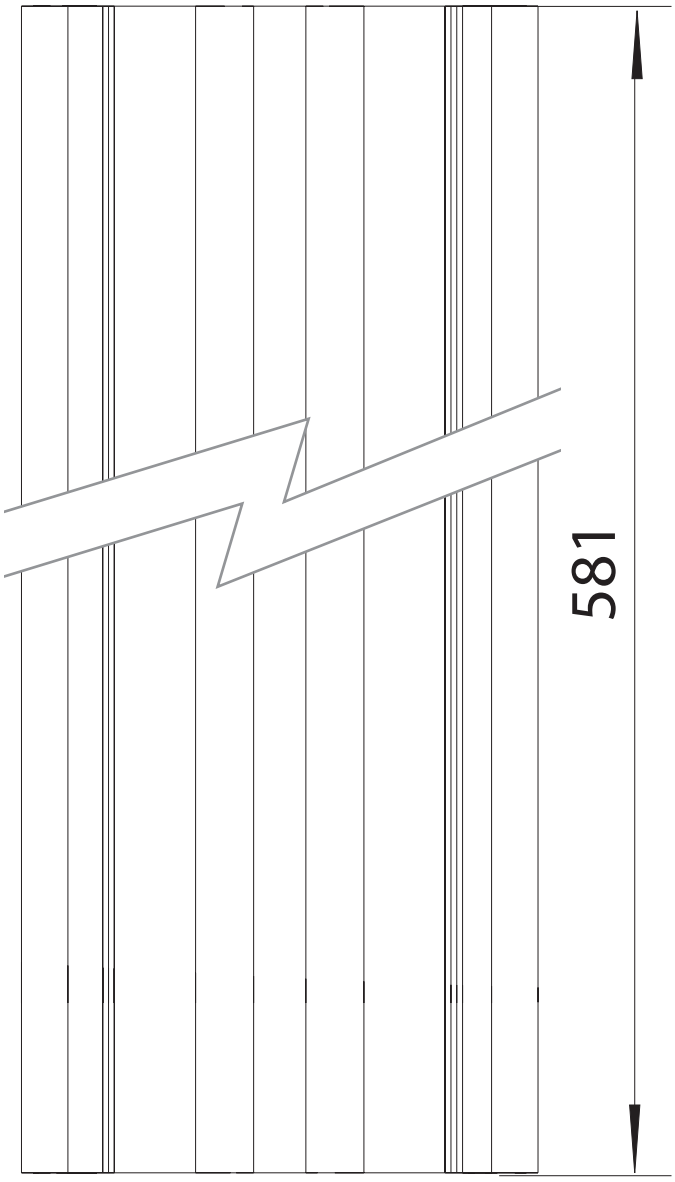
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
2.845

PACKAGING WEIGHT UNIT
KGM


76
127
110


581