

## Single-pole switch 10AX 250V~ for half element with fast terminal connection system ivory Simon 27 Play

REF. 27101-61



## BASIC INFORMATION

### DESCRIPTION

The classic elegance of avant-garde finishes in ivory, are linked to the innovation and functionality of the single-pole switch half element of the Simon 27 Play collection. Its neutral lines design and clean and its size 22.5 x 45 mm, ensure the integration of the set in spaces modern environments functional. With quick terminal connection and installation suitable for recessed or surface-mounted, the tilting switch Simon 27 Play is compatible with a voltage of power of 250 Volts and 10 AX intensity. It also supports a cable section of 1.5 to 2.5 mm and stripping of 11 mm wire Made of metal materials with halogen-free thermoplastic isolated, includes a thermo-stable trim for greater security against fire to prevent the flame spread and toxicity by smoke. Compatible with the most common frames of Simon, allows you to replace the finish of the rocker for any of the five additional finishes available.

### FINISH

Ivory

### COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

### PACKAGING CONTENTS

Mechanism with rocker

### ETIM CLASS

EC001590

### REMARKS

Possibility of substituting the finish of the rocker supplied with a different one. 5 additional finishes available.

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### CURRENT (A)

10 AX

### OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

### CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

### IP RATING

IP21

### STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

### NUMBER OF POSSIBLE ELEMENTS

Half element

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### VERSION

Single

### INDICATOR FUNCTION

No

### TYPE OF MECHANISM

Pivoting

### VOLTAGE (V~)

250 V~

## INSTALLATION AND MAINTENANCE

### CABLE STRIPPING NECESSARY (MM)

11

### CLAW

Simon 27

### INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American, Small  
spaces and Centralisations

### INSTALLATION DIRECTION

Horizontal, Vertical

### INSTALLATION TYPE

Suitable for surface and flush  
mounting

### TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

## REGULATIONS

### REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053251416

### UNITARY PACKAGING HEIGHT

22.6

### UNITARY PACKAGING WIDTH

38.1

### UNITARY PACKAGING LENGTH

45.5

### UNITARY PACKAGING MEASUREMENT UNIT

MMT

### UNITARY PACKAGING VOLUME

0.039

### UNITARY PACKAGING VOLUME UNIT

MMQ

### UNITARY PACKAGING GROSS WEIGHT

0.023

### PRODUCT NET WEIGHT

0.018

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING EAN

8421053035467

### UNITS CONTAINED PACKAGING

20

### PACKAGING HEIGHT

53

### PACKAGING WIDTH

105

### PACKAGING LENGTH

220

### PACKAGING MEASUREMENT UNIT

MMT

### PACKAGING VOLUME

1.224

### PACKAGING VOLUME UNIT

DMQ

### PACKAGING GROSS WEIGHT

0.458

### PACKAGING NET WEIGHT


0.36

### PACKAGING WEIGHT UNIT


KGM

# MECANISMOS SIMON 27, 28 Y 44


## Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch  
XX00101-XX




Pulsador / Push button switch  
XX00150-XX



Interrupor bipolar / Double pole switch  
XX00133-XX




Conmutador / 2-way switch  
XX00201-XX

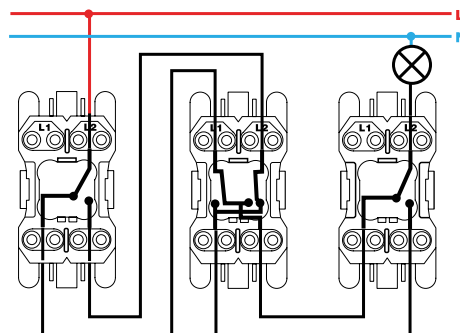


Conmutador cruce / Intermediate switch  
XX00251-XX


## Mecanismos con piloto / Pilot switches




Interrupor unipolar / Single-pole switch  
XX00102-XX




Interrupor bipolar / Double pole switch  
XX00134-XX

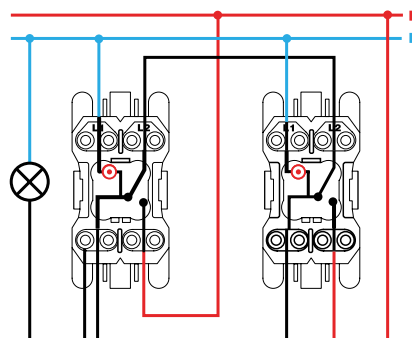


Conmutador / 2-way switch  
XX00202-XX




Interrupor unipolar / Single-pole switch  
XX00104-XX



Pulsador / Push button switch  
XX00160-XX



Conmutador / 2-way switch  
XX2700204-XX

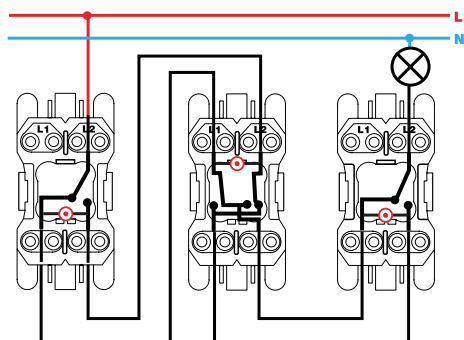

Conmutador cruce / Intermediate switch  
XX2700254-XX