


Trim plate for 2 quick-connection connectors with 3 poles male or female for 1 element black Simon K45

REF. KB18/14

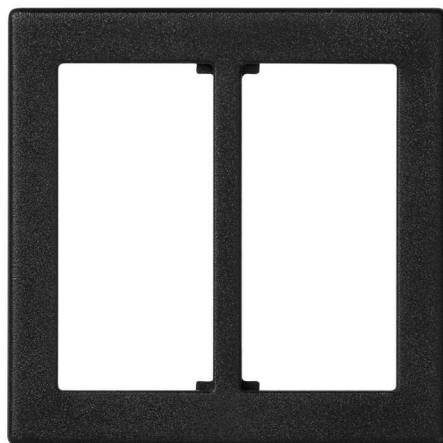

BASIC INFORMATION

DESCRIPTION

Elegance, functionality and innovation in the trim plate of the Simon K45 Collection. With finishes in black, the plate is designed for a quick connection connector, for one 3-pole male or female, 1 element. With a size of 45 x 45 mm and a depth of 8,5mm, Simon K45 ensures maximum functionality of the product, allowing the optimum integration of the set in a reduced space, manufactured with thermoplastic materials self-extinguishing halogen-free, the range Simon prevents the flame spread and toxicity by smoke in case of fire, reaching temperatures between -5°C and 60 ° C The connector must be purchased separately to do not be included in the plate. If you decide to use a quick connection connector another brand, the plate is compatible with the leading manufacturers as Wieland, Wago, etc. For proper fastening, the clips must have thickness of 1.5 or 2 mm

FINISH

Black

MATERIAL

Plastic

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Plate for 2 fast-connection connectors with 3 poles

ETIM CLASS

EC000011

REMARKS

Connectors not included (to be purchased separately). If using another quick connect brand, the plate is compatible with the leading manufacturers (Wieland®, Wago®, etc). To fix the connector to the plate correctly, the clips must be between 1.5 and 2 mm thick.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

Versions for 1 and 2 quick-connection connectors with 3 male or female poles

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

FORMAT

GST18

INDICATOR FUNCTION

No

IP RATING

IP20

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

NUMBER OF MODULES

Half

RAL

7021

VERSION

Double

INSTALLATION AND MAINTENANCE

TYPE OF FASTENING

Fixing by direct snap-fit, no tools needed

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

REMOVAL OF THE PLATE

Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60535:2009 A1:2013

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

PRODUCT NET WEIGHT
0.007

PACKAGING MEASUREMENT
UNIT
MMT

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING VOLUME
911400

UNITARY PACKAGING LENGTH
0

PACKAGING EAN
8426436036758

PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING VOLUME
45570

UNITS CONTAINED PACKAGING
20

PACKAGING GROSS WEIGHT
0.14

UNITARY PACKAGING VOLUME
UNIT
MMQ

PACKAGING HEIGHT
70

PACKAGING NET WEIGHT
0.14

UNITARY PACKAGING GROSS
WEIGHT
0.007

PACKAGING WIDTH
93

PACKAGING WEIGHT UNIT
KGM

PACKAGING LENGTH
140