# Aluminium mini column with 2 sides for 4 elements per side and trims graphite Simon 500 Cima

REF. **52550222-033**



# BASIC INFORMATION

## DESCRIPTION

The Simon 500 Cima series is a leader in the design of accessories fixed to the floor for all types of electrical and electronic systems in the headquarters of companies and private homes, commercial premises. In this range we find the Mini-column in aluminium colour of the two sides for 4 elements per side and trims in graphite finish. This mini pole has dimensions of €304 x 110 mm x 127 One of its great advantages is that the shape of the baseboard allows integration of the mini-column with the floor trunking 85 x 18 mm. This is an element suitable for installing on any floor type, whether raised or concrete. Its structure has been made with anodised aluminium. Thanks to this material we are looking at a piece with great resistance to impacts, knocks in as well as the deterioration that is produced by the high temperatures.

## FINISH

Aluminium

## MATERIAL

Aluminium

## COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

## PACKAGING CONTENTS

Mini column, baseboard, lower and upper trim, non-slip adhesive foam, fixing studs, ground connection cable, screws and installation manual

## ETIM CLASS

EC001941

## REMARKS

The shape of the baseboard allows integration of the mini column with the 85 x 18 mm floor trunking

## TECHNICAL INFORMATION

### AVAILABLE MARKET
CE

### PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

### PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

### AVAILABLE IN
1 and 2 sides

### MAX TEMP DURING CONSTRUCTION WORK (ºC)
+120 ºC

### EARTHING RESISTANCE
< 0.05 Ohms

### ELECTRICAL PROPERTIES
With electrical continuity

### ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Constant clearance between electric wiring and Voice, Data and Multimedia cables, eliminating electromagnetic interference and possible transmission errors.

### IP RATING
IP4X

### KIT AVAILABILITY
No

### MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TEMPERATURE RANGE DURING INSTALLATION (ºC)
-25 to +120 ºC

### NUMBER OF MODULES
4 per side

### VERSION
2 sides

## INSTALLATION AND MAINTENANCE

### REMOVAL OF COMPONENTS
Only with tool

### TYPE OF FASTENING
Using the screws supplied

### INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

### INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

### SCREWS REQUIRED FOR FLOOR FIXING
4

### REMOVAL OF TRIM FRAMES
Only with tool

## REGULATIONS

### REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

## LOGISTICS INFORMATION

UNITARY EAN CODE
8421053094433

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.88

PRODUCT NET WEIGHT
1.88

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053094433

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
124

PACKAGING WIDTH
142

PACKAGING LENGTH
900

PACKAGING MEASUREMENT UNIT
MMT

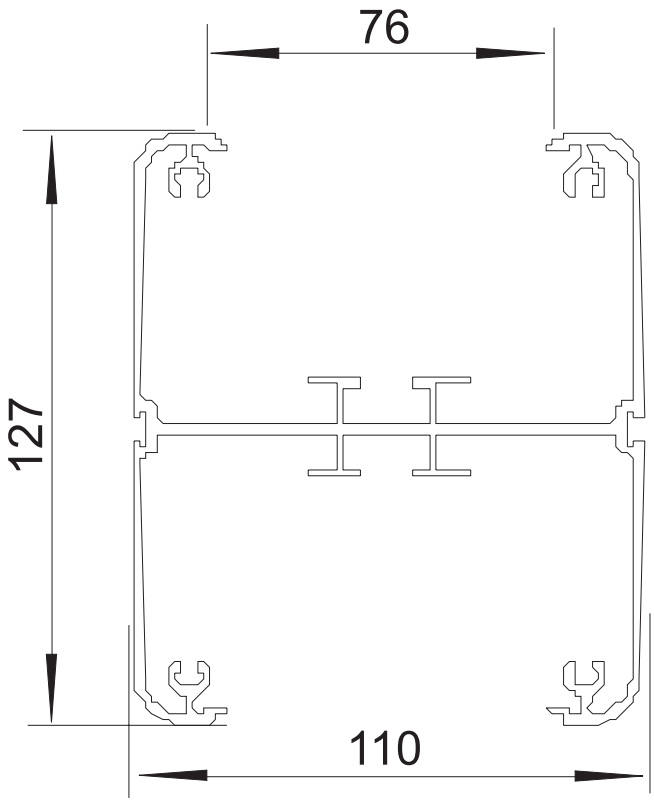
PACKAGING VOLUME
9432960

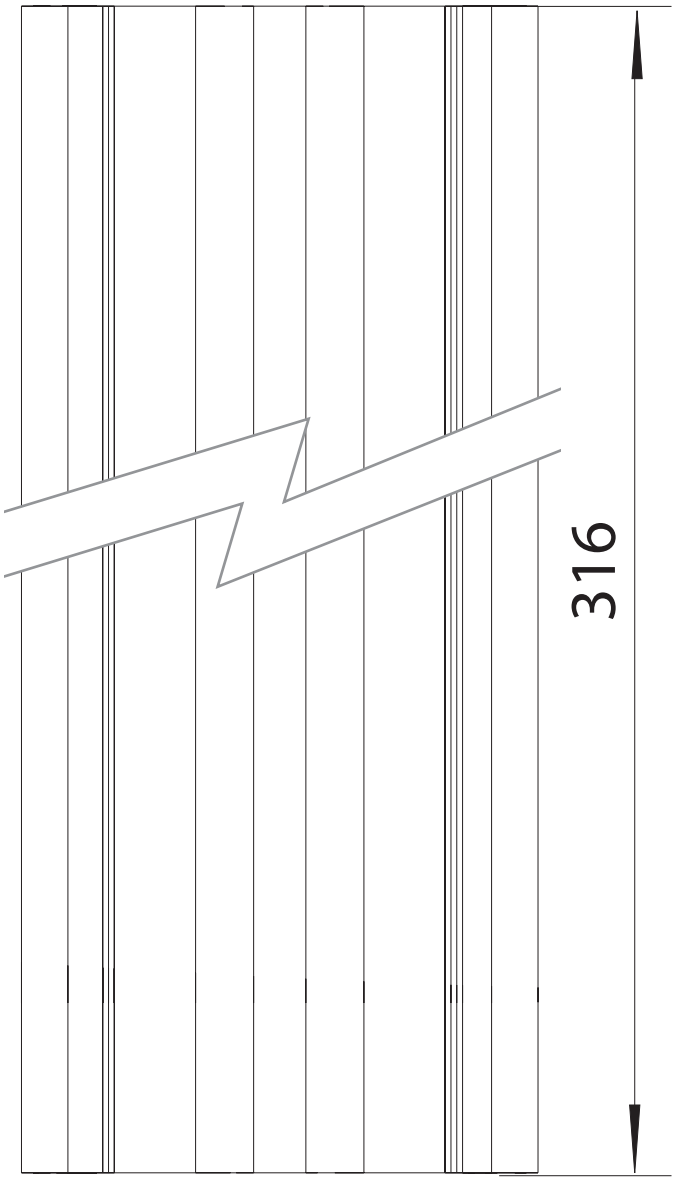
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.88

PACKAGING WEIGHT UNIT
KGM


76
127
110


316