Cover for mechanism of the German double socket outlet white Simon 500 Cima

REF. **50001841-030**



BASIC INFORMATION

DESCRIPTION

The Cover for the mechanism of the double Schuko socket outlet white in colour of the Simon 500 Cima series is one of the most demanded products in the industry, both by professionals and private individuals thanks to its multiple qualities. This element needs to be combined with a double socket-outlet with schuko format. With dimensions of 100 x 50 x 9 mm, its structure has been made with halogen-free thermoplastic material. This component will provide security to the electrical installations in private homes, commercial premises or the headquarters of companies because it guarantees no flame propagation in case of fire and the low toxicity in case of smoke all with the best value for money that there are in the market today, a feature that is present in all products and accessories, designed by Simon.

FINISH

White

MATERIAL

Plastic

COMPATIBILITY

German double socket outlets Simon 500 Cima

PACKAGING CONTENTS

Cover for mechanism of the German double socket outlet without viewer or LED light indicator

ETIM CLASS

EC000011

REMARKS

Must be combined with a German double socket outlet

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
Plate with viewer and LED light indicator, plate without viewer and as a replacement for plate with viewer

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C in surface-mount wall installation and +90 °C in flush-mount wall installation

FORMAT
Schuko

INDICATOR FUNCTION
No

IP RATING
IP20

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
2

RAL
9003

VERSION
2 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER
Only with tool

TYPE OF FASTENING
By direct snap-fit on the double socket outlet (no tools needed for fastening))

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface or flush-mount installation

REGULATIONS

REGULATIONS
Dir. 2011/65/UE RoHS + post. mod.|EN IEC 63000:2018|IEC 60884-1 Ed. 3.2|UNE 20315-1-1:2017|UNE 20315-1-2:2017|DS 60884-2-D1:2023

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053254622

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.028

PRODUCT NET WEIGHT
0.028

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053093511

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
52

PACKAGING WIDTH
105

PACKAGING LENGTH
220

PACKAGING MEASUREMENT UNIT
MMT

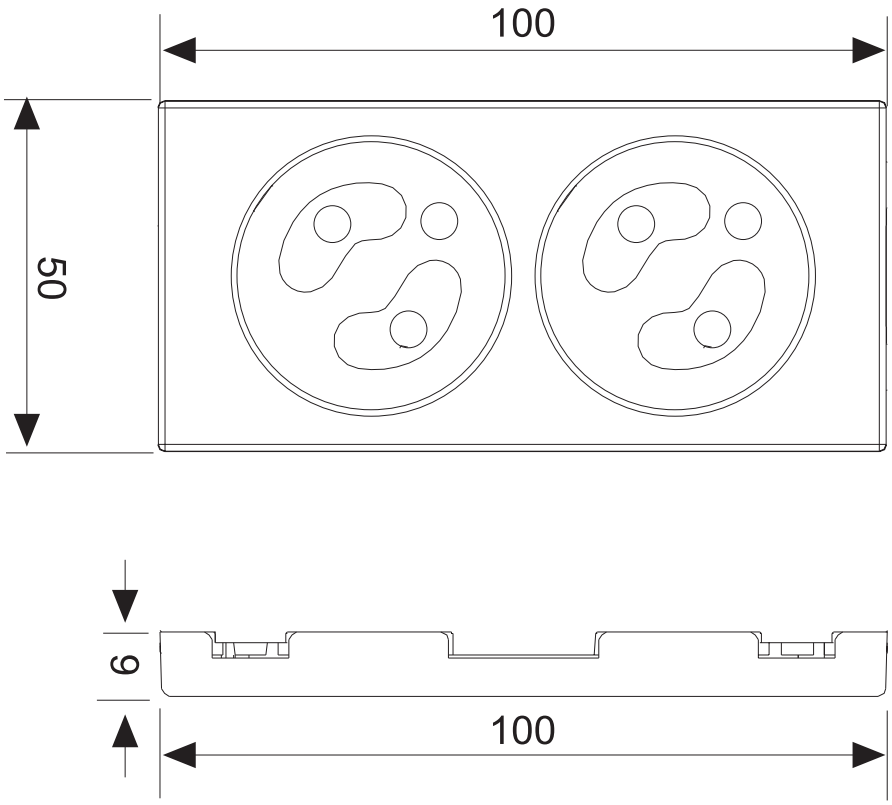
PACKAGING VOLUME
1.201

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.28

PACKAGING WEIGHT UNIT
KGM


100
50
9
100