

## SLIM mini wall-mounted luminaire 4000 K Symmetric Optics White

REF. 90012110-400



### BASIC INFORMATION

#### BODY MATERIAL

Die-cast aluminium

#### PACKAGING CONTENTS

1 Unit

#### ETIM CLASS

EC002892

#### APPLICATION

Domestic, Office, Retail, Hotel, Contract

#### PACKAGING DIMENSIONS (MM)

69x860x175 mm

## TECHNICAL INFORMATION

### FREQUENCY

50 - 60 Hz

### DIRECTIONAL

Yes

### LUMENS (LM)

1300 lm

### IP RATING

IP20

### DRIVER INCLUDED

Yes

### NUMBER OF LUMINAIRES

1

### OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

### ELECTRICAL CLASS

II

### MACADAM STEPS

<3 Step MacAdam

### POWER SUPPLY (V~)

230 V~

### ENERGY EFFICIENCY

A+

### OPTICS

Symmetric

### RAL

9016

### L70 (°C)

100000h at 25°C

### PHOTOBIOLOGICAL CLASSIFICATION

Class II

### COLOR TEMPERATURE (K)

4000 K

### L90 (°C)

30000h at 25°C

### POWER FACTOR (Φ)

> 0,9

### CONTROL

On/Off

### COLOR TYPE

CW

### POWER (W)

16 W


### CRI

80

### LIGHTING EFFICIENCY (LM/W)

hasta 78 lm/W

## PHOTOMETRY ASSETS - POLAR

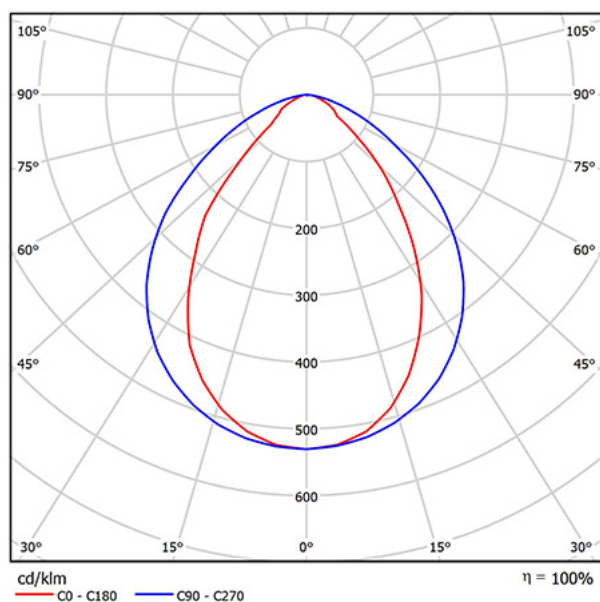

## INSTALLATION AND MAINTENANCE

### INSTALLATION ALTERNATIVES

Suspended, Table-top, Free-standing

### INSTALLATION TYPE

Wall-mounted

## REGULATIONS

### EAC MARKED

Yes

### ECORRAE MARKED

Yes

### WARRANTY

5 years

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8436547039807

### UNITARY PACKAGING HEIGHT

0

### UNITARY PACKAGING WIDTH

0

### UNITARY PACKAGING LENGTH

0

### UNITARY PACKAGING VOLUME

0

### UNITARY PACKAGING GROSS WEIGHT

1.56

### PRODUCT NET WEIGHT

1.32

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING EAN

8436547039807

### UNITS CONTAINED PACKAGING

1

### PACKAGING HEIGHT

69

### PACKAGING WIDTH

175

### PACKAGING LENGTH

860

### PACKAGING MEASUREMENT UNIT

MMT

### PACKAGING VOLUME

10535000

### PACKAGING VOLUME UNIT

MMQ

### PACKAGING GROSS WEIGHT

0.88

### PACKAGING NET WEIGHT

1.32

### PACKAGING WEIGHT UNIT

KGM