Downlight 725.28 4000K DALI

REF. **72528330-884**

BASIC INFORMATION

APPLICATION
General lighting

PACKAGING CONTENTS
1 unit

TECHNICAL INFORMATION

FREQUENCY
50 - 60 Hz

CRI
80

LUMENS/W
2570 lm/23W

IP RATING
IP44

ELECTRICAL CLASS
Type 2

OPTICS
General

OPERATING TEMPERATURE RANGE (ºC)
-10 - 35 ºC

L70 (ºC)
54.000 h at 25ºC

PHOTOBIOLOGICAL CLASSIFICATION
Exempt category

POWER SUPPLY (V~)
220/240 V~

LIGHT BEAM APERTURE ANGLE (º)
121º

POWER (W)
23 W

COLOR TEMPERATURE (K)
4000 K

LIGHTING EFFICIENCY (LM/W)
111 lm/W

SERVICE LIFE
50.000 h

CONTROL
DALI

LUMENS (LM)
2570 lm

CHROMATICS CRI ICONS

CRI
80

PHOTOMETRY ASSETS – CONICAL

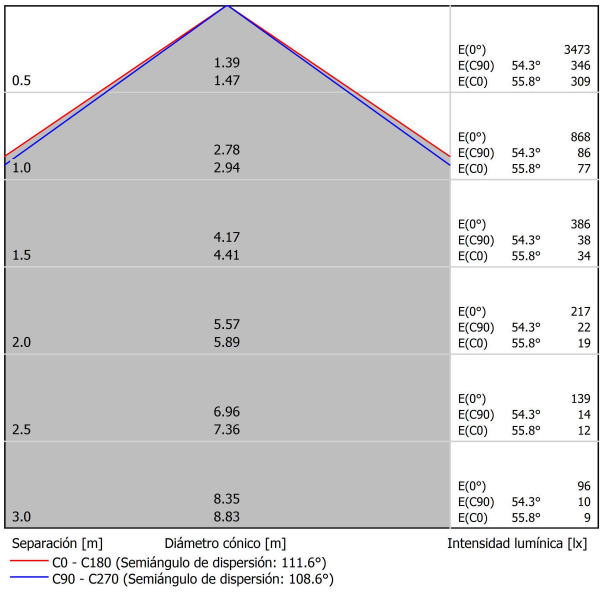

PHOTOMETRY ASSETS – POLAR

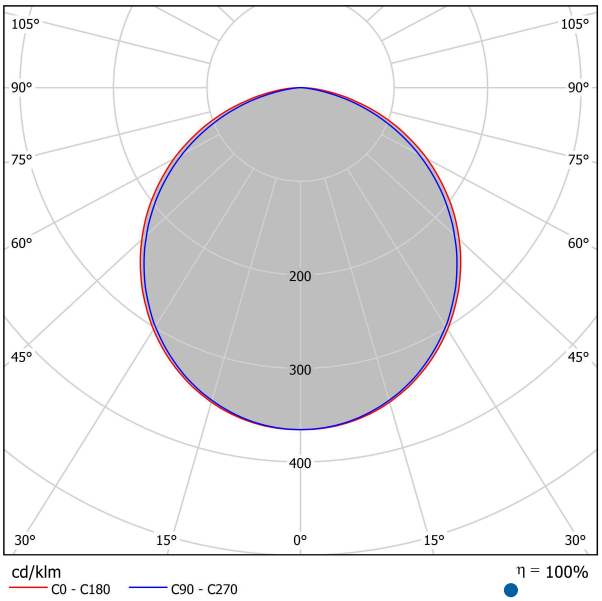

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE
Flush mount

REGULATIONS

WARRANTY
3 years

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053282526

UNITARY PACKAGING HEIGHT
5.5

UNITARY PACKAGING WIDTH
26.5

UNITARY PACKAGING LENGTH
29

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
4226.75

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.9

PRODUCT NET WEIGHT
0.586

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053282526

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
5.5

PACKAGING WIDTH
26.5

PACKAGING LENGTH
29

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
4226.75

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.9

PACKAGING NET WEIGHT
0.586

PACKAGING WEIGHT UNIT
KGM