


## Two-way switch 10 AX 250V~ with quick terminal connection Simon 75

REF. 75201-39

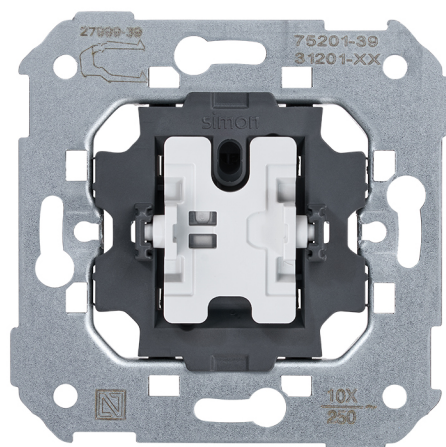

### BASIC INFORMATION

#### DESCRIPTION

Two-way switch with an intensity of 10 AX and a power of 250 V~ including a quick terminal connection system that allows for easy, comfortable, and quick installation of the element; this is thanks to its compatibility with the mechanisms of the Simon 77 series. Because of this, you can have the element installed in a matter of minutes, without wasting a second; you simply need to insert and tighten the mechanism for it to be correctly installed. The element from the Simon 75 series also has the possibility to implement signaling function through a signaling support and key with viewer. The switch is manufactured with the best metallic components with thermoplastic insulation free of halogens, providing you with an element of the best possible quality to perform in different temperature ranges.

#### MATERIAL

Plastic, Metal

#### COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82

#### PACKAGING CONTENTS

Mechanism

#### ETIM CLASS

EC001590

#### REMARKS

Possibility of implementing signalling function using cradle blinking and rocker with viewer

## TECHNICAL INFORMATION

AVAILABLE MARKET CE	CURRENT (A) 10 AX	OPERATING TEMPERATURE RANGE (°C) 5 - 40 °C
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	IP RATING IP21	RECESS DIMENSION (MM) 40
NUMBER OF CONTACTS 3	LINKABLE No	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
NUMBER OF POSSIBLE ELEMENTS 1 element	TYPE OF MECHANISM Pivoting	VERSION Single
FREQUENCY 50 Hz	MONOBLOCK No	VOLTAGE (V~) 250 V~
INDICATOR FUNCTION No	NOMINAL VOLTAGE (V~) 250 V~	NUMBER OF WIRES 3

## INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 15	REMOVAL OF COVER Only with tool	INSTALLATION TYPE Suitable for surface and flush mounting
CLAW Simon 27	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Fast

## REGULATIONS

### REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

## LOGISTICS INFORMATION

UNITARY EAN CODE 8421053255834	UNITARY PACKAGING GROSS WEIGHT 0.06	PACKAGING LENGTH 221
UNITARY PACKAGING HEIGHT 0	PRODUCT NET WEIGHT 0.06	PACKAGING MEASUREMENT UNIT MMT
UNITARY PACKAGING WIDTH 0	UNITARY PACKAGING WEIGHT UNIT KGM	PACKAGING VOLUME 3026595
UNITARY PACKAGING LENGTH 0	PACKAGING EAN 8421053003589	PACKAGING VOLUME UNIT MMQ
UNITARY PACKAGING MEASUREMENT UNIT MMT	UNITS CONTAINED PACKAGING 10	PACKAGING GROSS WEIGHT 0.585
UNITARY PACKAGING VOLUME 0	PACKAGING HEIGHT 83	PACKAGING NET WEIGHT 0.6
UNITARY PACKAGING VOLUME UNIT MMQ	PACKAGING WIDTH 165	PACKAGING WEIGHT UNIT KGM

