


Rocker with viewer for push button switch with indicator light function for 1 element black Simon K45

REF. K114/14

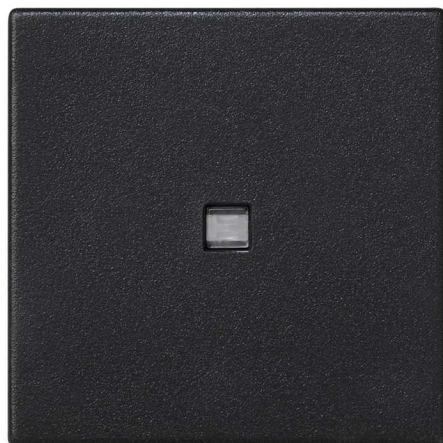

BASIC INFORMATION

DESCRIPTION

Use their electric mechanism in situations with low lighting with rocker with viewer for push-button switch with incorporated indicator light from the Simon K45 collection with a black finish and a compact size 45 x 45 mm and 10 mm depth, guaranteeing the integration of the set in all types of spaces, adding a style current and simple, suitable for all types of environments and decorative styles. It is designed for installation both flush mounted and surface-mounted, which maximize the versatility of the product, allowing you to adapt to the specific needs of each space. Manufactured with thermoplastic materials halogen-free, prevents the flame spread and toxicity by smoke in case of fire, and can reach maximum temperatures of more than 60 °C.

FINISH

Black

MATERIAL

Plastic

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Rocker and installation manual

ETIM CLASS

EC000011

REMARKS

Used to signal the mechanism and spot it in the dark

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

AVAILABLE IN

Quarter and half module versions

KIT AVAILABILITY

No

NUMBER OF MODULES

Half

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

RAL

7021

INDICATOR FUNCTION

Yes

VERSION

Single

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

Fixing by direct snap-fit, no tools needed

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0.3

UNITARY PACKAGING VOLUME
UNIT
MMQ

UNITARY PACKAGING GROSS
WEIGHT
0.01

PRODUCT NET WEIGHT
0.01

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING EAN
8426436047143

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
75

PACKAGING WIDTH
105

PACKAGING LENGTH
75

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
590625

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.96

PACKAGING NET WEIGHT
0.1

PACKAGING WEIGHT UNIT
KGM