Thermostat for electric underfloor heating Simon iO with included probe gloss black Simon 100

REF. **10000811-138**



BASIC INFORMATION

FINISH
Gloss black

MATERIAL
Various

PACKAGING CONTENTS
Mechanism and instructions

ETIM CLASS
EC003263

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF POSSIBLE ELEMENTS
1 element

INDICATOR FUNCTION
No

CURRENT (A)
10 A

CONNECTIVITY PROTOCOL
Z-wave

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

POWER SUPPLY (V~)
127/230 V~

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

INSTALLATION AND MAINTENANCE

CLAW

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION DIRECTION
Vertical

INSTALLATION TYPE
Suitable for recess

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053217474

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.329

PRODUCT NET WEIGHT
0.25

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053217474

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
75

PACKAGING WIDTH
105

PACKAGING LENGTH
127

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
1000125

PACKAGING VOLUME UNIT
MMQ


PACKAGING GROSS WEIGHT
0.329

PACKAGING NET WEIGHT
0.25


PACKAGING WEIGHT UNIT
KGM



Instalación centralizada para caldera/bomba de calor
Centralized installation for boiler/heat pump

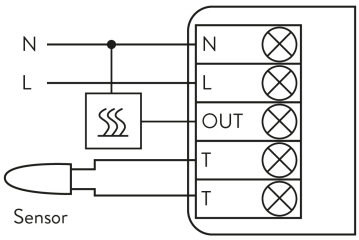

Instalación suelo radiante eléctrico
Installation with electric floor



Instalación zonificada a 230V con contacto Normalmente Abierto
230V installation with Normally Open contact

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet