Service cover for 2 elements for installation in concrete floor or raised floor graphite Simon 500 Cima

REF. **52054101-038**



BASIC INFORMATION

DESCRIPTION

This product belongs to the Simon 500 Cima range. This is a service cover for sets capable of providing energy to two equipment and is specially designed to be flush mounted into concrete or raised floor. If you do not install the set in the same floor covering, there is the option of combining the product with a flush-mount trim cover, also from Simon, with reference 52053101-038. The cover is made up of two modules and has dimensions of 132 x 187 millimetres and 66 millimetres of depth. It comes in an innovative graphite colour that responds to the latest trends in decoration, and it is ideal for any room in the home, office or premises, where it is placed. The manufacturing materials of the cover are components with self-extinguishing and halogen-free thermoplastic insulation. This means that the product has a high resistance to low or very high temperatures ranging from -5 and 60 degrees centigrade. Also, in case of fire, the cover does not contribute to spreading the flame and it reduces the toxicity of smoke.

FINISH

Graphite

MATERIAL

Plastic

PACKAGING CONTENTS

Service cover and installation manual

ETIM CLASS

EC001903

REMARKS

Once the product has been installed, you have the option to combine it with the flush-mount trim cover (ref.52053101-038) in cases where you do not install the same floor covering.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
2 modules

RAL
7021

RECESS DIMENSION (MM)
170 x 115 mm

VERSION
2 elements

INSTALLATION AND MAINTENANCE

CLAW RANGE OF OPERATION (MM)
Between 14 and 54 mm

NUMBER OF COVER OPENING POSITIONS
2

REMOVAL OF COVER
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using fastening claws on the concrete floor tray or the raised floor tile (provided in the service cover)

CAN BE INSTALLED IN TRAY
Plástica

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised floor and concrete floor

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053101599

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.55

PRODUCT NET WEIGHT

0.55

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053101599

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

95

PACKAGING WIDTH

155

PACKAGING LENGTH

195

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

2.871

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

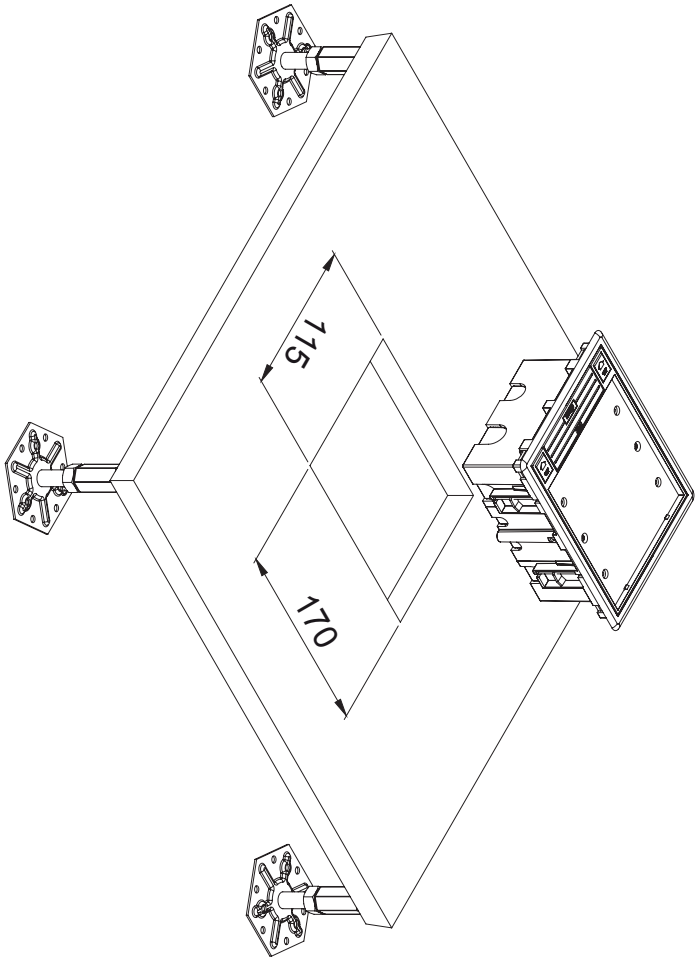
0

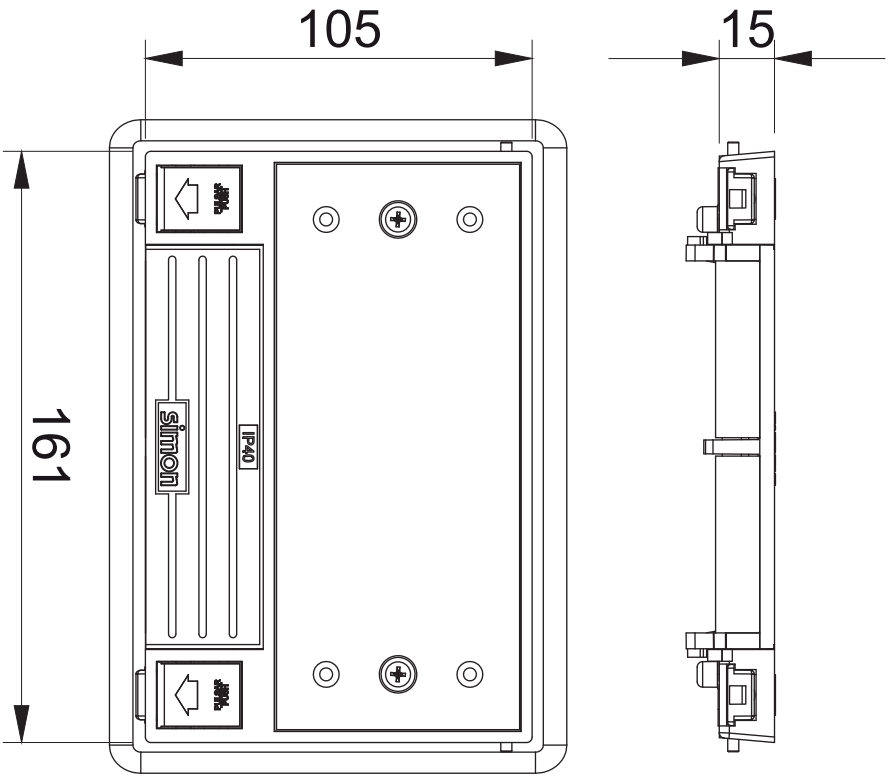
PACKAGING NET WEIGHT

0.55

PACKAGING WEIGHT UNIT

KGM


175
170


105
15
161
simon
IP40