


2P+T socket with 2 USB chargers with chassis 1.0A(left), 2.1A(right) 110/125V~ graphite Simon 26

REF. 2600454-038

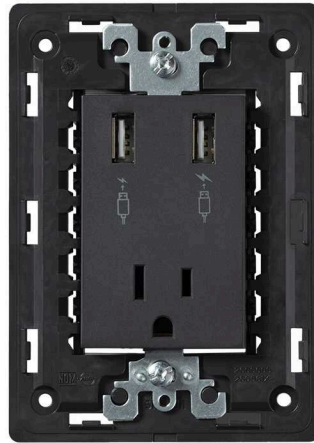

BASIC INFORMATION

FINISH

Graphite

TECHNICAL INFORMATION

CABLE SECTION ADMITTED (MM)

3,3 mm

NOMINAL VOLTAGE (V~)

110/125 V~

USB CURRENT (A)

1.0A(izq), 2.1A(dcho)

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

POWER SUPPLY (V~)

110/125 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
42

UNITARY PACKAGING WIDTH
65.1

UNITARY PACKAGING LENGTH
105

UNITARY PACKAGING
MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0.287

UNITARY PACKAGING VOLUME
UNIT
DMQ

UNITARY PACKAGING GROSS
WEIGHT
140

PRODUCT NET WEIGHT
140

UNITARY PACKAGING WEIGHT
UNIT
GRM

PACKAGING EAN
7506207322189

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
60

PACKAGING WIDTH
87

PACKAGING LENGTH
126

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
0.658

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0.14

PACKAGING NET WEIGHT
140

PACKAGING WEIGHT UNIT
KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO


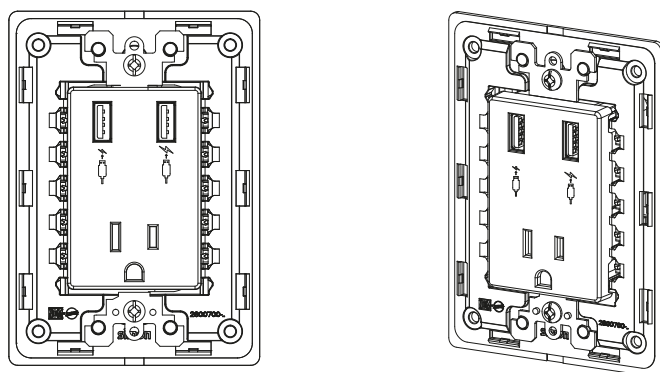


DIAGRAMA DE MONTAJE



*Placa NO incluida

DIAGRAMA DE CONEXIÓN

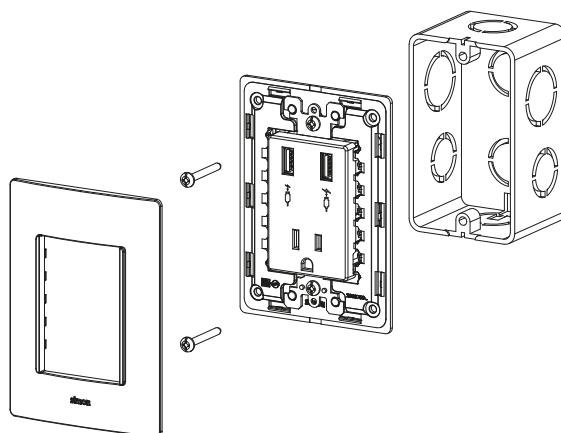