


Rocker with viewer for switch with pilot light for 1 element white Simon K45

REF. K112/9

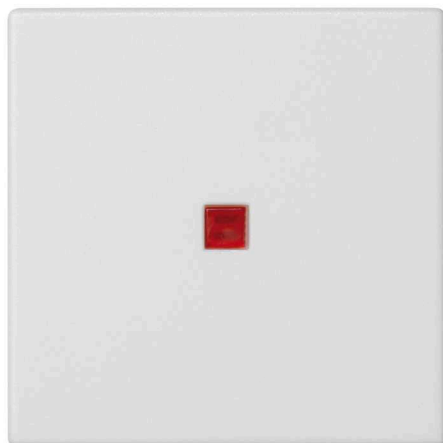

BASIC INFORMATION

DESCRIPTION

Rocker with viewer for 2-way switch with pilot light for 1 element, in white colour and finish of the series Simon K45. It is available in quarter and half module versions and is used to determine with the pilot light whether the load on which it acts is on or off. It is suitable both for surface-mounted or to be flush mounted and withstands, to perfection, temperatures between 5 to 60 ° C, approximately, although it is able to operate correctly in rooms with a temperature great greater than the maximum. Complies with the regulations UNE -s 60669-1: 2002 + A1: 2003 + A2: 2009 and is manufactured in halogen-free thermoplastic, which is a material that guarantees no flame spread in case of fire in case of fire and low toxicity in case of smoke. Its dimensions are 45x45x10 mm and to clean it, just wipe it with a soft and dry cloth, without resorting to never abrasive cloths and / or abrasive cleaners containing chlorine.

FINISH

White

MATERIAL

Plastic

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-030)

PACKAGING CONTENTS

Rocker and installation manual

ETIM CLASS

EC000011

REMARKS

Used to determine with the pilot light whether the load on which it acts is on or off

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

AVAILABLE IN

Quarter and half module versions

KIT AVAILABILITY

No

NUMBER OF MODULES

Half

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

RAL

9003

INDICATOR FUNCTION

Yes

VERSION

Single

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

Fixing by direct snap-fit, no tools needed

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-030)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0.3

UNITARY PACKAGING VOLUME
UNIT
MMQ

UNITARY PACKAGING GROSS
WEIGHT
0.01

PRODUCT NET WEIGHT
0.01

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING EAN
8426436047068

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
72

PACKAGING WIDTH
72

PACKAGING LENGTH
105

PACKAGING MEASUREMENT
UNIT
MMT

PACKAGING VOLUME
544320

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.96

PACKAGING NET WEIGHT
0.1

PACKAGING WEIGHT UNIT
KGM