British socket outlet 13A with screw terminal connection without switch graphite K45

REF. **K04/14**



BASIC INFORMATION

FINISH
Graphite

MATERIAL
Plastic

COMPATIBILITY
Simon K45 enclosures for installation on wall, floor, ceiling, and furniture, and Simon 500 Cima enclosures (requires combination with K45 to 500 Cima adapter ref. 50012088-030).

ETIM CLASS
EC000125

TECHNICAL INFORMATION

FORMAT
British

IP RATING
IP20

RAL
7021

CURRENT (A)
13 A

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
12

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-10-2)

REMOVAL OF THE SOCKET
Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0.3

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.049

PRODUCT NET WEIGHT
0.039

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436043817

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
49

PACKAGING WIDTH
101

PACKAGING LENGTH
245

PACKAGING MEASUREMENT UNIT
MMT

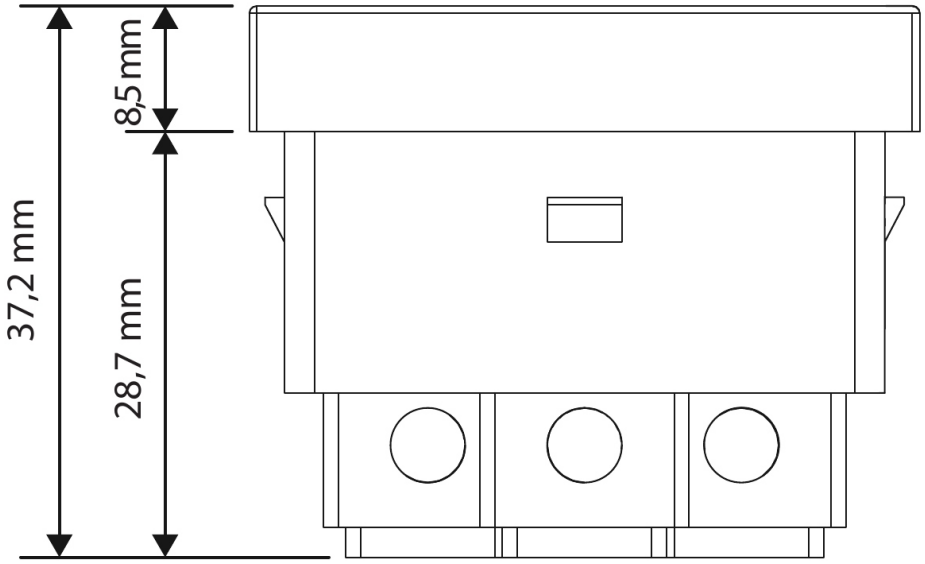
PACKAGING VOLUME
3687005

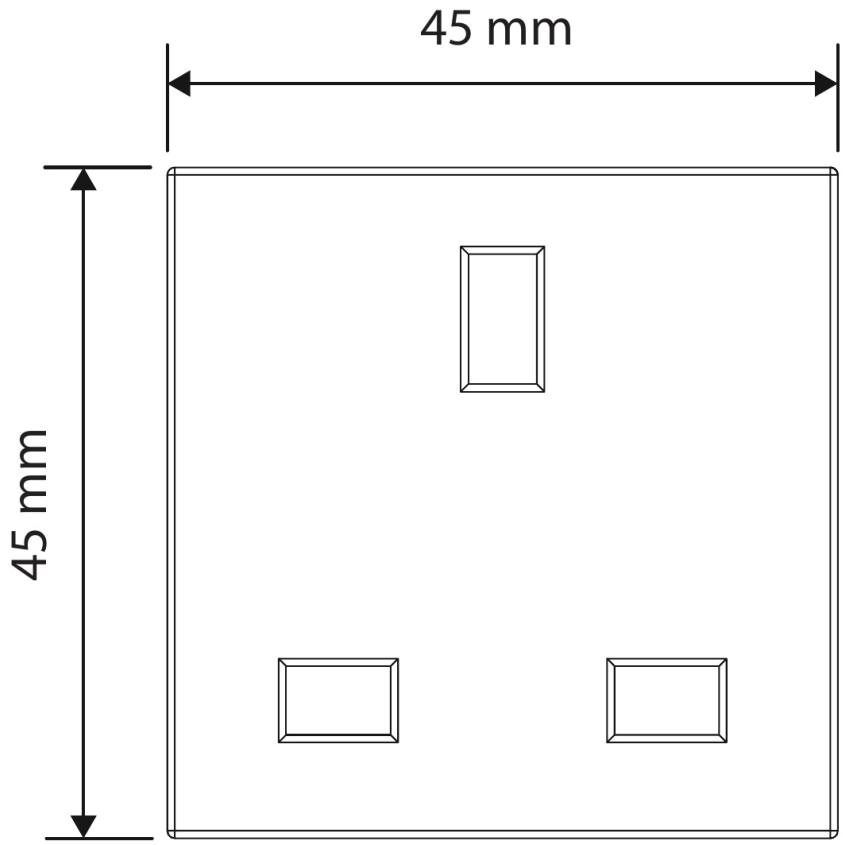
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.492

PACKAGING NET WEIGHT
0.39

PACKAGING WEIGHT UNIT
KGM


37,2 mm
8,5 mm
28,7 mm


45 mm
45 mm