French double socket outlet 16A 250V~ with safety device and 1Click® terminal connection white Simon 500 Cima

REF. **50000468-030**



BASIC INFORMATION

DESCRIPTION

Double French socket outlet 16 A of current and 250V. has a safety device included. The type of rocker operation of this socket outlet Simon is by cutting 1click. It is part of the Simon 500 Cima series and commitment to a stylish and simple finish is white in colour. As far as the installation is concerned, it is very versatile, since it can be placed in surface-mounted or recessed. The sockets and covers for electrical outlets Simon guarantees the highest quality through the security that offer. They support extreme temperatures (-25 to + 60 degrees centigrade). This is due to its components of manufacture, which advocate by metal materials with thermoplastic insulation and without any type of halogens. The socket outlet Simon 500 Cima has two modules and supports a cable section between 1.5 and 2.5 millimetres. It does not need any type of stripped wire for its installation optimum. The dimensions of the product are of 100 x 50 millimetres and 46 millimetres of depth.

FINISH

White

COMPATIBILITY

Simon 500 Cima enclosures

PACKAGING CONTENTS

Double socket outlet with cover and installation manual

ETIM CLASS

EC000125

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF CONNECTIONS PER TERMINAL
1 terminal connection for click terminal connection system and 2 terminal connections for screw terminal connection system

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

FORMAT
French

HEAT RESISTANCE (°C)
+125°C (according rule IEC 60695-10-2)

INDICATOR FUNCTION
No

INSULATION RESISTANCE (V-MΩ)
>5MOhms at 500V

CURRENT (A)
16 A

IP RATING
IP20

LINKABLE
Yes, using accessory 50000996-039

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-25 to 60 °C

TYPE OF MECHANISM
Insertion

NUMBER OF MODULES
2

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

RAL
9003

NUMBER OF SOCKETS
2

VERSION
Double

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
0

REMOVAL OF COVER
Only with tool

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-10-2)

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Specific Simon 500 Cima

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE SOCKET
Only with tool

TYPE OF TERMINAL CONNECTION - FUNCTION 1
1 click connection (1 click®)

NUMBER OF TERMINALS
3 inputs and 3 outputs

REGULATIONS

REGULATIONS

Dir. 2011/65/UE RoHS + post. mod.|EN IEC 63000:2018|IEC 60884-1 Ed. 3.2|UNE 20315-1-1:2017|UNE 20315-1-2:2017|DS 60884-2-D1:2023

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.111

PRODUCT NET WEIGHT
0.111

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053106396

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
112

PACKAGING WIDTH
117

PACKAGING LENGTH
269

PACKAGING MEASUREMENT UNIT
MMT

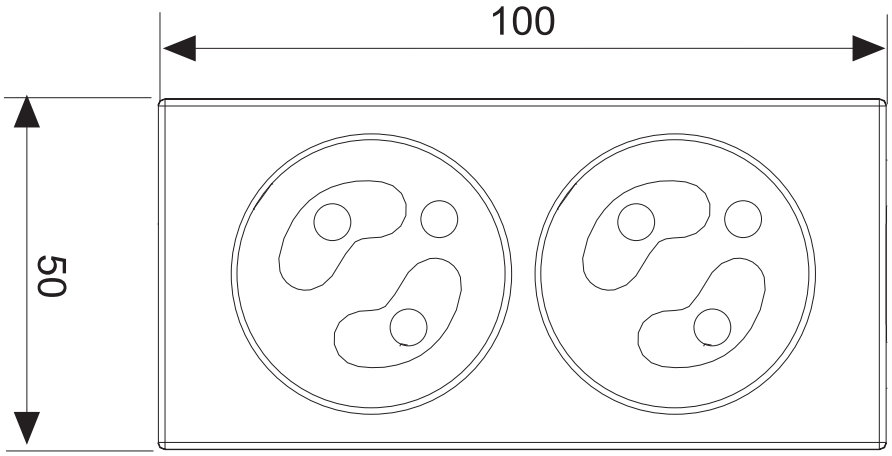
PACKAGING VOLUME
3.525

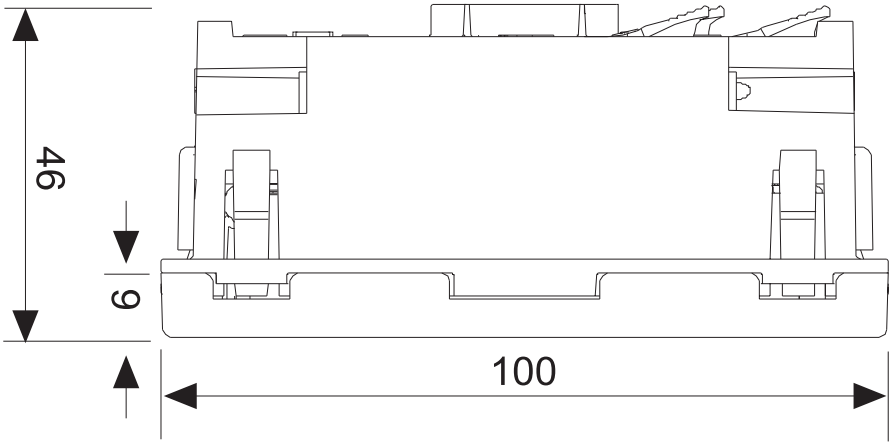
PACKAGING VOLUME UNIT
DMQ

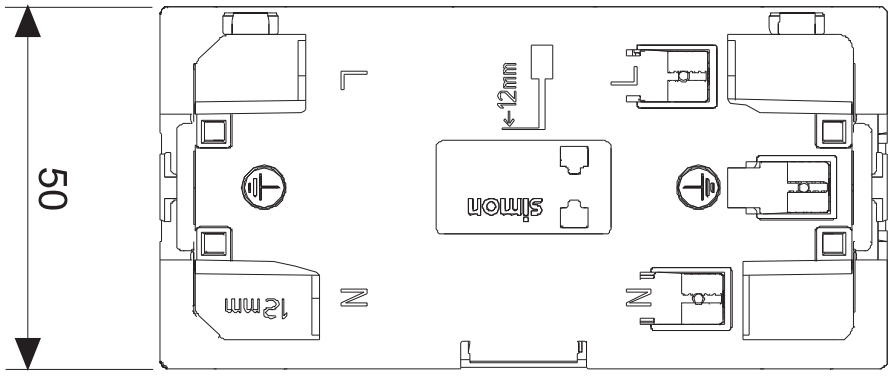
PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.11

PACKAGING WEIGHT UNIT
KGM


100
50


46
9
100


50
12mm
simon
12mm
N
N