
Group of 2 two-way switches 10 AX 250V~ with integrated light indicator and quick terminal connection system Simon 75

REF. **75394-39**

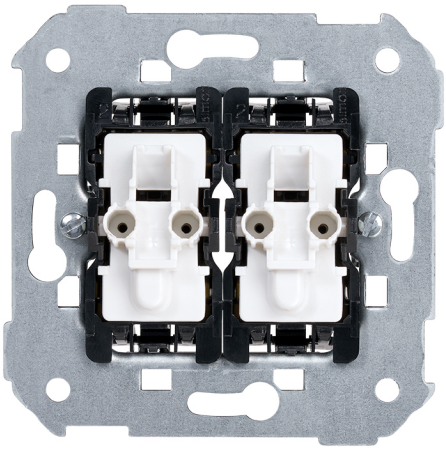

BASIC INFORMATION

DESCRIPTION

This group of 2 two-way switches 10 AX 250V~ with integrated light indicator also features a quick terminal connection system, which significantly facilitates its installation. The mechanism is suitable for surface and flush-mounted installation and is integrated into the Simon 75 series. It contains metal parts with halogen-free thermoplastic insulation, a safe and durable material that provides maximum protection in the home. It is a product that complies with current regulations and can be installed in all types of environments, thanks to its resistance to extreme temperatures. The Simon 75 collection consists of an extensive range of devices in various finishes suitable for any decorative space. Its pieces allow multiple combinations and have practical electronic functions. The Simon 75 series is compatible with the Simon 77 mechanisms, a collection that makes it possible to connect the wires to each other without stripping, twisting, or using complex tools.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)
1 mA

NUMBER OF CONTACTS
4

NUMBER OF POSSIBLE ELEMENTS
1 element

FREQUENCY
50 Hz

INDICATOR FUNCTION
Yes

CURRENT (A)
10 AX

IP RATING
IP20

LINKABLE
No

TYPE OF MECHANISM
Pivoting

MONOBLOCK
No

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

RECESS DIMENSION (MM)
30

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Double

VOLTAGE (V~)
250 V~

NUMBER OF WIRES
6

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

REMOVAL OF COVER
Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255995

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

3026595

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.073

PRODUCT NET WEIGHT

0.073

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053036624

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

82

PACKAGING WIDTH

165

PACKAGING LENGTH

223

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT


0.73

PACKAGING NET WEIGHT

0.73

PACKAGING WEIGHT UNIT

KGM

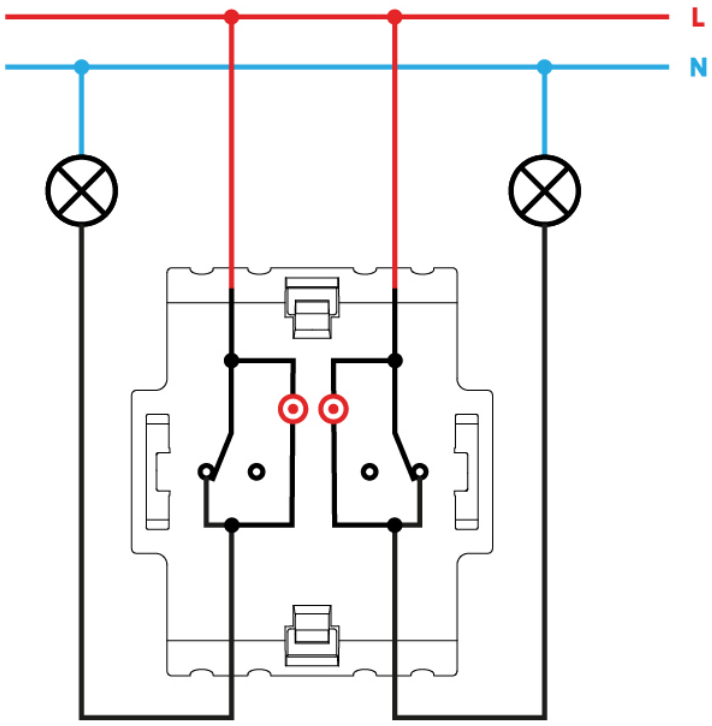
L
N