


PD-4x4 Slim PIR+LUX recessed box KNX black IP20

REF. 89219710-238

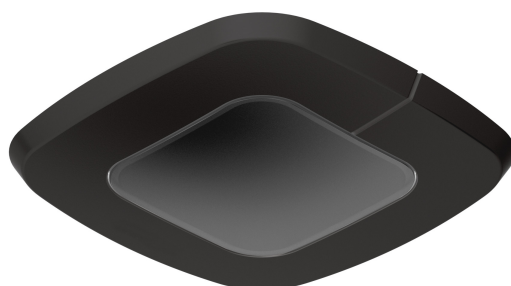

BASIC INFORMATION

DESCRIPTION

PIR flush-mounted presence and luminosity detector. The recommended installation height is 2.8 m, with a maximum height of 4 m. It has a detection angle of 360° and an opening angle of 71°. The tangential detection range is 4 x 4 m and the radial detection range is 4 x 4 m.

The luminosity regulation range is 10 - 1000 lux and the timing range is 1 min - 255 min. The configuration of the detector is done via potentiometers and KNX.

It has a TEACH operating mode. Possibility of interconnection between sensors via KNX. The control protocol is KNX. The typical consumption is 10 mA.

The power supply voltage is KNX (21 - 30 VDC). The operating temperature of the detector is: 0 - 40 °C.

Black finish, IP 20 protection rating and dimensions: 80 x 80 x 50 mm.

5-year warranty.

For more product information, visit STEINEL website by clicking [here](#)

FINISH

Black

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

ETIM CLASS

EC001582

TECHNICAL INFORMATION

IP RATING

IP20

RAL

9005

POWER SUPPLY (V~)

Bus KNX (21 Vcc...32 Vcc)

CONTROL

KNX

INSTALLATION AND MAINTENANCE

MINIMUM INSTALLATION HEIGHT

2.5

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053343197

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.16

PRODUCT NET WEIGHT

0.062

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053343197

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

130

PACKAGING WIDTH

90

PACKAGING LENGTH

90

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1053000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.16

PACKAGING NET WEIGHT

0.062

PACKAGING WEIGHT UNIT

KGM