


## Group of 2 two-way switches 10 AX 250V~ with integrated light indicator and quick terminal connection system Simon 75

REF. 75394-39

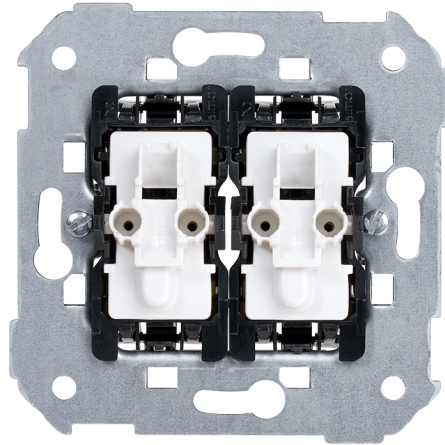

### BASIC INFORMATION

#### DESCRIPTION

This group of 2 two-way switches 10 AX 250V~ with integrated light indicator also features a quick terminal connection system, which significantly facilitates its installation. The mechanism is suitable for surface and flush-mounted installation and is integrated into the Simon 75 series. It contains metal parts with halogen-free thermoplastic insulation, a safe and durable material that provides maximum protection in the home. It is a product that complies with current regulations and can be installed in all types of environments, thanks to its resistance to extreme temperatures. The Simon 75 collection consists of an extensive range of devices in various finishes suitable for any decorative space. Its pieces allow multiple combinations and have practical electronic functions. The Simon 75 series is compatible with the Simon 77 mechanisms, a collection that makes it possible to connect the wires to each other without stripping, twisting, or using complex tools.

#### MATERIAL

Plastic, Metal

#### COMPATIBILITY

Marcos Simon 75, Simon 82  
Detail, Simon 82 Nature, Simon  
82 Concept and Simon 82

#### PACKAGING CONTENTS

Mechanism

#### ETIM CLASS

EC001590

## TECHNICAL INFORMATION

<b>AVAILABLE MARKET</b> CE	<b>INDICATOR FUNCTION</b> Yes	<b>OPERATING TEMPERATURE RANGE (°C)</b> 5 - 40 °C
<b>CABLE SECTION ADMITTED (MM)</b> From 1,5 to 2,5 mm	<b>CURRENT (A)</b> 10 AX	<b>RECESS DIMENSION (MM)</b> 30
<b>CONSUMPTION INDICATOR (MA)</b> 1 mA	<b>IP RATING</b> IP20	<b>STORAGE TEMPERATURE RANGE (°C)</b> -25 - 50 °C
<b>NUMBER OF CONTACTS</b> 4	<b>LINKABLE</b> No	<b>VERSION</b> Double
<b>NUMBER OF POSSIBLE ELEMENTS</b> 1 element	<b>TYPE OF MECHANISM</b> Pivoting	<b>VOLTAGE (V~)</b> 250 V~
<b>FREQUENCY</b> 50 Hz	<b>MONOBLOCK</b> No	<b>NUMBER OF WIRES</b> 6
	<b>NOMINAL VOLTAGE (V~)</b> 250 V~	

## INSTALLATION AND MAINTENANCE

<b>CABLE STRIPPING NECESSARY (MM)</b> 11	<b>REMOVAL OF COVER</b> Only with tool	<b>INSTALLATION TYPE</b> Suitable for surface and flush mounting
<b>CLAW</b> Simon 27	<b>INSTALLABLE IN FLUSH MOUNT JUNCTION BOX</b> Universal	<b>TYPE OF TERMINAL CONNECTION - FUNCTION 1</b> Fast

## REGULATIONS

### REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

## LOGISTICS INFORMATION

UNITARY EAN CODE	UNITARY PACKAGING GROSS WEIGHT	PACKAGING LENGTH
8421053255995	0.073	223
UNITARY PACKAGING HEIGHT	PRODUCT NET WEIGHT	PACKAGING MEASUREMENT UNIT
0	0.073	MMT
UNITARY PACKAGING WIDTH	UNITARY PACKAGING WEIGHT UNIT	PACKAGING VOLUME
0	KGM	3026595
UNITARY PACKAGING LENGTH	PACKAGING EAN	PACKAGING VOLUME UNIT
0	8421053036624	MMQ
UNITARY PACKAGING MEASUREMENT UNIT	UNITS CONTAINED PACKAGING	PACKAGING GROSS WEIGHT
MMT	10	0.73
UNITARY PACKAGING VOLUME	PACKAGING HEIGHT	PACKAGING NET WEIGHT
3026595	82	0.73
UNITARY PACKAGING VOLUME UNIT	PACKAGING WIDTH	PACKAGING WEIGHT UNIT
MMQ	165	KGM

