
# Simon iO master switch for blinds copper Simon 270

REF. **21000133-091**

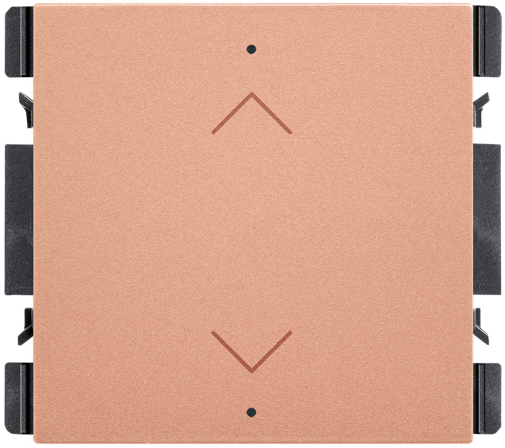

## BASIC INFORMATION

### DESCRIPTION

Simon iO master switch for blinds from the Simon 270 series, operated by pressing and turning, for the control of motorised blinds and awnings. Arrow symbol and electrical interlock. Cable cross-section from 1.5 to 2.5 mm, with 7 mm of stripped cable and screw terminals. Made of thermoplastic, it measures 45 x 45 mm. It communicates via Wi-Fi for remote control and integration into the Simon iO ecosystem. Rated voltage 230 V~ at 50-60 Hz. Suitable for flush mounting in a universal back box, in a vertical or horizontal position. Protection rating IP20. Operating temperature range: 0 to 40 °C. Storage temperature range: -20 to 85 °C. Clean with a soft cloth lightly dampened with soapy water, avoiding abrasive or chlorine-based cleaners. Up to 9 available finish colours: 090 Glossy White; 190 Matte White; 091 Copper; 093 Aluminium; 094 Champagne; 095 Gold; 096 Titanium; 097 Bronze; 098 Matte Black.

### FINISH

Copper

### MATERIAL

Thermoplastic

### PACKAGING CONTENTS

iO Master Blinds and instruction sheet

### SYMBOL

Arrow

### COMPATIBILITY

Simon 270 frames

### ETIM CLASS

EC000044

### REMARKS

The blinds master is a device that is associated with a blinds switch and allows a blind, awning or similar to be raised or lowered from another control point, either physically or remotely via the Simon iO application. The maximum number of blinds that can be associated is 20.

## TECHNICAL INFORMATION

### AVAILABLE MARKET
CE

### CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

### NUMBER OF POSSIBLE ELEMENTS
1 element

### FREQUENCY
50 - 60 Hz

### INDICATOR FUNCTION
Yes

### IP RATING
IP20

### MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TYPE OF MECHANISM
Pivoting

### OPERATING TEMPERATURE RANGE (°C)
0 - 40 °C

### POWER SUPPLY (V~)
127/230 V~

### RAL
1035

### STORAGE TEMPERATURE RANGE (°C)
-20 - 85 °C

### VOLTAGE (V~)
127/230 V~

## INSTALLATION AND MAINTENANCE

### CABLE STRIPPING NECESSARY (MM)
7

### INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

### INSTALLATION DIRECTION
Horizontal, Vertical

### INSTALLATION TYPE
Suitable for flush mounting

### TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

## REGULATIONS

### REGULATIONS
Dir. 2011/65/UE RoHS + post. mod.|Dir. 2014/53/UE RED|EN 50428:2005 |EN 50428:2005 A1:2007 |EN 50428:2005 A2:2009 |EN IEC 63000:2018 |ETSI EN 300328 V2.2.2

# LOGISTICS INFORMATION

UNITARY EAN CODE
8421053281628

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.051

PRODUCT NET WEIGHT
0.051

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053281628

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
80

PACKAGING WIDTH
55

PACKAGING LENGTH
55

PACKAGING MEASUREMENT UNIT
MMT


PACKAGING VOLUME
242000

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.075

PACKAGING NET WEIGHT
0.051

PACKAGING WEIGHT UNIT
KGM

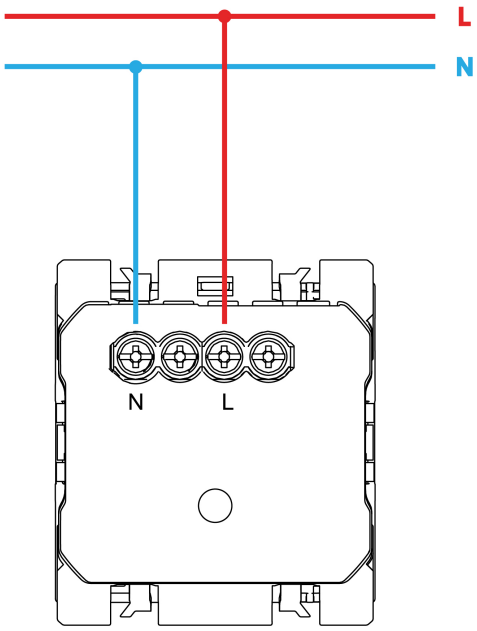


Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet