
Push button 10A 250V~ with built-in light and screw terminal connection system Simon 73

REF. **73160-39**

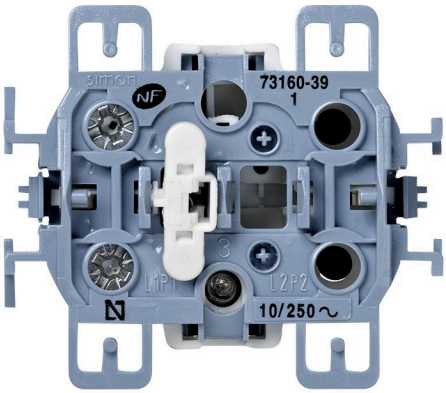

BASIC INFORMATION

DESCRIPTION

With the push-button switch of the collection Simon 73 Loft, you will obtain an elegant and sophisticated finishes such as a complement perfect for a design suitable for installation in surface-mounted or trunking, with the minimum thickness. This push-button switch, with built-in indicator light light with a consumption of 0.55 milliampere, and can be implemented the signaling function by means of a signaling support and cover with viewer. It is also compatible with power supplies with a voltage of 250 Volts and intensity of 10 Amps with amplitude modulated (AM). Designed with screw terminal connection, its components are made of metal materials with halogen-free thermoplastic isolated, for greater protection in case of fire. It can reach a temperature range of 5 to 40 ° C and maximum temperatures ranging from -25 and 50 °C. The push-button switch Simon 73 Loft, has a rocker operation and supports a cable section of 1.5 to 2.5 mm and stripping of the 13 mm Functionality, innovation and designs that adapt to all types of spaces in the collection Simon 73 Loft.

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 73 Loft and Simon 73 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

REMARKS

Possibility of implementing indicator function using a signal light support and rocker with viewer.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)

0.55 mA

NUMBER OF POSSIBLE ELEMENTS

1 element

INDICATOR FUNCTION

Yes

IP RATING

IP20

TYPE OF MECHANISM

Pivoting

MONOBLOCK

No

NOMINAL VOLTAGE (V~)

250 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
13

INSTALLATION TYPE
Suitable for surface mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

REGULATIONS

REGULATIONS
No aplica

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053255339

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
1201200

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.027

PRODUCT NET WEIGHT
0.027

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053028742

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
52

PACKAGING WIDTH
105

PACKAGING LENGTH
220

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1201200

PACKAGING VOLUME UNIT
MMQ


PACKAGING GROSS WEIGHT
0.276

PACKAGING NET WEIGHT
0.27


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 73


Mecanismos básicos / Basic switches




Interruptor unipolar / Single-pole switch
73101-39




Pulsador / Push button switch
73150-39



Interruptor bipolar / Double pole switch
73131-39

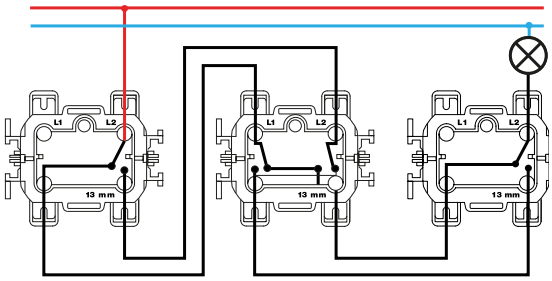


Conmutador cruce / Intermediate switch
73251-39

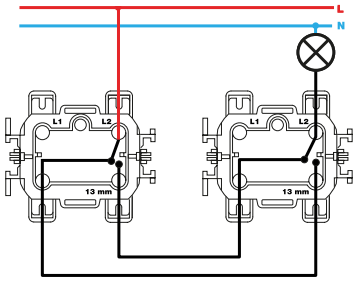

Conmutador / 2-way switch
73201-39

Mecanismos con luminoso / Switces with light



Pulsador / Push button switch
73160-39