


Flush-mount trim cover for adjustable floor box or service cover 4 elements graphite Simon 500 Cima

REF. 52053102-038

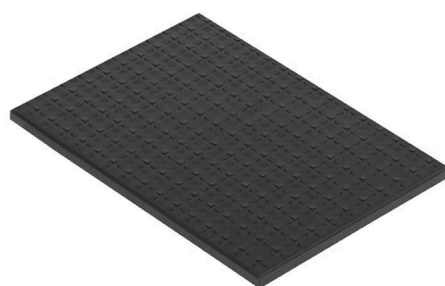

BASIC INFORMATION

DESCRIPTION

With an optional element to combine with the floor box if not installing the same floor lining, the Flush-mount trim cover for adjustable floor box or service cover with four elements in graphite colour of the Simon 500 Cima series, it is a product that is highly demanded by private individuals and professionals to complete the electrical installations of private homes, commercial premises and corporate headquarters. This is a very present in public and private buildings with a high daily activity thanks to the features resistant and durable of its structure, which has been designed with halogen-free thermoplastic material. Also, these components guarantees no flame propagation in case of fire and the low toxicity in case of smoke 154 x 107 x 5 mm are the dimensions of this cover, whose competitive price is unrivalled in the market today.

FINISH

Graphite

PACKAGING CONTENTS

Trim cover

MATERIAL

Plastic

ETIM CLASS

EC002417

REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IK CLASSIFICATION

08

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

AVAILABLE IN

2, 4, 6, 8 and 12 elements

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

NUMBER OF MODULES

4 modules

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

IP RATING

IP4X

RAL

7021

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

KIT AVAILABILITY

No

VERSION

4 elements

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

Using the screws supplied

INSTALLATION TYPE

In raised or concrete floor with adjustable floor boxes or service covers

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

INSTALLATION DIRECTION

Horizontal, Vertical

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING MEASUREMENT
UNIT
MMT

UNITARY PACKAGING WIDTH
0

PACKAGING EAN
8421053101513

PACKAGING VOLUME
2.116

UNITARY PACKAGING LENGTH
0

UNITS CONTAINED PACKAGING
10

PACKAGING VOLUME UNIT
DMQ

UNITARY PACKAGING VOLUME
0

PACKAGING HEIGHT
75

PACKAGING GROSS WEIGHT
0

UNITARY PACKAGING GROSS
WEIGHT
0.078

PACKAGING WIDTH
165

PACKAGING NET WEIGHT
0.78

PRODUCT NET WEIGHT
0.078

PACKAGING LENGTH
170

PACKAGING WEIGHT UNIT
KGM

