Metal mini tower with 3 heights and 1 side for 6 elements stainless steel Simon 500 Cima

REF. **52510213-036**



BASIC INFORMATION

DESCRIPTION

Simon, through its 500 Cima range, brings solutions comprehensive for large spaces, or places where the cabling must necessarily be by the floor. For this purpose, it has created this line of mini-towers 500 Cima metal housings, which are required for all the installations that require. Are housings floor box for installation in surface-mounted on raised or concrete floor for mechanisms of electrical, voice, data and multimedia (VDM) for the tertiary sector. As in all its ranges, focus the simplicity and speed and ease of installation, Simon requires the use of fewer and fewer tools. It also comes with all accessories and small items needed for immediate installation. Maximum robustness: The metal structure in stainless steel and anodised aluminium, together with plastic trims, provides a balance between strength and appearance. Allows direct anchoring to the floor without the need for baseboards. Elements Simon fixed to the floor. It is a metal Mini-tower with 3 heights, 1 side for 6 elements stainless steel. Range Simon 500 Cima. Dimensions 235,5 x 221 x 68 mm metal finish of Stainless steel. To extract the installation means no tools.

FINISH

Metal

MATERIAL

Stainless steel

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using an adaptor)

PACKAGING CONTENTS

Metal mini tower, metal partition wall, ground connection cable, fixing studs, screws and installation manual

ETIM CLASS

EC001941

REMARKS

The frame holders include linkable parts that form blocks, allowing the electrical part to be separated from the voice and data part for ease of maintenance

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
1 and 2 sides

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C

ELECTROMAGNETIC IMMUNITY FOR VDM WIRING
Secured by installing the metal partition wall in the housings fitted into the box for this purpose.

IK CLASSIFICATION
08

IP RATING
IP4X

KIT AVAILABILITY
Yes

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 120° C

NUMBER OF MODULES
6

VERSION
1 side

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using the screws supplied

REMOVAL OF THE FRAME
Only with tool

INSTALLATION DIRECTION
Vertical

INSTALLATION TYPE
Suitable for installing in any floor type, raised or concrete

SCREWS REQUIRED FOR FLOOR FIXING
4

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053099308

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
1.611

PRODUCT NET WEIGHT
1.611

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053099308

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
67

PACKAGING WIDTH
168

PACKAGING LENGTH
272

PACKAGING MEASUREMENT UNIT
MMT

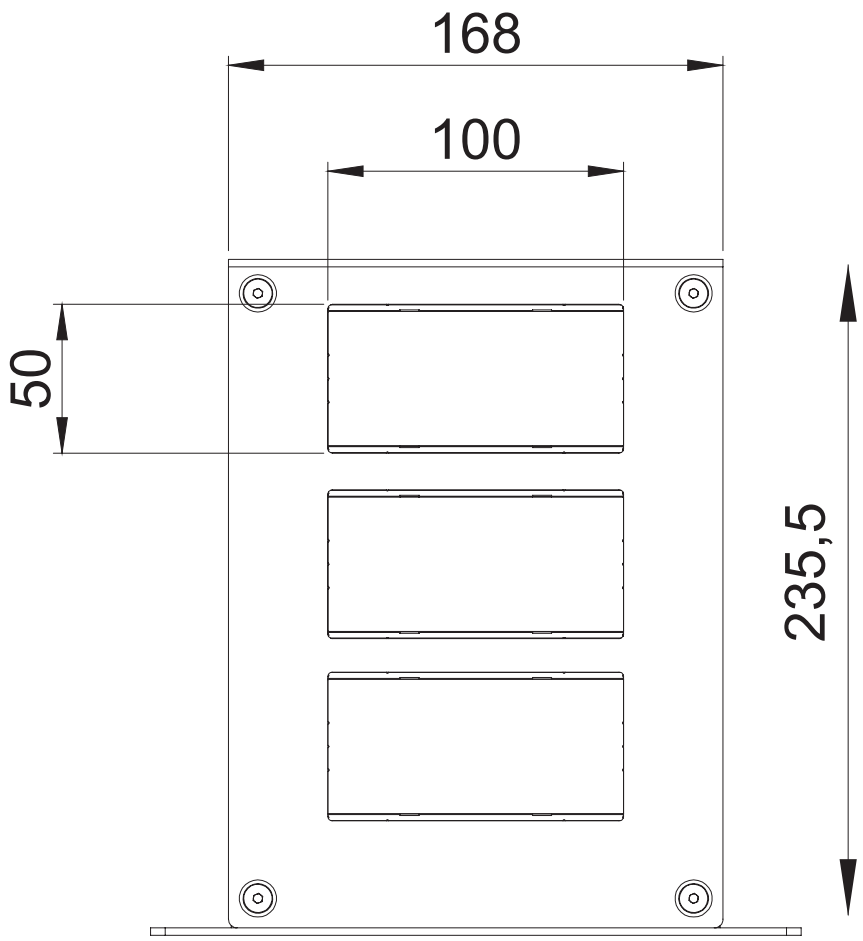
PACKAGING VOLUME
3.062

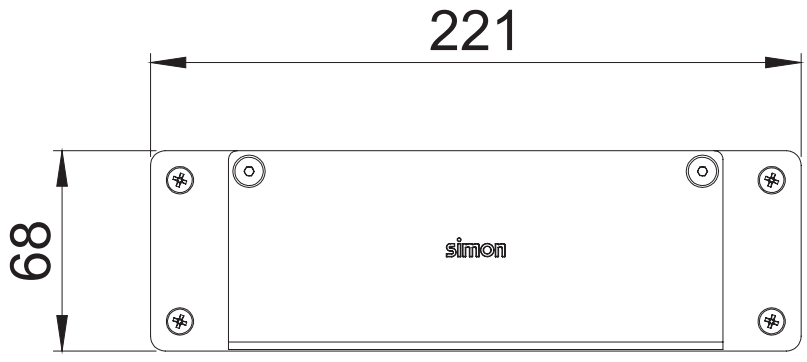
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.611

PACKAGING WEIGHT UNIT
KGM


168
100
50
235,5


221
68
simon